




Specification for:
ZW42908TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

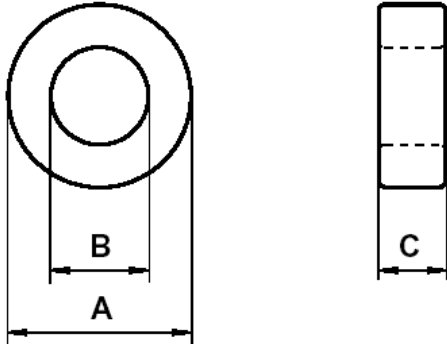

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	29	28.35	30.15
I.D. (B)	19	17.85	19.65
Ht. (C)	7.3	7.24	8.16

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
36	73.2	2632

INDUCTANCE

AL value (nH/T ²)	Test conditions
6340 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.33 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2,000 V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2005.12.16	Bare Nom HT = 7.5 Breakdown voltage > 1,000 V LF: General W material	Bare Nom HT = 7.3 Breakdown voltage > 2,000 V LF: Detail as indicated