



used for: DIN EN 60603-2 TYPE "C 1/2"

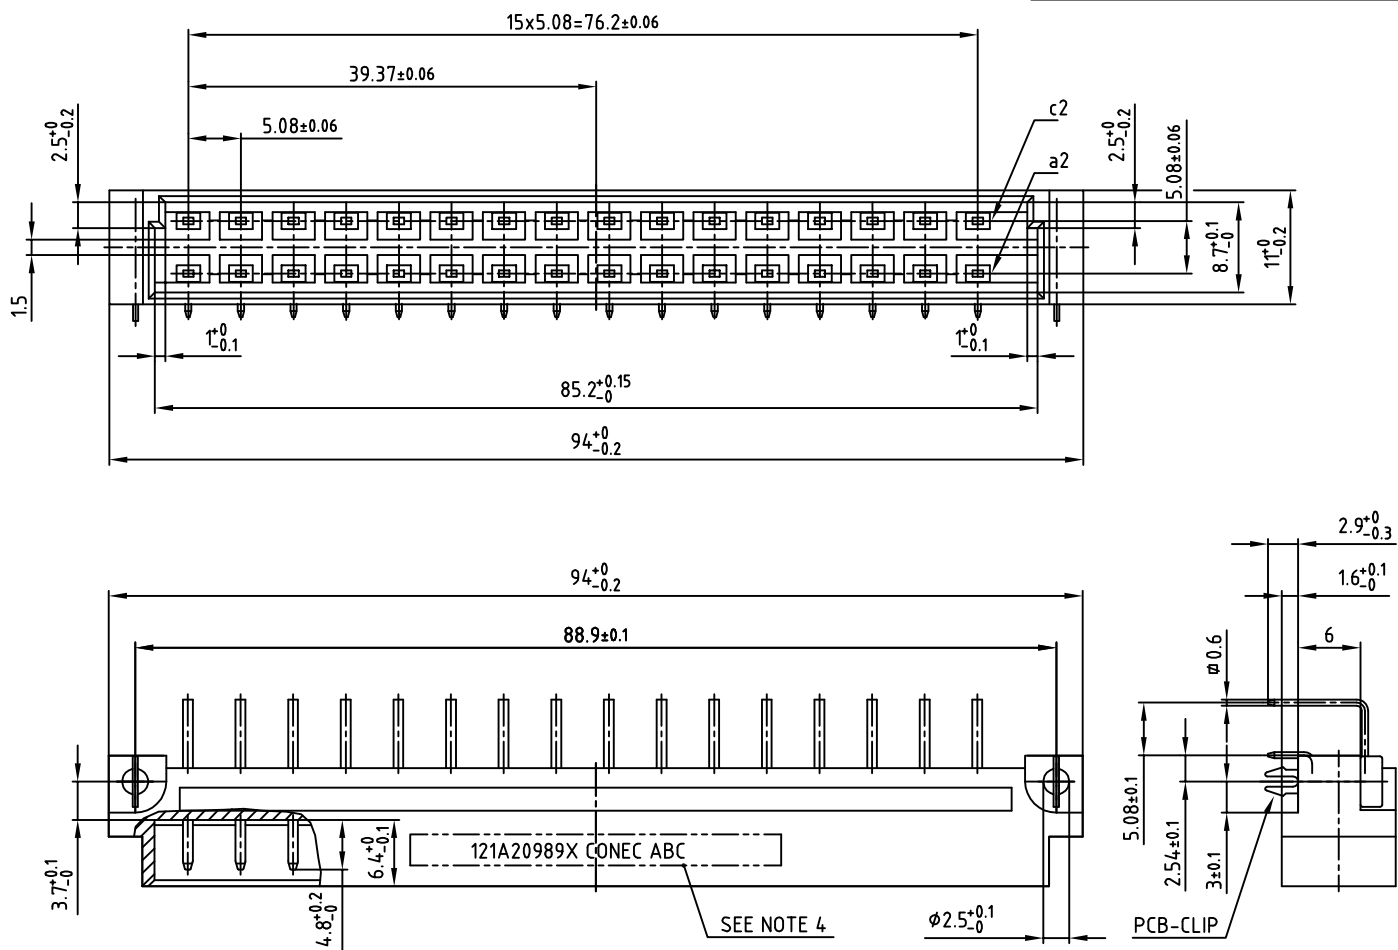

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
3. PCB-CLIPS: COPPER ALLOY
PCB HOLE $\phi 2.8 \pm 0.1$ / PCB THICKNESS $t = 1.6$ mm
4. CONNECTOR IS PART MARKED: 121A20989X CONEC ABC

P.C.B.-HOLE DRILLINGS

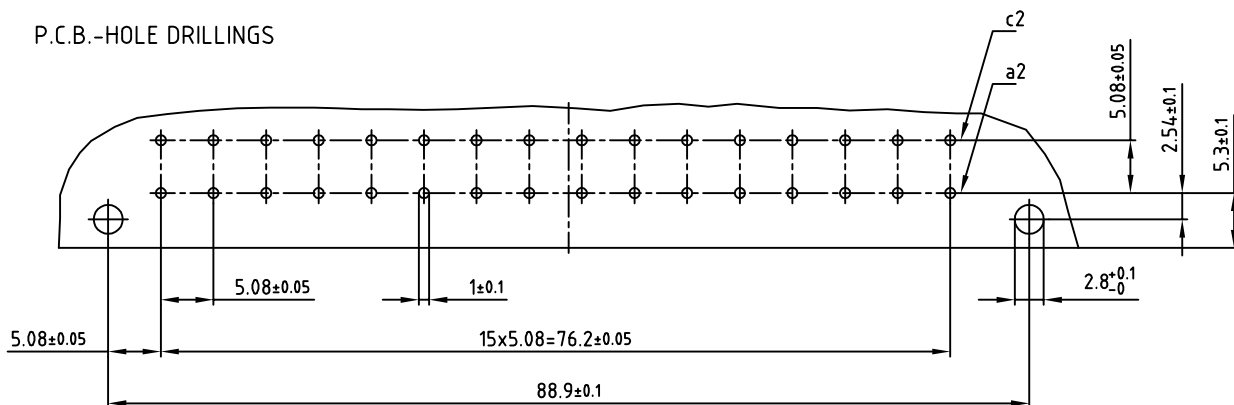

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

tolerance		dim. in mm	
2011	date	name	
drawn	28.03.	Henneboel	
appd.	28.03.	Mickenbecker	
norm	DIN EN 60603-2		
d-old			

scale:	2:1	
material:	SEE NOTES	
title:	MALE CONNECTOR TYPE "D" 32pos. ANGLED with clip	
dwg no:	12K1A722	DIN-A 3 sh:1/1
part no:	121A20989X	

