



382W023

a) Part as supplied.

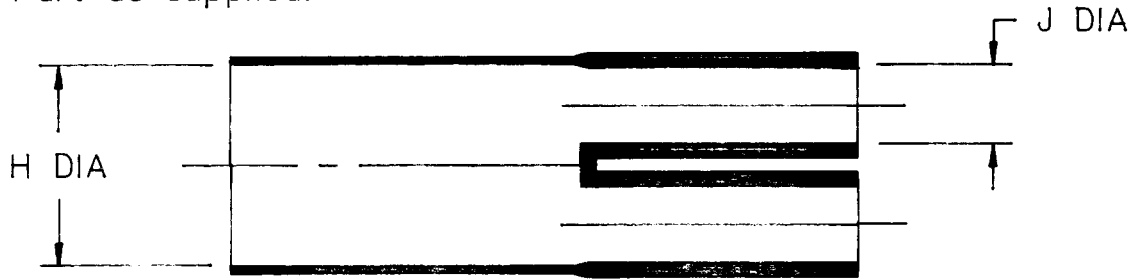

b) Part recovered.

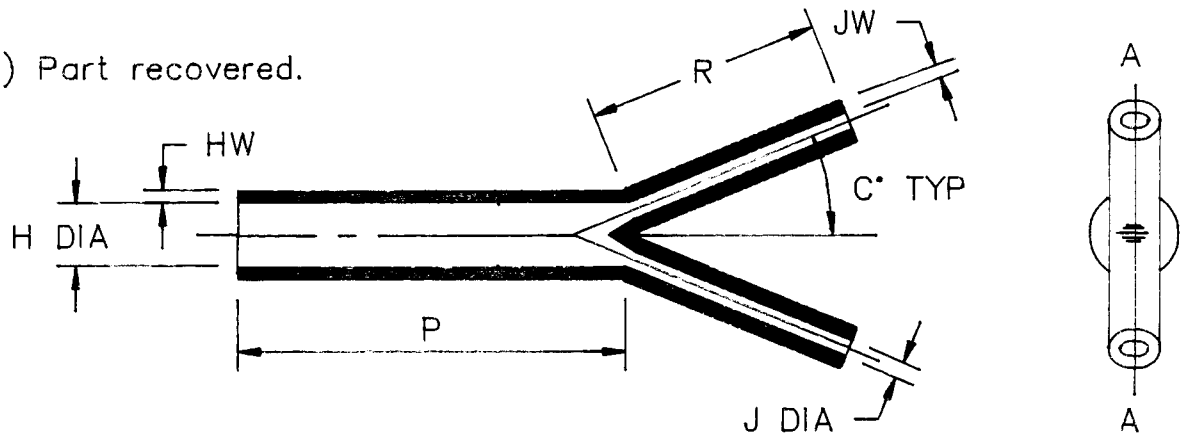

SECTION A-A

DIMENSIONS (IN MILLIMETRES)

H		J		p	R	HW	JW	C°
MIN	MAX	MIN	MAX	±10%	±10%	±20%	±20%	±5°
a	b	a	b	b	b	b	b	b
17,8	10,2	10,9	4,1	51	31	1,8	2,8	22,5°

Drawn A.LILLEY

Checked *sh*

Issue 3

Date DEC. 1987

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale

Approval

Design


KL

MKTG


[Signature]

Q.C.

[Signature]



Ordering Information

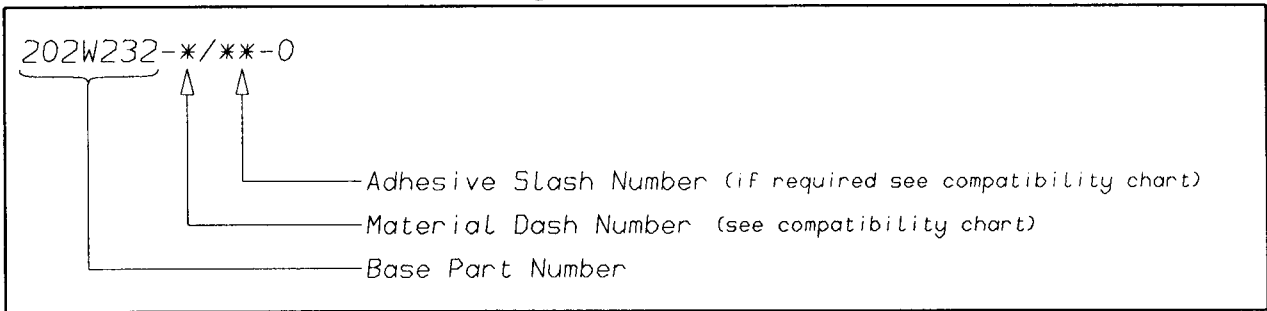

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923