


Off-the-Shelf (OTS) L1NK 396 Discrete Wire Cable Assemblies

molex

OTS L1NK 396 Discrete Wire Cable Assemblies offer a 3.96mm pitch, a maximum current rating of 10.5A, and they are available in a variety of cable lengths to facilitate both prototyping and global preproduction

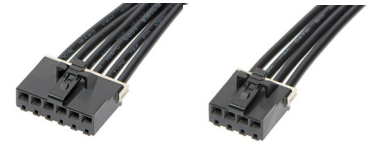

L1NK 396 Discrete Wire Cable Assembly

Features and Advantages

OTS L1NK 396 Discrete Wire Cable Assemblies deliver a maximum current rating of 10.5A with a 3.96mm pitch

Delivers reliable power for a wide range of space-constrained applications



Pin-to-pin mapping from receptacle to PCB header

Provides ready-to use, plug-and-play connections

UL 1015 discrete wires for cable assemblies

Ready to use in electronic appliance applications. Provide ease of design, prototyping and production


Meets 2011/65/EU RoHS Compliance

Decreases engineering time and resources

L1NK 396 Discrete Wire Cable Assemblies

Assembled in ISO/TS16949- certified facilities

Ensures high quality. Meets current automotive industry standards

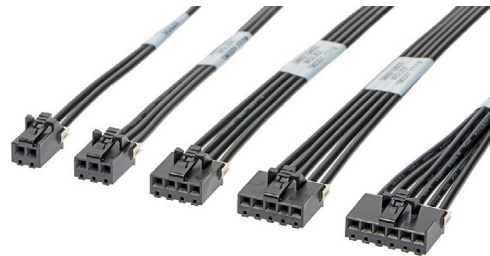

Reflow options available

Reducing labor costs, saving time and resources

Custom assemblies for production also available

Meets design needs after prototyping is complete. Molex's extensive design and manufacturing expertise can meet the unique challenges of the most demanding applications

TPA

Prevents terminal back-out

Markets and Applications

Consumer

Washers and dryers
Freezers
Gaming machines
Printers
Refrigerators
Scanners
Security systems
Vending machines
White goods

Medical

Diagnostic equipment
Patient monitors

Automotive

Harness manufacturers
Non-sealed applications
Inside devices
Charging stations

Industrial

Food and beverage
Assembly line equipment

Telecommunications/Networking


Routers and switches
Servers
Storage



Infotainment Systems



Appliances



Routers

Off-the-Shelf (OTS) L1NK 396 Discrete Wire Cable Assemblies

molex

Specifications

REFERENCE INFORMATION

20 part numbers available
NPI stocking package: 1,000 assemblies
Length Options: 150.00mm and 300.00mm
Circuit Size Options: 2 to 6 circuits
Wire Gauge: 18 AWG
UL 1015 Industry standard discrete wire

www.molex.com/link/otscableassemblies.html

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.