
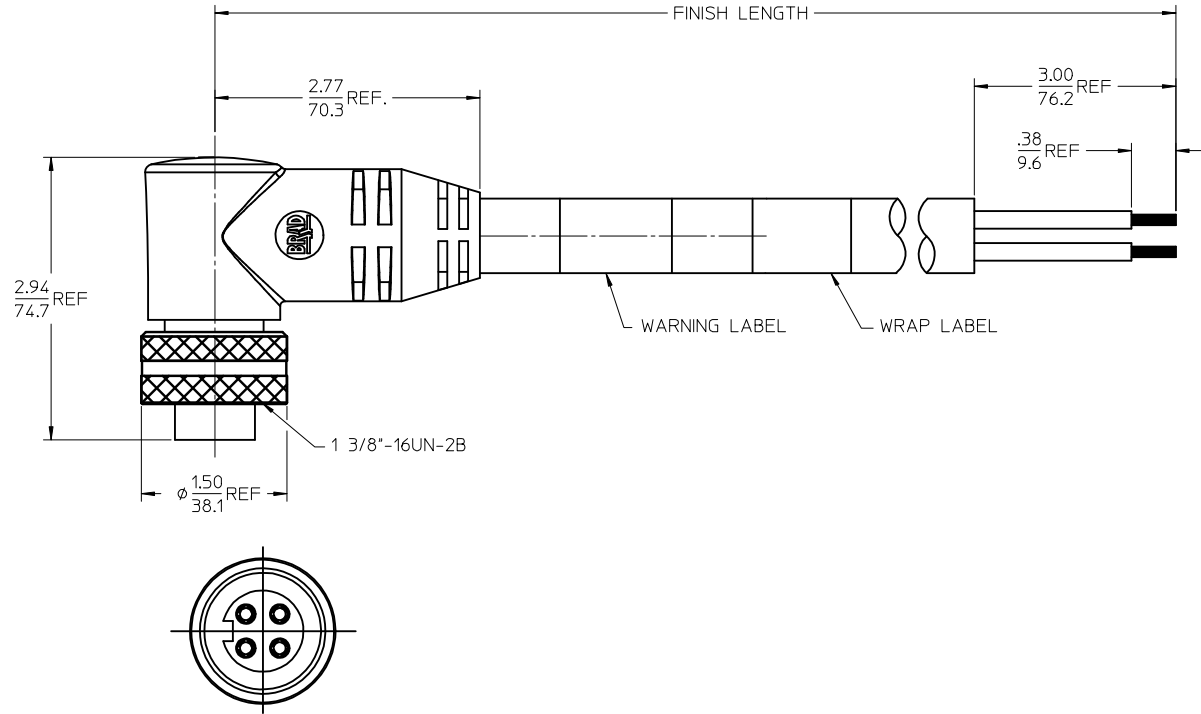


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630037	C03001A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630135	C04001A48M020	32	2M +89-0MM (6'7"+3.50-0)

FACE VIEW-FEMALE INSERT  
3 POLE      4 POLE

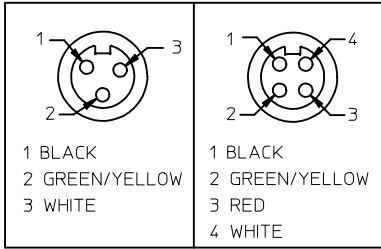

SPECS:  
OVERMOLD: GRAY PVC  
INSERT: BLACK PVC  
COUPLING NUT: ANODIZED ALUMINUM  
CABLE: #10AWG GRAY PVC  
DUAL RATED UL TC/OPEN WIRING & ST00W  
ELECTRICAL: 600V AC/DC

<b>UPDATED PROFILE</b> EC NO: IPG2014-1160 DRWNG:GGUSTAFSON 2013/12/23 CHKD:VOU 2014/01/15 APPR:BMWOODMAN 2014/05/12	<b>QUALITY SYMBOLS</b> ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>IN/MM</b>		SCALE <b>1:2</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .010 1 PLACE ± 0.25 ± .020	mm      INCH	DRAWN BY B. RUPERT	DATE 01/12/2010	<b>MOLEX INCORPORATED</b>		
<b>B</b>	<b>DESCRIPTION</b>	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		<b>SEE CHART</b>		DOCUMENT NO. SD-130063-037	SHEET NO. 1 OF 1	