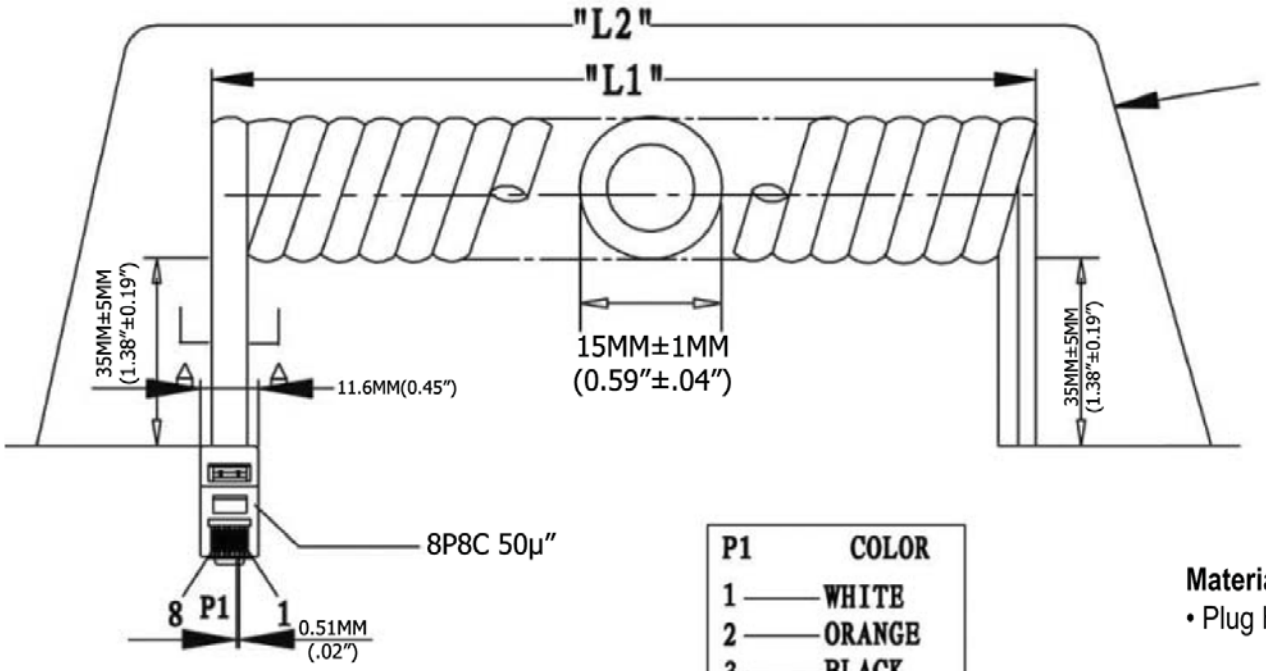



P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

Material:

- Plug Housing : Polycarbonate, clear
  Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54μ[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
  Insulation(X43): PP6331 ID 0.95-1.0
  Jacket: PVC NOUL 80P
  Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

RoHS Complaint

Scale	1:1							Name
TOLERANCE								
X.X	±0.40					Drawn	11.21.11	Chappell
X.XX	±0.25					Approved		
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
AT-C-26-8/8/W-25-OE

Title
NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Single Plug, 50μ" of contact plating, White

Drawing No.

rev00

Replace

Sheet