


Thin-Profile 7-mm Photoelectric Sensor

E3HF

Thin Flat-pack Style

- Just 7 mm (0.276 in) thick
- NPN transistor output switches 80 mA
- Choose Light-ON or Dark-ON operation models
- Top and side through holes make mounting easy
- 3 pairs of focusing slits supplied with separate type sensors

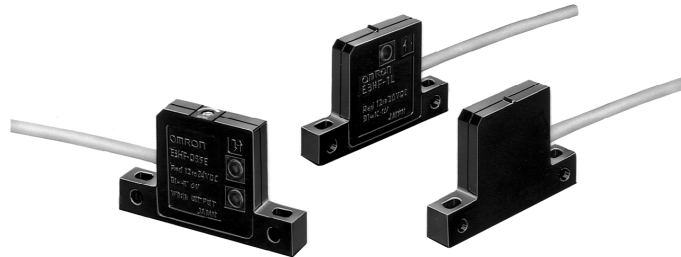

Ordering Information

■ SENSORS

Method of detection	Through-beam	Diffuse reflective	
Sensing distance	1 m (3.28 ft)	5 cm (1.97 in)	
Part number	Light-ON operation	E3HF-1E1	E3HF-DS5E1
	Dark-ON operation	E3HF-1E2	E3HF-DS5E2

Specifications


Part number	E3HF-1E□		E3HF-DS5E□□□
Method of detection	Through-beam		Diffuse reflective
Supply voltage	12 to 24 VDC		
Current consumption	Emitter	25 mA max.	30 mA max.
	Receiver	15 mA max.	
Sensing distance	1 m (3.28 ft)	50 mm (1.97 in) with 3 x 3 cm (1.18 x 1.18 in) 90% reflectance white mat paper	
Light source	Pulse modulate Infrared LED		
Detectable object type	Opaque materials, 6 mm (0.24 in) minimum dimension		Opaque materials
Operation mode	Light-ON	E3HF-□□□E1	
	Dark-ON	E3HF-□□□E2	
Sensitivity	Fixed	Adjustable	

(Table continues on the next page)


Engineering Data

■ EXCESS GAIN

Through-Beam Type

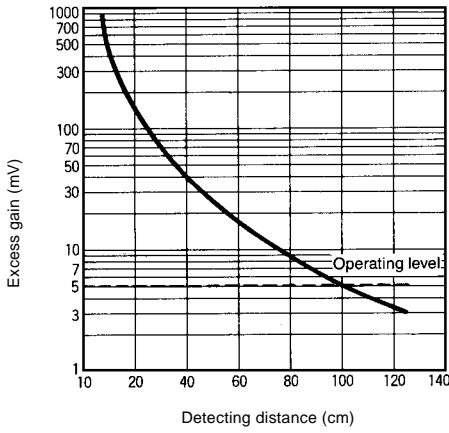


■ DIFFUSE REFLECTIVE TYPE

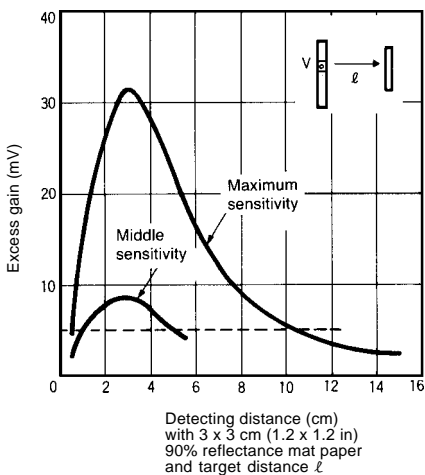


■ LIGHT SOURCE/RECEIVER SETTING RANGE

Through-Beam Type

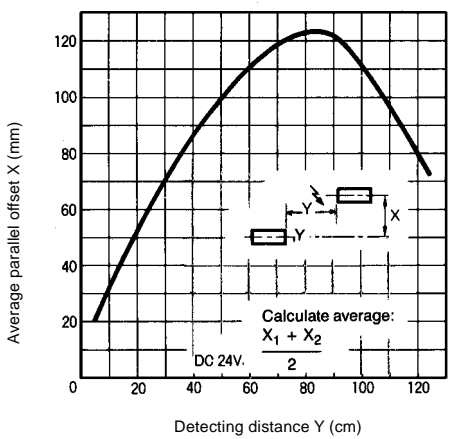

■ OPERATING RANGE

Diffuse Reflective Type

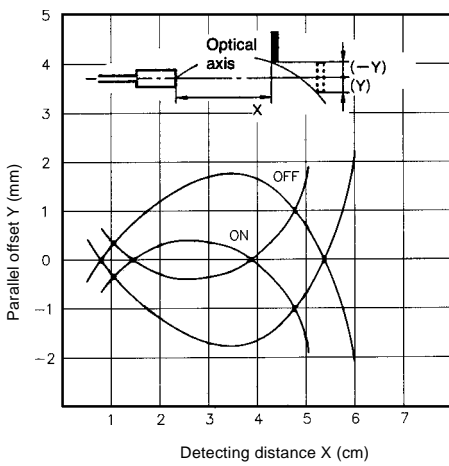


Dimensions


Unit: mm

Through-beam Type


Light Source

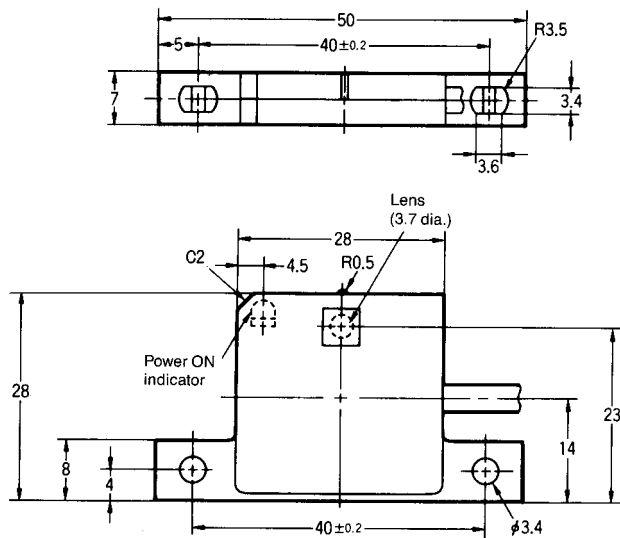

Receiver

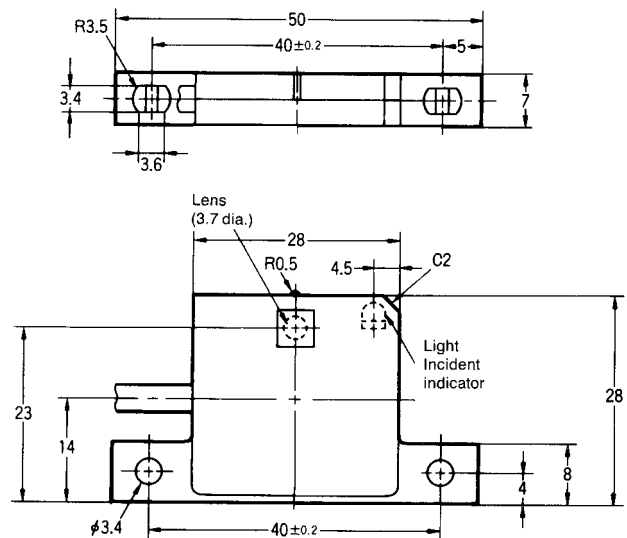

Diffuse Reflective Type

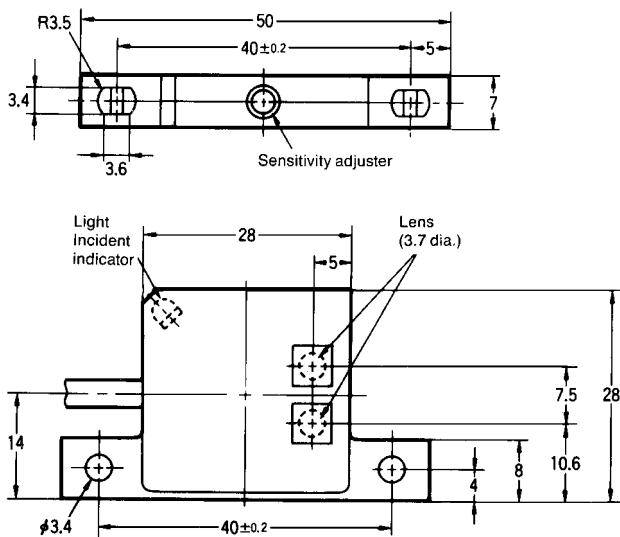

■ SLITS FOR THROUGH-BEAM

Using slits reduces the sensing distance and allows smaller objects to be detected.

Three pairs of slits are supplied with E3HF-1E1 and E3HF-1E2 sensors. The slits are decals that can be peeled off the protective backing sheet and applied to the emitter and receiver. See table below for dimensions of slit openings.

Slit width	0.5 mm (0.020 in)	1 mm (0.039 in)	2 mm (0.079 in)
Sensing distance	12 cm (4.74 in)	20 cm (7.87 in)	40 cm (15.75 in)
Minimum detectable object size	0.5 mm (0.020 in)	1 mm (0.039 in)	2 mm (0.079 in)

OMRON**OMRON ELECTRONICS LLC**

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

Cat. No. CEDSAX4

11/01

OMRON ON-LINEGlobal - <http://www.omron.com>USA - <http://www.omron.com/oei>Canada - <http://www.omron.com/oci>

Specifications subject to change without notice.

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465

Printed in the U.S.A.