

MIKROE

mikromedia 

CAPACITIVE FPI

USER MANUAL

Thank you for choosing Mikroë!

We present you the ultimate multimedia solution for embedded development.

Elegant on the surface, yet extremely powerful on the inside, we have designed it to inspire outstanding achievements.

And now, it's all yours.

Enjoy premium.

MIKROË


Time-saving embedded tools



1



2

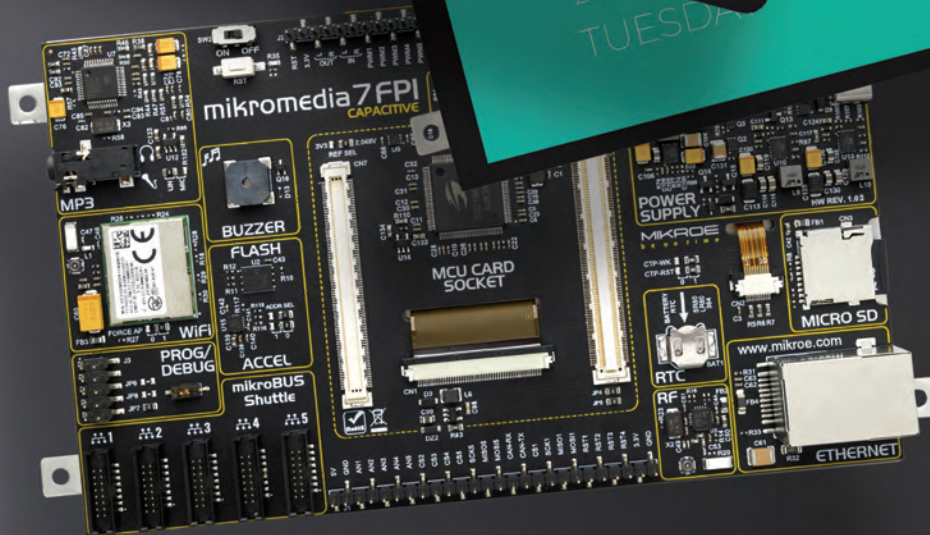

Choose your own frame
Identical in the back, options in the front.

- 1 Mikromedia 7 Capacitive FPI with bezel
- 2 Mikromedia 7 Capacitive FPI with frame

mikromedia 7 CAPACITIVE FPI is a compact development board, designed as a complete solution for the rapid development of multimedia and GUI-centric applications. Featuring a large 7" capacitive touch screen driven by a powerful graphics controller that can display a true-color 24-bit color palette [16.7 million colors], DSP-powered embedded sound CODEC IC, MCU Card socket, a set of five compact mikroBUS™ Shuttle connectors, a set of very useful general-purpose sensors and devices, and more, it represents a perfect solution for the rapid development of many different types of applications.

At its core, there is an MCU Card socket which allows mikromedia 7 CAPACITIVE FPI (referred to as "mikromedia 7" in the following text) to use different microcontrollers [MCUs] mounted on a standardized MCU Card, regardless of their vendor or architecture. Although MCU Card standard enables you to place any MCU Card available, to fully use all mikromedia 7 onboard features, MCUs whose pin count is 144 or more are the right choice. This provides a tremendous amount of flexibility, allowing mikromedia 7 to adapt to any specific application requirements, be it a demanding task of displaying fluid and glitch-free multimedia content, or something much simpler. The mikromedia 7 development board features many connectivity options, including USB, Ethernet, RF, WiFi, CAN

[on the MCU Card that supports it] and two 1x26 pin headers. However, five compact-sized mikroBUS Shuttle connectors represent the most distinctive connectivity feature, allowing access to a huge base of Click boards™, growing on a daily basis.

Each section of mikromedia 7 is clearly marked, offering an intuitive and clean interface. Each section contains a single feature [WiFi, RF, MP3...] along with the accompanying components and configuration jumpers. This makes working with the development board much simpler and thus, faster.

The usability of mikromedia 7 doesn't end with its ability to accelerate the prototyping and application development stages: it is designed as a complete solution which can be implemented directly into any project, with no additional hardware modifications required. We offer two types of mikromedia 7 FPI boards. The first one has a TFT display with a bezel around it and is ideal for handheld devices. The other mikromedia 7 FPI board has a TFT display with a metal frame, and four corner mounting holes that enable simple installation in various kinds of industrial appliances. With both types, a nice casing is all that you need to turn the mikromedia 7 FPI development board into a fully functional design.

1. MCU card

mikromedia 7 development board offers support for various MCU architectures, mounted on a standardized MCU Card **[1]**.

MCU Card contains two 168-pin mezzanine connectors **[2]** that allow interfacing with the development board: one male and one female. Likewise, the mikromedia 7 development board is equipped with a pair of complementary connectors **[3]**, eliminating any possibility of the incorrect orientation, allowing MCU Card to be installed very easily.

Besides these two 168-pin mezzanine connectors, MCU Card may also contain multiplexing circuits, Ethernet PHY ICs, CAN transceivers and connectors, crystal oscillators, clock generators, and other electronic components necessary for the proper operation of the MCU. This makes each MCU Card a self-contained unit, allowing the development board to operate on a logic level, not having to facilitate specific requirements of many different MCUs.

This also allows the MCU to be freely chosen, not having to worry about its pin count, compatibility, and similar issues. Most importantly, it makes swapping between different MCUs during the development phase very simple, without any additional hardware interventions required.

MCU Card must be installed prior to using the mikromedia 7 development board. More information about MCU Cards can be found at the www.mikroe.com/development-boards/mcu-cards

NOTE


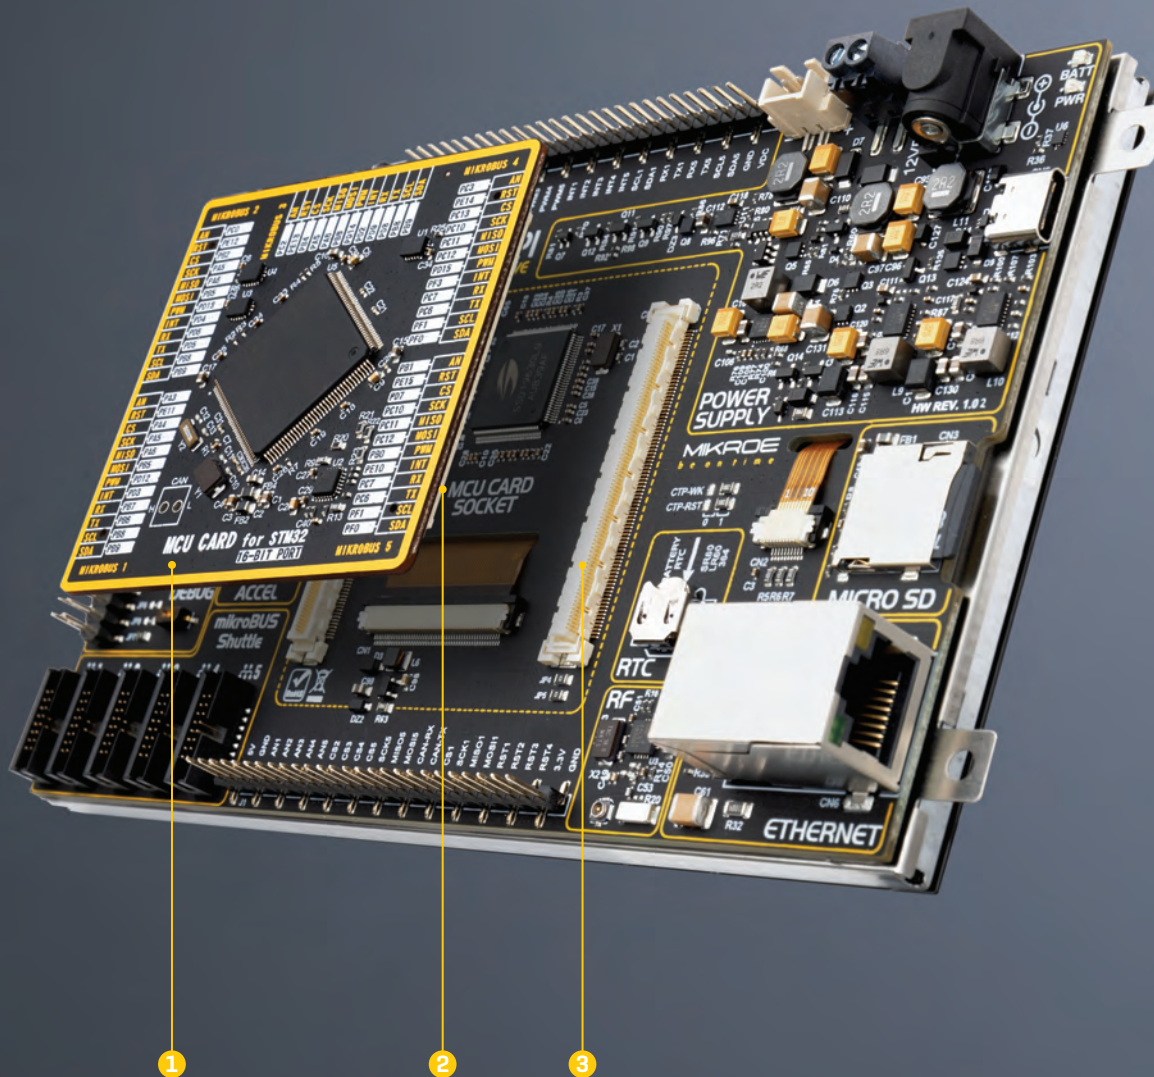



Figure 1.: mikromedia 7 CAPACITIVE FPI FRAME with MCU card view

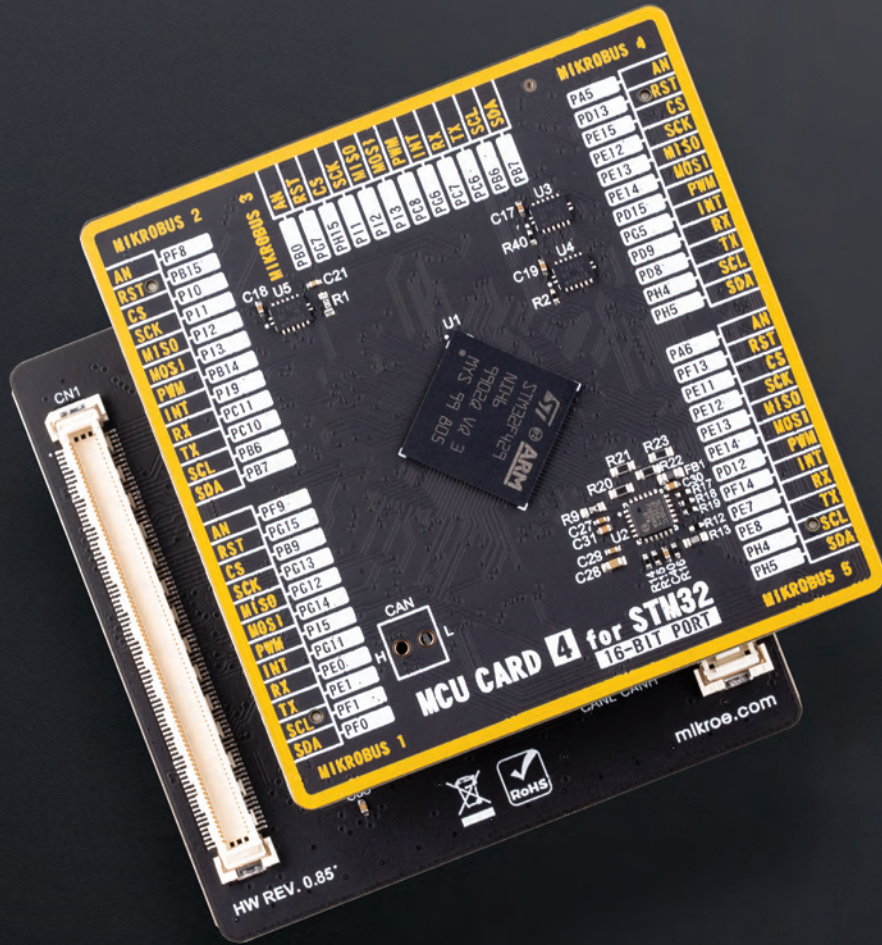

More than **350 MCUs** regardless of their vendor. One **MCU card standard** supports **multiple architectures** ARM, PIC32, dsPIC, PIC, AVR through different vendors: Microchip, ST, NXP, TI and many more yet to come!

www.mikroe.com/development-boards/mcu-cards

Figure 2: Front and back partial view

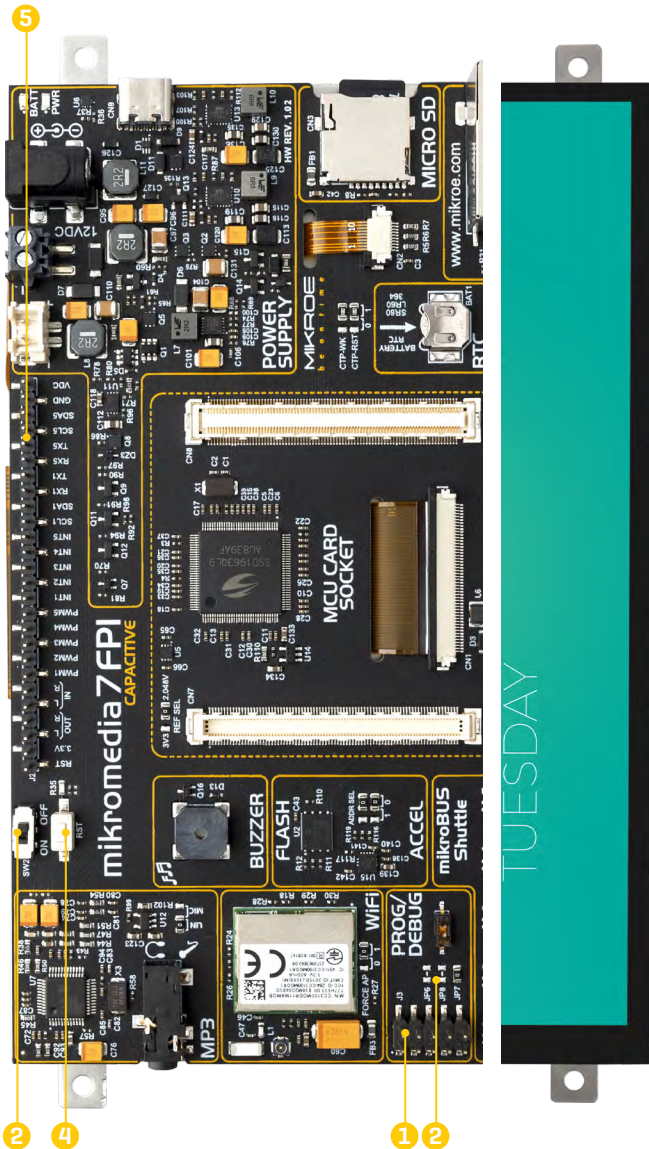

1.1 MCU programming/debugging

The installed MCU (referred to as “host MCU” in the following text) can be programmed and debugged over the JTAG/SWD compatible 2x5 pin header (1), labeled as PROG/DEBUG. This header allows an external programmer (e.g. CODEGRIP or mikroProg) to be used. To enable the JTAG interface, two SMD jumpers labeled as JP6 and JP8 (2), located in the PROG/DEBUG section, have to be populated. These jumpers are unpopulated by default, optimizing the pin count so that more pins could be used for a large number of onboard modules and peripherals. Hence, SWD interface is enabled/supported out of the box.

If your MCU card has preprogrammed bootloader, MCU can be programmed by using the mikrobootloader application. All the information about the bootloader software can be found on the following page: www.mikroe.com/mikrobootloader

A switch labeled as SW1 (3) is used to specify whether CODEGRIP/mikroProg or a third-party programmer is connected to the JTAG/SWD header.

SW1 – left position: to use CODEGRIP/mikroProg

SW1 – right position: to use a third-party programmer

Before usage, please check if the programmer pinout and the 2x5 pin header pinout are compatible. Based on the used programmer/debugger tool pinout, a corresponding adapter might be needed [e.g. mikroProg for PIC].

NOTE

1.2 MCU reset

The mikromedia 7 development board is equipped with the reset button labeled as RST (4), located on the back of the board. It is used to generate a LOW logic level on the MCU reset pin. The RST pin of the host MCU is also routed to the pin 1 of the 1x26 pin header (5), allowing an external signal to reset the device.



MIKROBOTS

MIKROBOTS

- POWER
- USB-LINK
- NET-LINK
- ACTIVE
- DATA

CODEGRIP
USB/WIFI PROGRAMMER & DEBUGGER



CODEGRIP ADAPT
10-pin 0.10" ARM Cortex Debug

10-pin

10-pin

10-pin

10-pin

10-pin

10-pin

10-pin

10-pin

10-pin

mikromedia 7 FPI

CAPACITIVE

MP3

BUZZER

FLASH

WiFi

PROG/DEBUG

ACCEL

mikroBUS Shuttle

1 2 3 4 5

MICROBUS 2

MICROBUS 3

MICROBUS 4

MICROBUS 1

MICROBUS 5

MCU CARD for STM32
16-BIT PORT

AN	PC0	PC3	AN
RST	PE12	PE14	RST
CS	PB2	PC13	CS
SCK	PA5	PC10	SCK
MISO	PA6	PC11	MISO
MOSI	PB5	PC12	MOSI
PWM	PD13	PD15	PWM
INT	PD4	PF3	INT
RX	PD6	PC7	RX
TX	PD5	PC6	TX
SCL	PB8	PF1	SCL
SDA	PB9	PF0	SDA
AN	PA3	PB1	AN
RST	PE11	PE15	RST
CS	PA4	PD7	CS
SCK	PA5	PC10	SCK
MISO	PA6	PC11	MISO
MOSI	PB5	PC12	MOSI
PWM	PD12	PB0	PWM
INT	PD3	PE10	INT
RX	PB7	PC7	RX
TX	PB6	PC6	TX
SCL	PB8	PF1	SCL
SDA	PB9	PF0	SDA

POWER SUPPLY

MIKA

BATTERY

RTC

RF

SW2 **ON OFF**

RST

R35

RST

Q7 Q8 Q9 Q10 Q11

Q12 Q13 Q14 Q15 Q16

Q17 Q18 Q19 Q20 Q21

Q22 Q23 Q24 Q25 Q26

Q27 Q28 Q29 Q30 Q31

Q32 Q33 Q34 Q35 Q36

Q37 Q38 Q39 Q40 Q41

Q42 Q43 Q44 Q45 Q46

Q47 Q48 Q49 Q50 Q51

Q52 Q53 Q54 Q55 Q56

Q57 Q58 Q59 Q60 Q61

Q62 Q63 Q64 Q65 Q66

Q67 Q68 Q69 Q70 Q71

Q72 Q73 Q74 Q75 Q76

Q77 Q78 Q79 Q80 Q81

Q82 Q83 Q84 Q85 Q86

Q87 Q88 Q89 Q90 Q91

Q92 Q93 Q94 Q95 Q96

Q97 Q98 Q99 Q100 Q101

Q102 Q103 Q104 Q105 Q106

Q107 Q108 Q109 Q110 Q111

Q112 Q113 Q114 Q115 Q116

Q117 Q118 Q119 Q120 Q121

Q122 Q123 Q124 Q125 Q126

Q127 Q128 Q129 Q130 Q131

Q132 Q133 Q134 Q135 Q136

Q137 Q138 Q139 Q140 Q141

Q142 Q143 Q144 Q145 Q146

Q147 Q148 Q149 Q150 Q151

Q152 Q153 Q154 Q155 Q156

Q157 Q158 Q159 Q160 Q161

Q162 Q163 Q164 Q165 Q166

Q167 Q168 Q169 Q170 Q171

Q172 Q173 Q174 Q175 Q176

Q177 Q178 Q179 Q180 Q181

Q182 Q183 Q184 Q185 Q186

Q187 Q188 Q189 Q190 Q191

Q192 Q193 Q194 Q195 Q196

Q197 Q198 Q199 Q200 Q201

Q202 Q203 Q204 Q205 Q206

Q207 Q208 Q209 Q210 Q211

Q212 Q213 Q214 Q215 Q216

Q217 Q218 Q219 Q220 Q221

Q222 Q223 Q224 Q225 Q226

Q227 Q228 Q229 Q230 Q231

Q232 Q233 Q234 Q235 Q236

Q237 Q238 Q239 Q240 Q241

Q242 Q243 Q244 Q245 Q246

Q247 Q248 Q249 Q250 Q251

Q252 Q253 Q254 Q255 Q256

Q257 Q258 Q259 Q260 Q261

Q262 Q263 Q264 Q265 Q266

Q267 Q268 Q269 Q270 Q271

Q272 Q273 Q274 Q275 Q276

Q277 Q278 Q279 Q280 Q281

Q282 Q283 Q284 Q285 Q286

Q287 Q288 Q289 Q290 Q291

Q292 Q293 Q294 Q295 Q296

Q297 Q298 Q299 Q300 Q301

Q302 Q303 Q304 Q305 Q306

Q307 Q308 Q309 Q310 Q311

Q312 Q313 Q314 Q315 Q316

Q317 Q318 Q319 Q320 Q321

Q322 Q323 Q324 Q325 Q326

Q327 Q328 Q329 Q330 Q331

Q332 Q333 Q334 Q335 Q336

Q337 Q338 Q339 Q340 Q341

Q342 Q343 Q344 Q345 Q346

Q347 Q348 Q349 Q350 Q351

Q352 Q353 Q354 Q355 Q356

Q357 Q358 Q359 Q360 Q361

Q362 Q363 Q364 Q365 Q366

Q367 Q368 Q369 Q370 Q371

Q372 Q373 Q374 Q375 Q376

Q377 Q378 Q379 Q380 Q381

Q382 Q383 Q384 Q385 Q386

Q387 Q388 Q389 Q390 Q391

Q392 Q393 Q394 Q395 Q396

Q397 Q398 Q399 Q400 Q401

Q402 Q403 Q404 Q405 Q406

Q407 Q408 Q409 Q410 Q411

Q412 Q413 Q414 Q415 Q416

Q417 Q418 Q419 Q420 Q421

Q422 Q423 Q424 Q425 Q426

Q427 Q428 Q429 Q430 Q431

Q432 Q433 Q434 Q435 Q436

Q437 Q438 Q439 Q440 Q441

Q442 Q443 Q444 Q445 Q446

Q447 Q448 Q449 Q450 Q451

Q452 Q453 Q454 Q455 Q456

Q457 Q458 Q459 Q460 Q461

Q462 Q463 Q464 Q465 Q466

Q467 Q468 Q469 Q470 Q471

Q472 Q473 Q474 Q475 Q476

Q477 Q478 Q479 Q480 Q481

Q482 Q483 Q484 Q485 Q486

Q487 Q488 Q489 Q490 Q491

Q492 Q493 Q494 Q495 Q496

Q497 Q498 Q499 Q500 Q501

Q502 Q503 Q504 Q505 Q506

Q507 Q508 Q509 Q510 Q511

Q512 Q513 Q514 Q515 Q516

Q517 Q518 Q519 Q520 Q521

Q522 Q523 Q524 Q525 Q526

Q527 Q528 Q529 Q530 Q531

Q532 Q533 Q534 Q535 Q536

Q537 Q538 Q539 Q540 Q541

Q542 Q543 Q544 Q545 Q546

Q547 Q548 Q549 Q550 Q551

Q552 Q553 Q554 Q555 Q556

Q557 Q558 Q559 Q560 Q561

Q562 Q563 Q564 Q565 Q566

Q567 Q568 Q569 Q570 Q571

Q572 Q573 Q574 Q575 Q576

Q577 Q578 Q579 Q580 Q581

Q582 Q583 Q584 Q585 Q586

Q587 Q588 Q589 Q590 Q591

Q592 Q593 Q594 Q595 Q596

Q597 Q598 Q599 Q600 Q601

Q602 Q603 Q604 Q605 Q606

Q607 Q608 Q609 Q610 Q611

Q612 Q613 Q614 Q615 Q616

Q617 Q618 Q619 Q620 Q621

Q622 Q623 Q624 Q625 Q626

Q627 Q628 Q629 Q630 Q631

Q632 Q633 Q634 Q635 Q636

Q637 Q638 Q639 Q640 Q641

Q642 Q643 Q644 Q645 Q646

Q647 Q648 Q649 Q650 Q651

Q652 Q653 Q654 Q655 Q656

Q657 Q658 Q659 Q660 Q661

Q662 Q663 Q664 Q665 Q666

Q667 Q668 Q669 Q670 Q671

Q672 Q673 Q674 Q675 Q676

Q677 Q678 Q679 Q680 Q681

Q682 Q683 Q684 Q685 Q686

Q687 Q688 Q689 Q690 Q691

Q692 Q693 Q694 Q695 Q696

Q697 Q698 Q699 Q700 Q701

Q702 Q703 Q704 Q705 Q706

Q707 Q708 Q709 Q710 Q711

Q712 Q713 Q714 Q715 Q716

Q717 Q718 Q719 Q720 Q721

Q722 Q723 Q724 Q725 Q726

Q727 Q728 Q729 Q730 Q731

Q732 Q733 Q734 Q735 Q736

Q737 Q738 Q739 Q740 Q741

Q742 Q743 Q744 Q745 Q746

Q747 Q748 Q749 Q750 Q751

Q752 Q753 Q754 Q755 Q756

Q757 Q758 Q759 Q760 Q761

Q762 Q763 Q764 Q765 Q766

Q767 Q768 Q769 Q770 Q771

Q772 Q773 Q774 Q775 Q776

Q777 Q778 Q779 Q780 Q781

Q782 Q783 Q784 Q785 Q786

Q787 Q788 Q789 Q790 Q791

Q792 Q793 Q794 Q795 Q796

Q797 Q798 Q799 Q800 Q801

Q802 Q803 Q804 Q805 Q806

Q807 Q808 Q809 Q810 Q811

Q812 Q813 Q814 Q815 Q816

Q817 Q818 Q819 Q820 Q821

Q822 Q823 Q824 Q825 Q826

Q827 Q828 Q829 Q830 Q831

Q832 Q833 Q834 Q835 Q836

Q837 Q838 Q839 Q840 Q841

Q842 Q843 Q844 Q845 Q846

Q847 Q848 Q849 Q850 Q851

Q852 Q853 Q854 Q855 Q856

Q857 Q858 Q859 Q860 Q861

Q862 Q863 Q864 Q865 Q866

Q867 Q868 Q869 Q870 Q871

Q872 Q873 Q874 Q875 Q876

Q877 Q878 Q879 Q880 Q881

Q882 Q883 Q884 Q885 Q886

Q887 Q888 Q889 Q890 Q891

Q892 Q893 Q894 Q895 Q896

Q897 Q898 Q899 Q900 Q901

Q902 Q903 Q904 Q905 Q906

Q907 Q908 Q909 Q910 Q911

Q912 Q913 Q914 Q915 Q916

Q917 Q918 Q919 Q920 Q921

Q922 Q923 Q924 Q925 Q926

Q927 Q928 Q929 Q930 Q931

Q932 Q933 Q934 Q935 Q936

Q937 Q938 Q939 Q940 Q941

Q942 Q943 Q944 Q945 Q946

Q947 Q948 Q949 Q950 Q951

Q952 Q953 Q954 Q955 Q956

Q957 Q958 Q959 Q960 Q961

Q962 Q963 Q964 Q965 Q966

Q967 Q968 Q969 Q970 Q971

Q972 Q973 Q974 Q975 Q976

Q977 Q978 Q979 Q980 Q981


Q982 Q983 Q984 Q985 Q986

Q987 Q988 Q989 Q990 Q991

Q992 Q993 Q994 Q995 Q996

Q997 Q998 Q999 Q1000 Q1001

2. Power supply unit

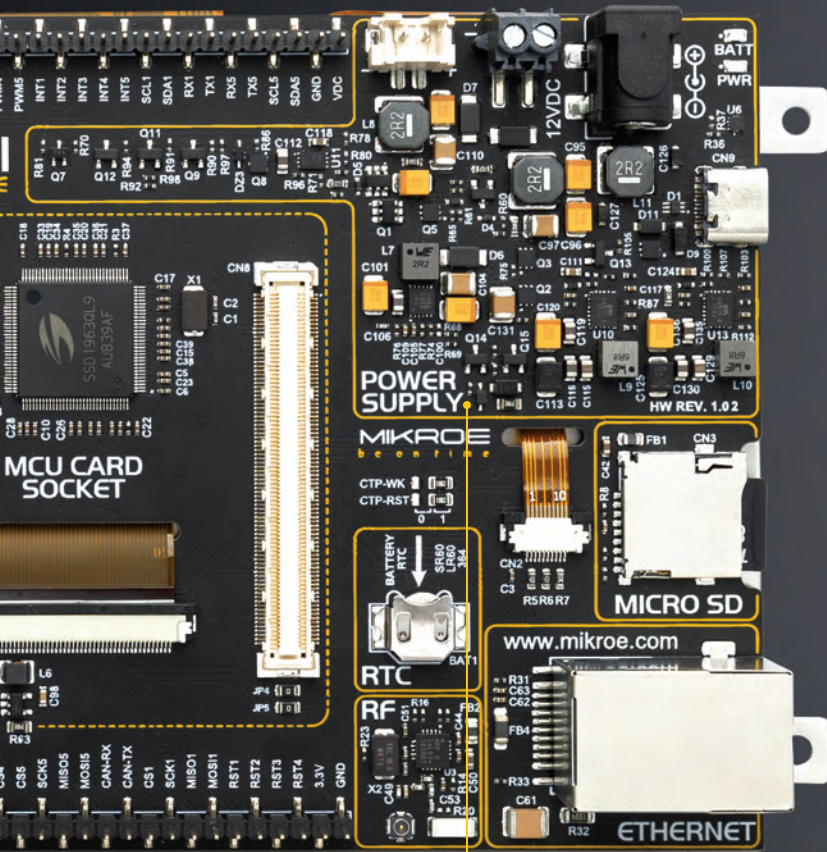

1 Figure 3: Power supply unit view

The power supply unit [PSU] **[1]** provides clean and regulated power, necessary for proper operation of the mikromedia 7 development board. The host MCU, along with the rest of the peripherals, demands regulated and noise-free power supply. Therefore, PSU is carefully designed to regulate, filter, and distribute the power to all parts of mikromedia 7. It is equipped with four different power supply inputs, offering all the flexibility that mikromedia 7 needs, especially when used on the field or as an integrated element of a larger system. In the case when multiple power sources are used, an automatic power switching circuit with predefined priorities ensures that the most appropriate will be used.

The PSU also contains a reliable and safe battery charging circuit, which allows a single-cell Li-Po/Li-Ion battery to be charged. Power OR-ing option is also supported providing uninterrupted power supply (UPS) functionality when an external or USB power source is used in combination with the battery.

2.1 Detailed description

The PSU has a very demanding task of providing power for the host MCU and all the peripherals onboard, as well as for the externally connected peripherals. One of the key requirements is to provide enough current, avoiding the voltage drop at the output. Also, the PSU must be able to support multiple power sources with different nominal voltages, allowing switching between them by priority. The PSU design, based on a set of high-performance power switching ICs produced by Microchip, ensures a very good quality of the output voltage, high current rating, and reduced electromagnetic radiation.

At the input stage of the PSU, the MIC2253, a high-efficiency boost regulator IC with overvoltage protection ensures that the voltage input at the next stage is well-regulated and stable. It is used to boost the voltage of low-voltage power sources (a Li-Po/Li-Ion battery and USB), allowing the next stage to deliver well-regulated 3.3V and 5V to the development board. A set of discrete components are used to determine if the input power source requires a voltage boost. When multiple power sources are connected at once, this circuitry is also used to determine the input priority level: externally connected 12V PSU, power over USB, and the Li-Po/Li-Ion battery. The transition between available power sources is designed to provide uninterrupted operation of the development board.

The next PSU stage uses two MIC28511, synchronous step-down (buck) regulators, capable of providing up to 3A. The MIC28511 IC utilizes the

HyperSpeed Control® and HyperLight Load® architectures, providing an ultra-fast transient response and high light-load efficiency. Each of the two buck regulators is used to supply power to the corresponding power supply rail (3.3V and 5V), throughout the entire development board and connected peripherals.

2.2 Voltage reference

The MCP1501, a high-precision buffered voltage reference from Microchip is used to provide a very precise voltage reference with no voltage drift. It can be used for various purposes: the most common uses include voltage references for A/D converters, D/A converters, and comparator peripherals on the host MCU. The MCP1501 can provide up to 20mA, limiting its use exclusively to voltage comparator applications with high input impedance. Depending on the specific application, either 3.3V from the power rail, or 2.048V from the MCP1501 can be selected. An onboard SMD jumper labeled as REF SEL, located in a separate section labeled as VREF, offers two voltage reference choices:

- REF: 2.048V from the high-precision voltage reference IC
- 3V3: 3.3V from the main power supply rail

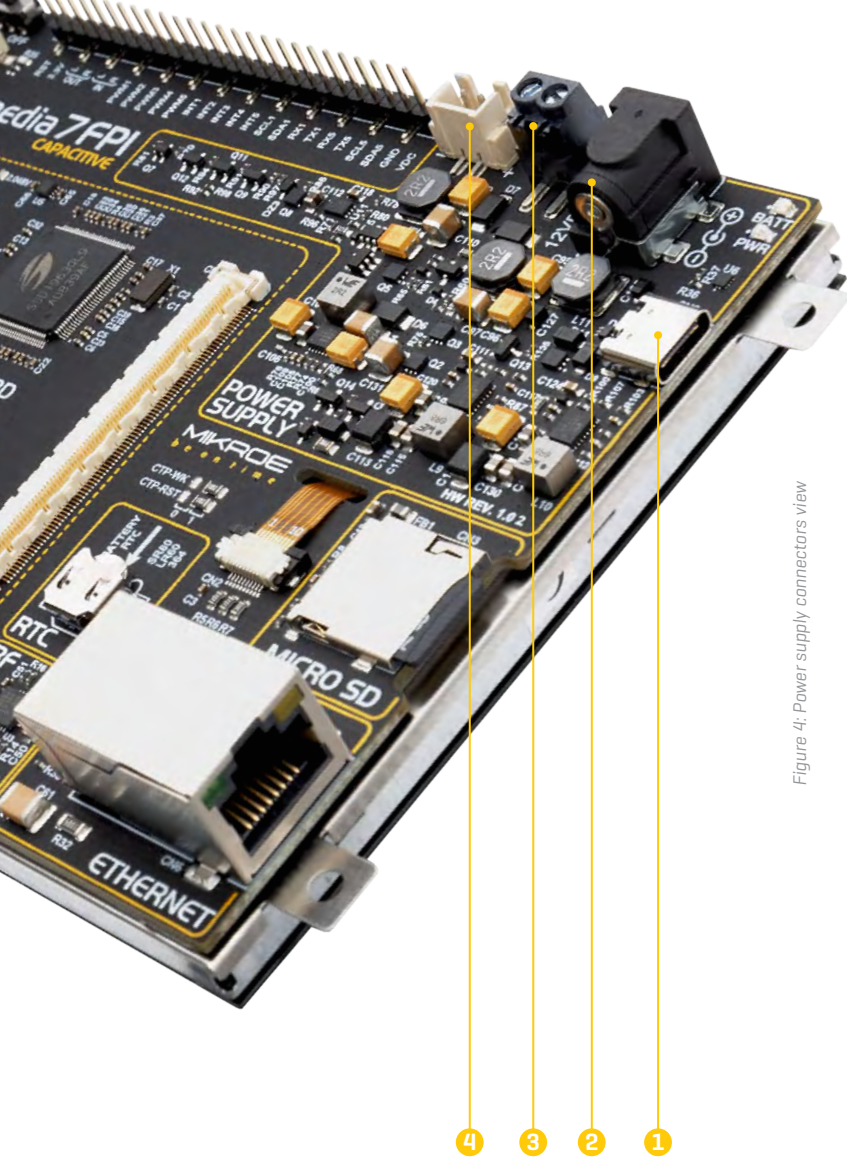


Figure 4: Power supply connectors view

2.3 PSU connectors

As explained, the advanced design of the PSU allows several types of power sources to be used, offering unprecedented flexibility: when powered by a Li-Po/Li-Ion battery, it offers an ultimate degree of autonomy. For situations where the power is an issue, it can be powered by an external 12VDC power supply, connected over the 5.5mm barrel connector or over the two-pole screw terminal. Power is not an issue even if it is powered over the USB cable. It can be powered over the USB-C connector, using power supply delivered by the USB HOST [i.e. personal computer], USB wall adapter, or a battery power bank.

There are four power supply connectors available, each with its unique purpose:

- CN9: USB-C connector **[1]**
- CN11: 12VDC barrel-type connector **[2]**
- TB1: Screw terminal for an external 12VDC PSU **[3]**
- CN12: Standard 2.5mm pitch XH battery connector **[4]**

2.3.1 USB-C connector

The USB-C connector [labeled as CN9] provides power from the USB host [typically PC], USB power bank, or USB wall adapter. When powered over the USB connector, the available power will depend on the source capabilities.

Maximum power ratings, along with the allowed input voltage range in the case when the USB power supply is used, are given in the table *Figure 5*:

USB Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.8	5.94
4.4	5.5	5	1.4	7
		3.3 & 5	0.8 & 0.8	6.64

Figure 5: USB power supply table

When using a PC as the power source, the maximum power can be obtained if the host PC supports the USB 3.2 interface, and is equipped with USB-C connectors. If the host PC uses the USB 2.0 interface, it will be able to provide the least power, since only up to 500 mA [2.5W at 5V] is available in that case. Note that when using longer USB cables or USB cables of low quality, the voltage may drop outside the rated operating voltage range, causing unpredictable behavior of the development board.

NOTE *If the USB host is not equipped with the USB-C connector, a Type A to Type C USB adapter may be used [included in the package].*

2.3.2 12VDC barrel-type connector and screw terminal

An external 12V power supply can be connected over the 12VDC barrel connector [labeled as CN11] or over the 2-pole screw terminal [labeled

as TB1]. When using an external power supply, it is possible to obtain an optimal amount of power, since one external power supply unit can be easily exchanged with another, while its power and operating characteristics can be decided per application. The development board allows a current of 2.8A per power rail [3.3V and 5V] when using an external 12V power supply. The barrel-type connector is useful for connecting wall-adapters, while the screw terminal is a good choice when there is no connector installed at the end of the PSU cable.

12V barrel-type connector and screw terminal should not be used simultaneously by two different power supplies, as the connectors are routed in parallel. **NOTE**

Maximum power ratings, along with the allowed input voltage range in the case when the external power supply is used, are given in the table *Figure 6*:

External Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	2.8	9.24
10.6	14	5	2.8	14
		3.3 & 5	2.8 & 2.8	23.24

Figure 6: External power supply table

When connecting an external power supply over the barrel connector, make sure that the polarity of the barrel connector is matched with the 12VDC connector on the development board, according to the image printed on the front side, above the connector itself. **NOTE**

2.3.3 Li-Po/Li-Ion XH battery connector

When powered by a single-cell Li-Po/Li-Ion battery, mikromedia 7 offers an option to be operated remotely. This allows complete autonomy, allowing it to be used in some very specific situations: hazardous environments, agricultural applications, etc.

The battery connector is a standard 2.5mm pitch XH connector. It allows a range of single-cell Li-Po and Li-Ion batteries to be used. The PSU of mikromedia 7 offers the battery charging functionality, from both the USB connector and the 12VDC/external power supply. The battery charging circuitry of the PSU manages the battery charging process, allowing the optimal charging conditions and longer battery life. The charging process is indicated by BATT indicator, located on the back of mikromedia 7.

The PSU module also includes the battery charger circuit. Depending on the operational status of the mikromedia 7 development board, the charging current can be either set to 100mA or 500mA. When the development board is powered OFF, the charger IC will allocate all available power for the battery charging purpose. This results in faster charging, with the charging current set to approximately 500mA. While powered ON, the available charging current will be set to approximately 100 mA, reducing the overall power consumption to a reasonable level.

NOTE Using low-quality USB hubs, and too long or low-quality USB cables, may cause a significant USB voltage drop, which can obstruct the battery charging process.


Maximum power ratings along with the allowed input voltage range when the battery power supply is used, are given in the table *Figure 7*:

Battery Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.6	5.28
3.5	4.2	5	1.2	6
		3.3 & 5	0.7 & 0.7	5.81

Figure 7: Battery power supply table

2.4 Power redundancy and uninterrupted power supply (UPS)

The PSU module supports power supply redundancy: it will automatically switch to the most appropriate power source if one of the power sources fails or becomes disconnected. The power supply redundancy also allows for an uninterrupted operation [i.e. UPS functionality, the battery will still provide power if the USB cable is removed, without resetting mikromedia 7 during the transition period].

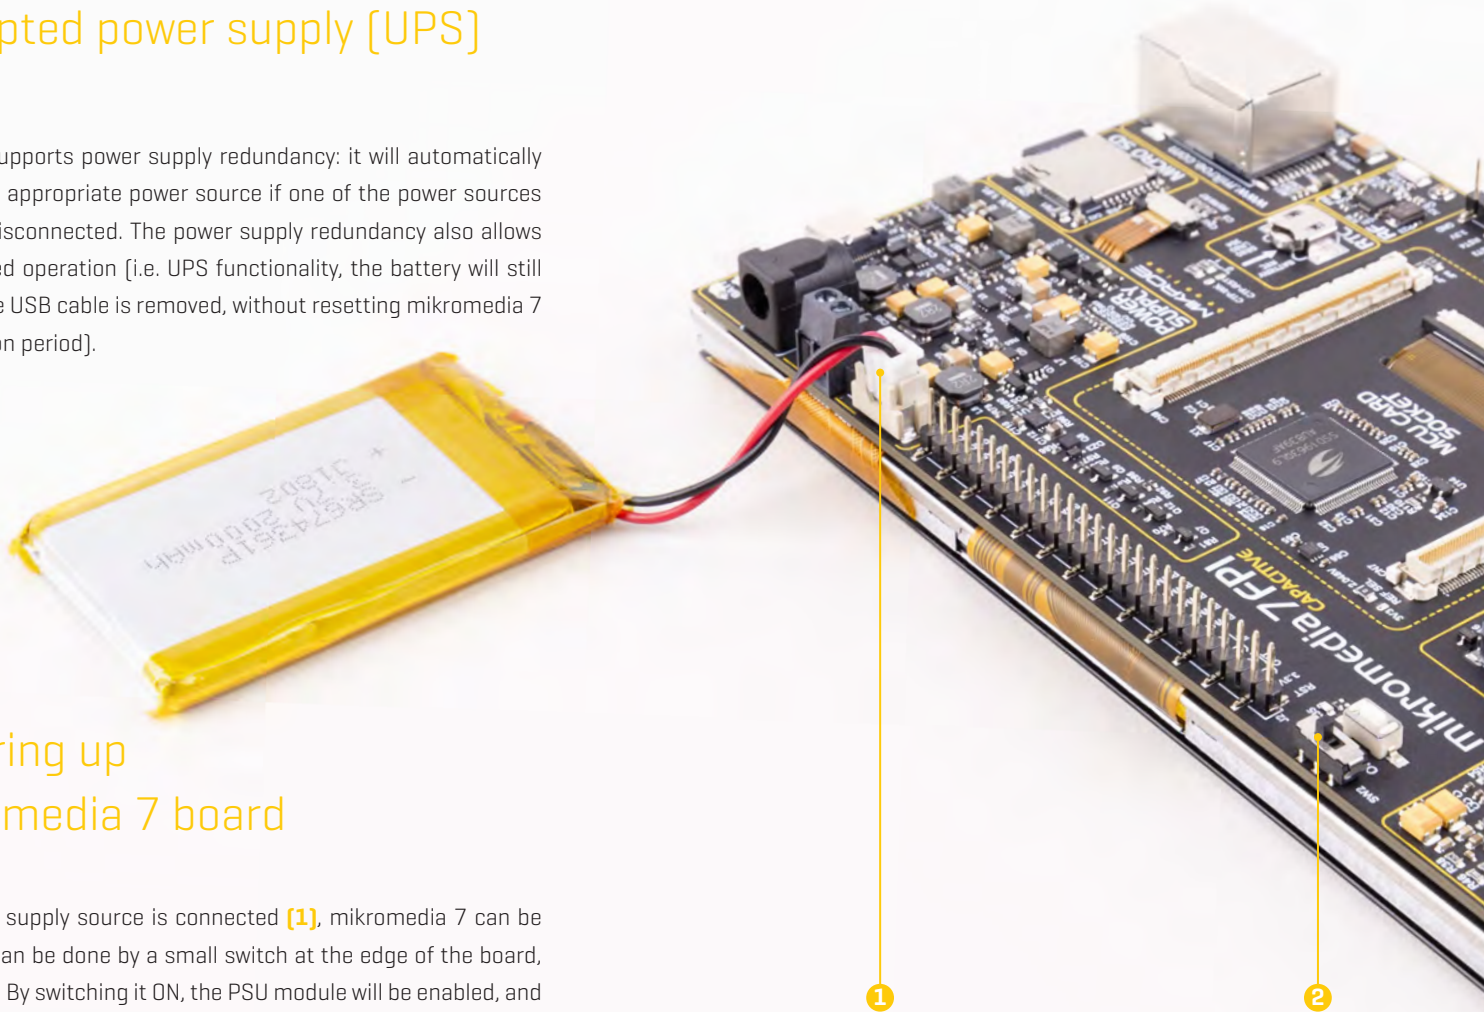

2.5 Powering up the mikromedia 7 board

After a valid power supply source is connected **[1]**, mikromedia 7 can be powered ON. This can be done by a small switch at the edge of the board, labeled as SW2 **[2]**. By switching it ON, the PSU module will be enabled, and the power will be distributed throughout the board. A LED indicator labeled as PWR indicates that the mikromedia 7 is powered ON.

Figure 8: Battery power supply connection view

3. Capacitive display

A high-quality 7” TFT true-color display with a capacitive touch panel is the most distinctive feature of the mikromedia 7. The display has a resolution of 800 by 480 pixels, and it can display a true-color palette of 16.7M of colors [24-bit color depth]. The display of mikromedia 7 features a reasonably high contrast ratio of 500:1, and brightness intensity of 420 Cd/m², thanks to a matrix of 9 x 3 high-brightness LEDs [27 in total] that are used for backlighting.

The display module is controlled by the SSD1963 graphics driver IC from Solomon Systech [1]. This is a powerful graphics coprocessor, equipped with 1215KB of frame buffer memory. It also includes some advanced features such as the hardware accelerated display rotation, display mirroring, hardware windowing, dynamic backlight control, programmable color and brightness control, and more.

The capacitive multi-touch panel based on the FT5426 CTP controller, allows the development of interactive applications, offering a touch-driven control interface. The touch panel controller uses the I2C interface for the communication with

the host MCU. This advanced multi-touch panel controller supports gestures, including zoom and swipe in all four directions.

Equipped with high-quality 7” display [2] and the multi-touch controller that supports gestures, mikromedia 7 represents a very powerful hardware environment for building various GUI-centric Human Machine Interface [HMI] applications.



Figure 9: Display and TFT section view

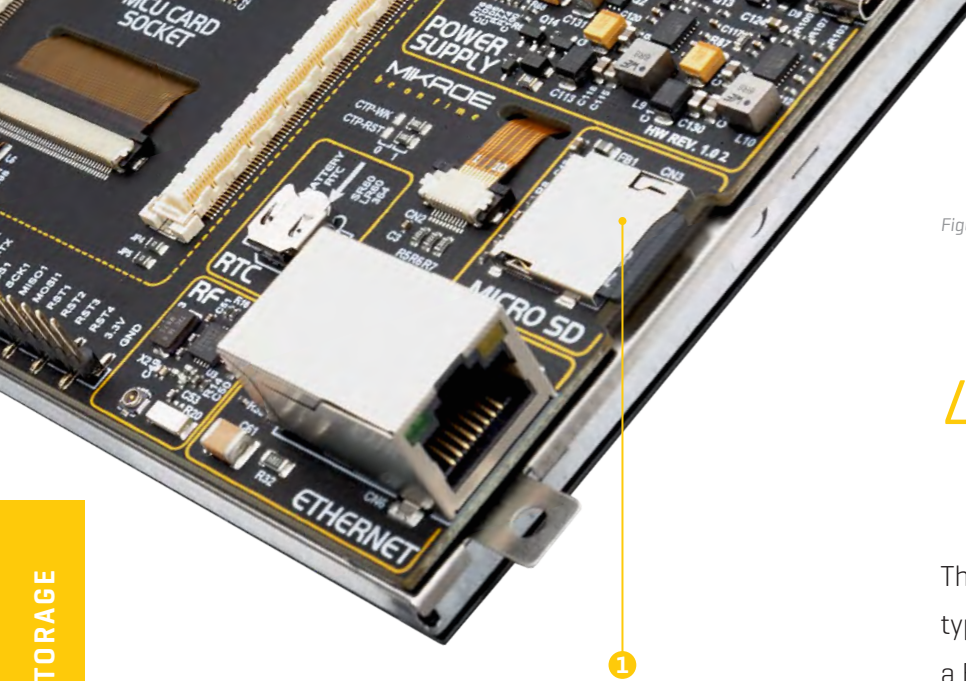


Figure 10: microSD card slot view

4. Data storage

The mikromedia 7 development board is equipped with two types of external memory: with a microSD card slot, and with a Flash memory module.

4.1 microSD card slot

The microSD card slot **[1]** allows storing large amounts of data externally, on a microSD memory card. It uses the Serial Peripheral Interface [SPI] for communication with the MCU. The microSD card detection circuit is also provided on the board. The microSD card is the smallest SD Card version, measuring only 5 x 11 mm. Despite its small size, it allows tremendous amounts of data to be stored on it. In order to read and write to the SD Card, a proper software/firmware running on the host MCU is required.

4.2 External flash storage

mikromedia 7 is equipped with the SST26VF064B Flash module **[2]**. The Flash memory module has a density of 64 Mbits. Its storage cells are arranged in 8-bit words, resulting in 8Mb of non-volatile memory in total, available for various applications. The most distinctive features of the SST26VF064B Flash module are its high speed, very high endurance, and very good data retention period. It can withstand up to 100,000 cycles, and it can preserve the stored information for more than 100 years. It also uses the SPI interface for communication with the host MCU.

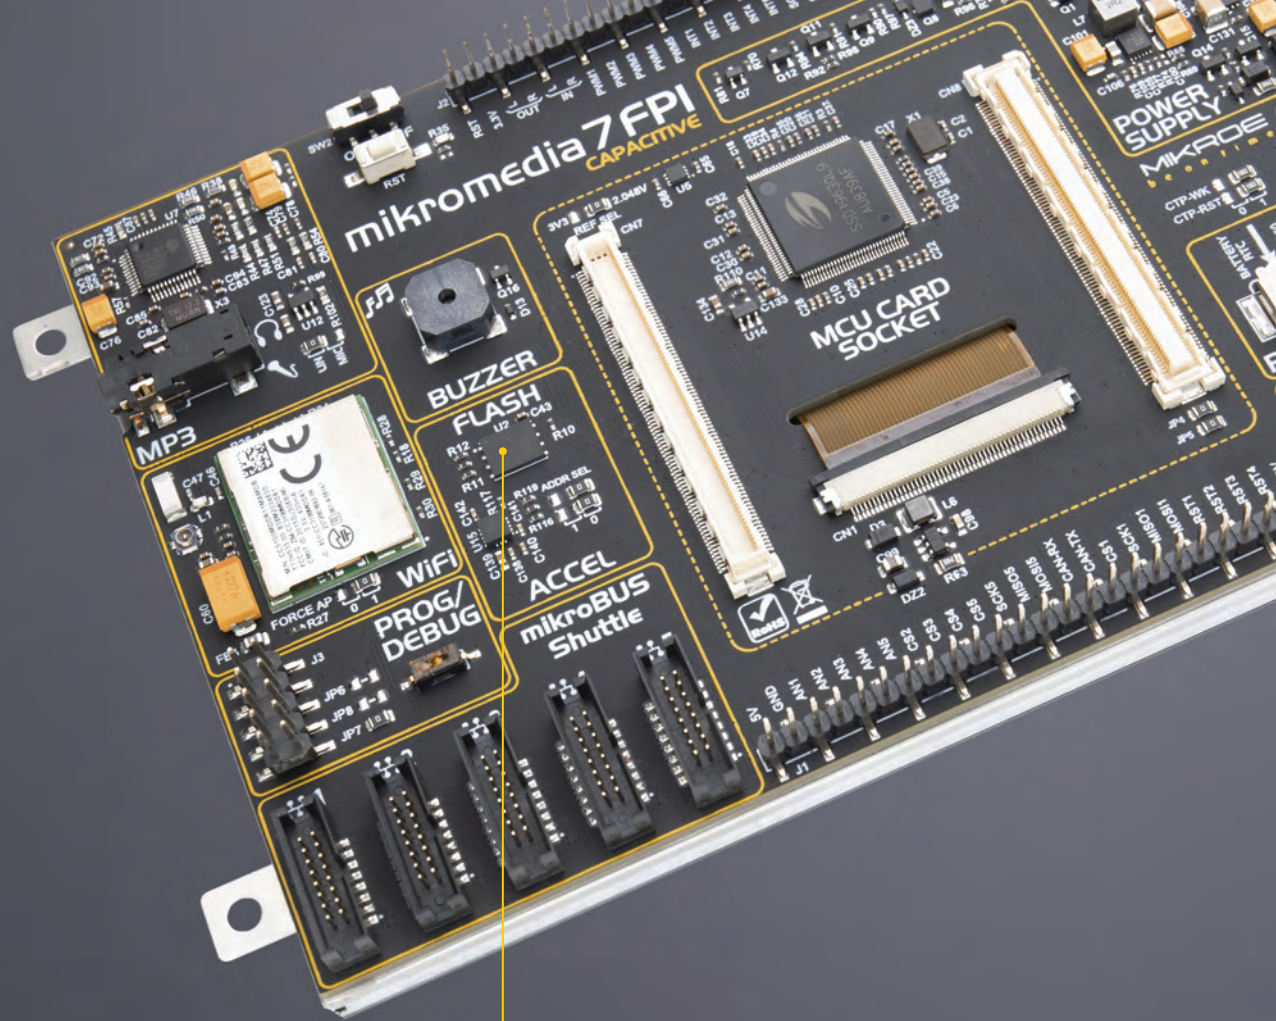
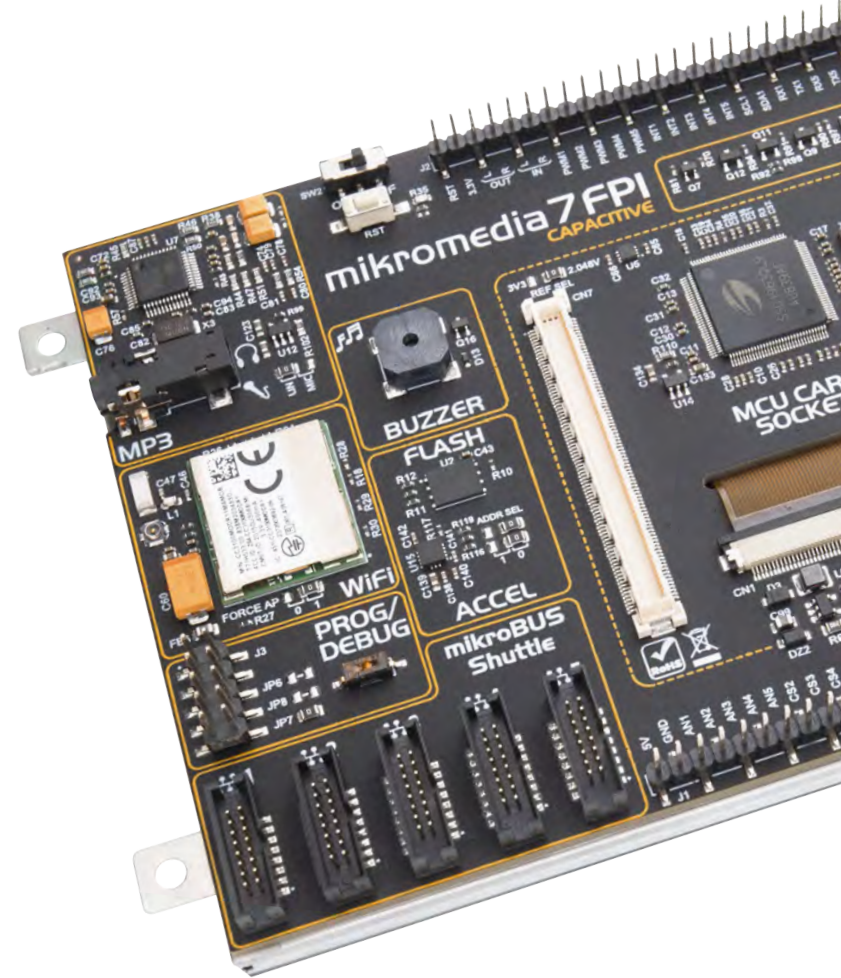


Figure 11: Flash memory view

2

5. Connectivity

mikromedia 7 offers a huge number of connectivity options including USB (HOST/DEVICE), Ethernet, RF and WiFi. The mikromedia 7 development board also offers two 1x26 pin headers, which are used to directly access the host MCU pins. Superior connectivity features of the mikromedia 7 development system are rounded up with five standardized mikroBUS™ Shuttle connectors. It is a considerable upgrade for the system, as it allows interfacing with the huge base of Click boards™.



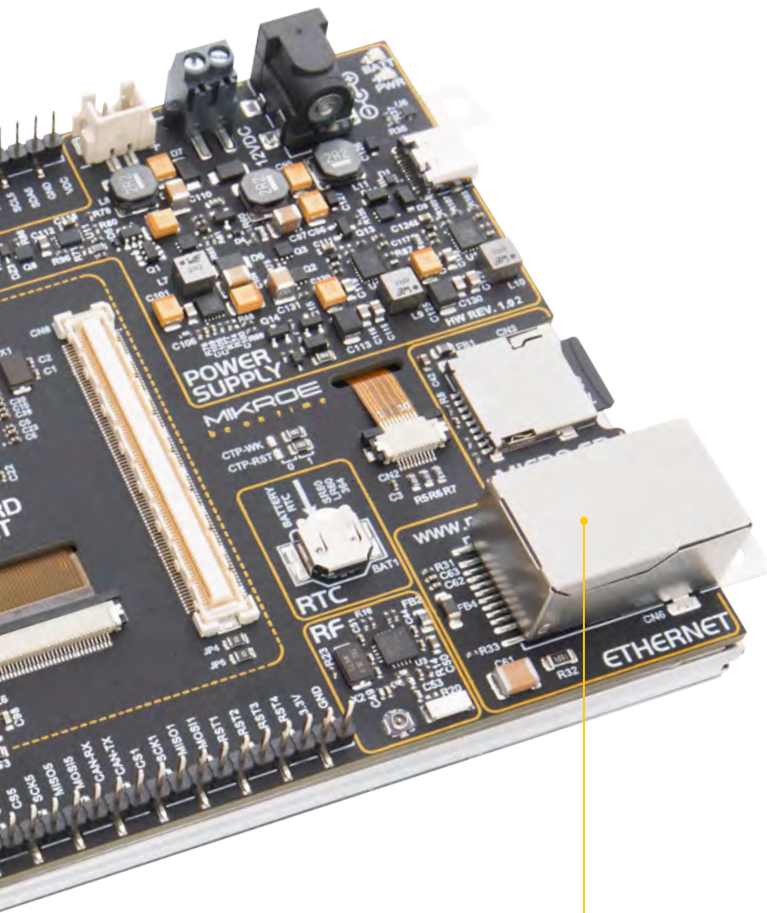


Figure 12: RJ-45 connector view

5.1 Ethernet

Ethernet is a popular computer networking technology for local area networks [LAN]. Systems communicating over Ethernet divide a stream of data into individual packets, known as frames. Each frame contains source and destination addresses and error-checking data so that damaged data can be detected and re-transmitted. This makes the Ethernet protocol very popular for communication over longer distances or in noisy environments.

Some MCUs feature an integrated Ethernet peripheral module, which contains the entire communication stack on the chip. MCU Cards equipped with such MCUs, are already provided with the Ethernet physical layer transceiver IC [PHY IC]. This allows the Ethernet circuit of the mikromedia 7 development board to be reduced only to isolation transformers/chokes, a pack of TVS diodes for electrostatic discharge [ESD] protection, and an RJ-45 connector **[1]**, allowing the development board to be safely and reliably connected to the Ethernet network.

5.2 WiFi

A very popular WiFi module **[1]** labeled as CC3100 allows WiFi connectivity. This module is the complete WiFi solution on a chip: it is a powerful WiFi network processor with the power management subsystem, offering the TCP/IP stack, powerful crypto engine with 256-bit AES support, WPA2 security, SmartConfig™ technology, and much more.

By offloading the WiFi and Internet handling tasks from the MCU, it allows the host MCU to process more demanding graphical applications, thus making it an ideal solution for adding WiFi connectivity to mikromedia 7. It uses the SPI interface to communicate with the host MCU, along with several additional GPIO pins used for the reset, hibernation, and for the interrupt reporting.

An SMD jumper labeled as FORCE AP **[2]** is used to force the CC3100 module into an Access Point (AP) mode, or into a Station mode. However, the operating mode of the CC3100 module can be overridden by the software. This SMD jumper offers two choices:

- 0:** the FORCE AP pin is pulled to a LOW logic level, forcing the CC3100 module into the STATION mode
- 1:** the FORCE AP pin is pulled to a HIGH logic level, forcing the CC3100 module into the AP mode

There is a chip antenna **[3]** integrated on the PCB of the mikromedia 7, as well as SMA connector for external WiFi antenna.


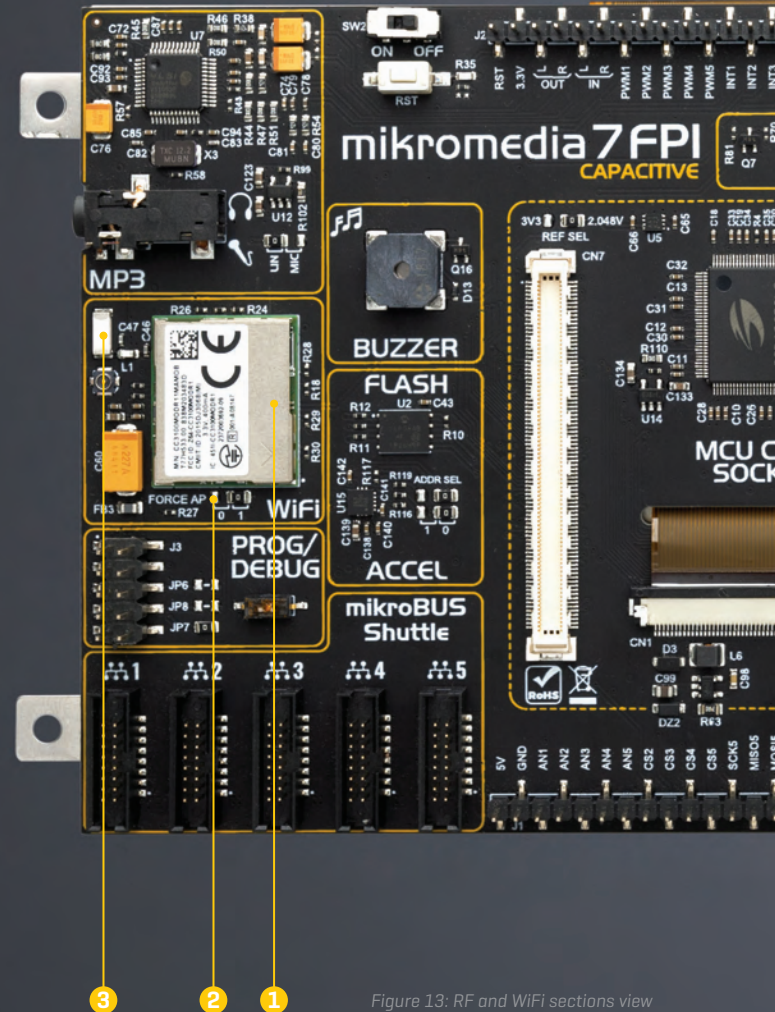


Figure 13: RF and WiFi sections view

5.3 RF

mikromedia 7 offers communication over the world-wide ISM radio frequency (RF) band. The ISM band covers a frequency range between 2.4GHz and 2.4835GHz. This RF band is reserved for industrial, scientific, and medical use [hence the ISM abbreviation]. In addition, it is globally available, making it a perfect alternative to WiFi, when the M2M communication over a short distance is required.

mikromedia 7 uses the **nRF24L01+** [4], a single-chip 2.4GHz transceiver with an embedded baseband protocol engine, produced by Nordic Semiconductors. It is a perfect solution for ultra-low power wireless applications. This transceiver relies on the GFSK modulation, allowing data rates in the range from 250 kbps, up to 2 Mbps. The GFSK modulation is the most efficient RF signal modulation scheme, reducing the required bandwidth, thus being more efficient. The nRF24L01+ also features the proprietary **Enhanced ShockBurst™**, a packet-based data link layer. Besides other functionalities, it offers a 6-channel **MultiCeiver™** feature, which allows using the nRF24L01+ in a star network topology. The nRF24L01+ uses the SPI interface to communicate with the host MCU. Besides the SPI lines, it uses additional GPIO pins for the SPI Chip Select, Chip Enable, and for the interrupt. The RF section of the mikromedia 7 also features a small chip antenna [5], as well as SMA connector for external antenna.

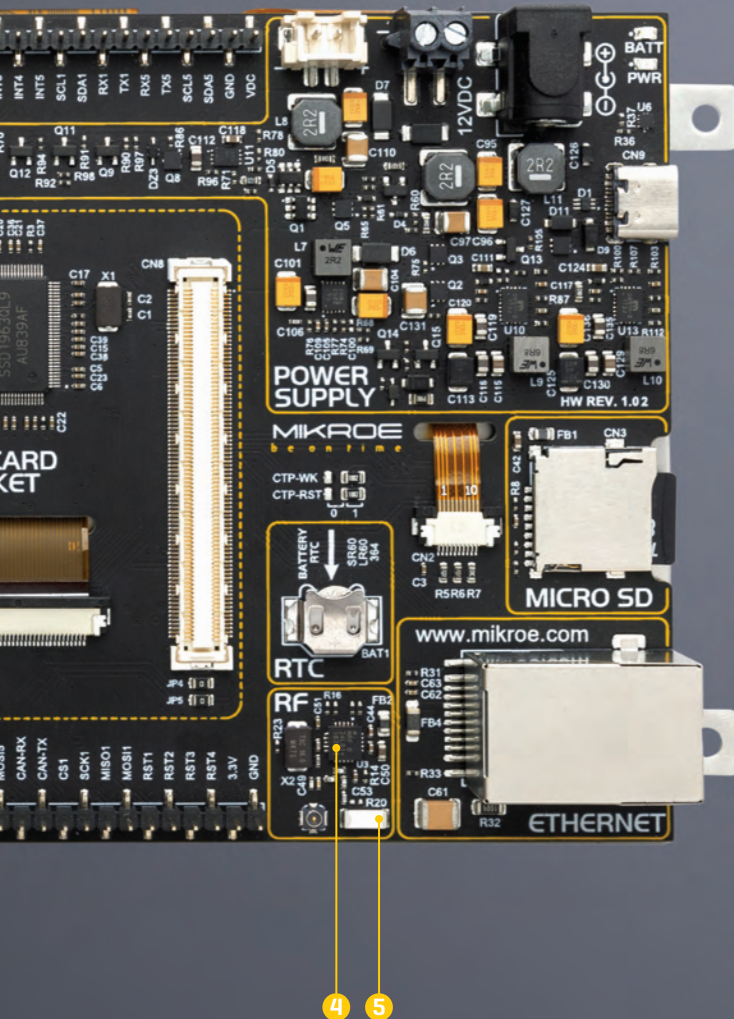

5.4 USB

The host MCU is equipped with the USB peripheral module, allowing simple USB connectivity. USB (Universal Serial Bus) is a very popular industry standard that defines cables, connectors, and protocols used for communication and power supply between computers and other devices. Mikromedia 7 supports USB as HOST and USB as DEVICE, allowing the development of a wide range of various USB-based applications. It is equipped with the USB-C connector [1], which offers many advantages, compared to earlier types of USB connectors (symmetrical design, higher current rating, compact size, etc).

The USB mode selection is done using a monolithic controller IC. This IC provides Configuration Channel (CC) detection and indication functions. To set up mikromedia 7 as a USB HOST, the USB PSW pin should be set to a LOW logic level [0] by the host MCU. If set to a HIGH logic level [1], mikromedia 7 acts as a DEVICE. While in HOST mode, mikromedia 7 provides power over the USB-C connector. The USB PSW pin is driven by the host MCU, allowing the software to control the USB mode.

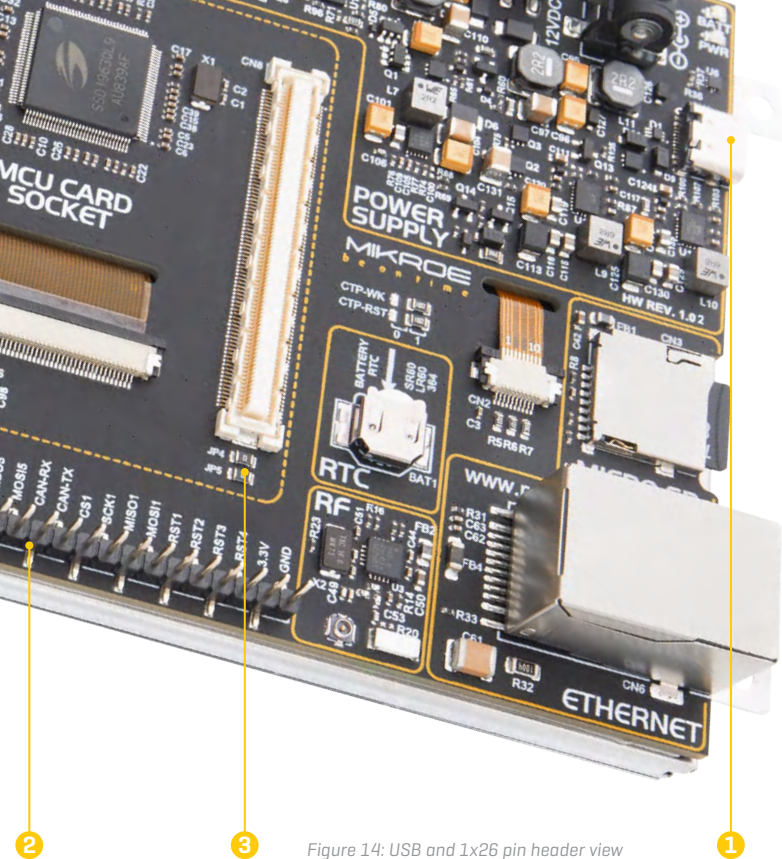


Figure 14: USB and 1x26 pin header view

The USB ID pin is used to detect the type of the device attached to the USB port, according to the USB OTG specifications: the USB ID pin connected to GND indicates a HOST device, while the USB ID pin set to a high impedance state (HI-Z) indicates that the connected peripheral is a DEVICE.

When mikromedia 7 is working in USB HOST mode, it must not be mounted to another USB HOST (such as PC).

NOTE

5.5 CAN

Although not included on the mikromedia 7 development board, CAN bus connectivity can be added as a bonus feature, if the MCU on the installed MCU Card supports it. Similarly to Ethernet, components related to the CAN communication (i.e. CAN transceiver IC) are already included on such MCU Card, along with a small 2-pole screw connector. This allows mikromedia 7 to be used for the CAN communication without any additional hardware modifications required.

Besides the CAN circuit on the MCU Card itself, CAN communication lines are routed to the 1x26 pin header, allowing them to be used with an external CAN transceiver. There are two SMD jumpers near this header [JP4 and JP5] [3], which allow restricting these lines to the MCU Card only. If these SMD jumpers are populated, CAN RX and CAN TX lines of the host MCU will also become available over the 1x26 pin header. The jumpers are populated by default.

Once the external CAN transceiver is connected to CAN-RX and CAN-TX on the 1x26 pin header, CAN jumpers on MCU Card have to be removed (for details check the schematic of the used MCU Card). Similarly, if the CAN transceiver on the MCU Card is to be used, JP4 and JP5 on the mikromedia 7 have to be removed if external CAN transceiver is connected to CAN-RX and CAN-TX pins on the 1x26 pin header. If there is no external CAN transceiver connected to pin header then CAN transceiver on the MCU Card can be used without removing JP4 and JP5.

NOTE CAN transceiver can not be used at the same time on the MCU card and on the 1x26 pin headers.

5.6 1x26 pin headers

Most of the host MCU pins are routed to two 1x26 pin headers [2], making them available for further connectivity. In addition to MCU pins, some additional peripheral pins are also routed to this header. These headers provide the opportunity to add various external devices and peripherals to mikromedia 7 development board.

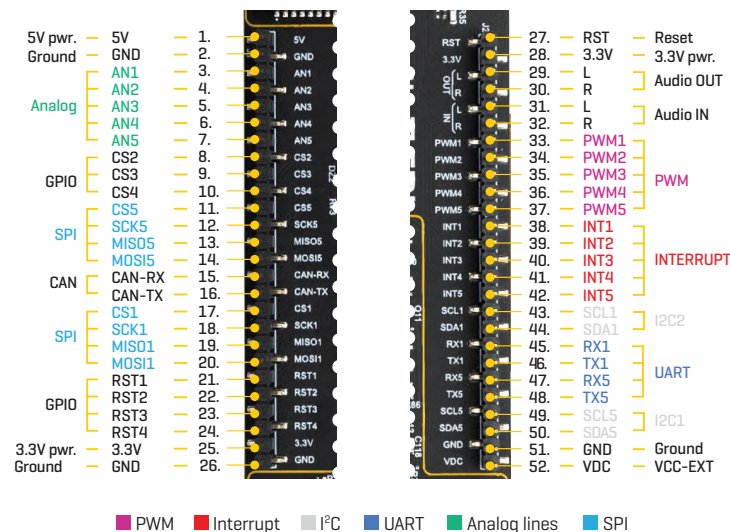


Figure 15: 1x26 pin header view


5.7 mikroBUS™ shuttle connector

Mikromedia 7 development board uses the mikroBUS™ Shuttle connector, a brand new addition to the mikroBUS™ standard in the form of a 2x8 pin IDC header with 1.27mm (50mil) pitch. Unlike mikroBUS™ sockets, mikroBUS™ Shuttle connectors take up much less space, allowing them to be used in cases where more compact design is required. There are five mikroBUS™ Shuttle connectors [1] on the development board, labeled from MB1 to MB5.

Typically, a mikroBUS™ Shuttle connector can be used in combination with mikroBUS™ Shuttle extension board but is not limited to it.

mikroBUS™ Shuttle extension board [2] is an add-on board equipped with the conventional mikroBUS™ socket and four mounting holes. It can be connected to the mikroBUS™ Shuttle connector by a flat cable. This ensures compatibility with the huge base of Click boards™. Using mikroBUS™ Shuttles also provides a number of additional benefits:

- When using flat cables, the position of mikroBUS™ Shuttle is not fixed
- mikroBUS™ Shuttle extension boards contain additional mounting holes for permanent installation
- An arbitrary length of flat cables may be used (depending on the particular use cases)
- Connectivity can be additionally expanded, by cascading these connectors using Shuttle click [3]

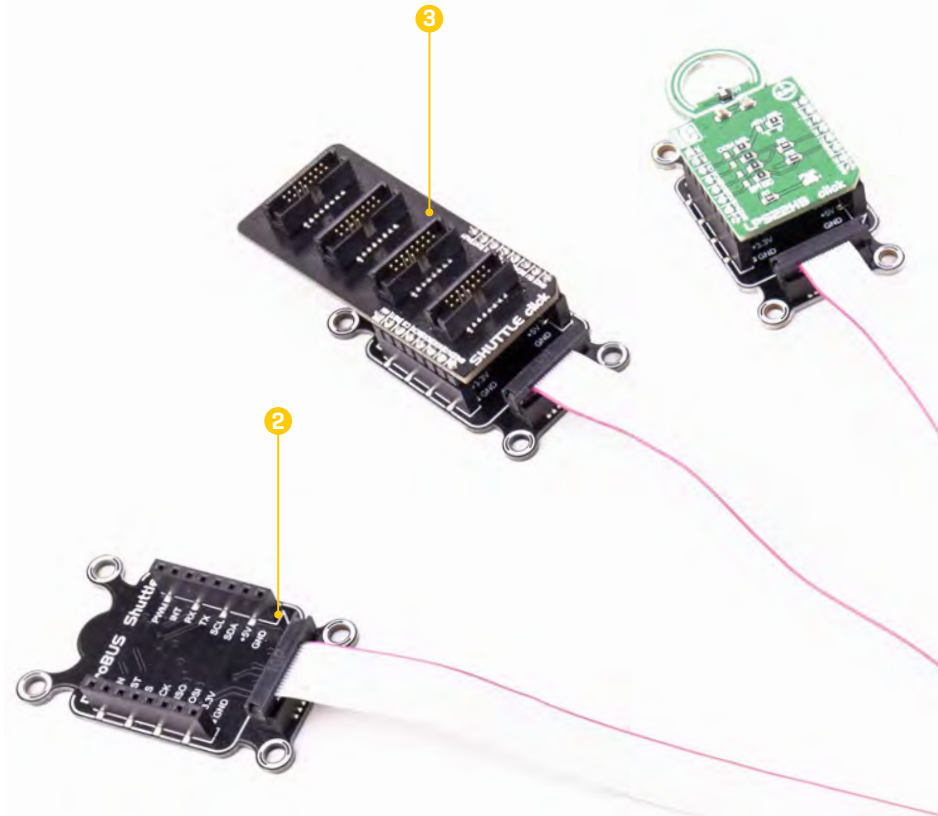

For more information about mikroBUS™ Shuttle extension board and Shuttle click, please visit web pages:

www.mikroe.com/mikrobus-shuttle

www.mikroe.com/shuttle-click

For additional information about the mikroBUS™, please visit the official web page at www.mikroe.com/mikrobus

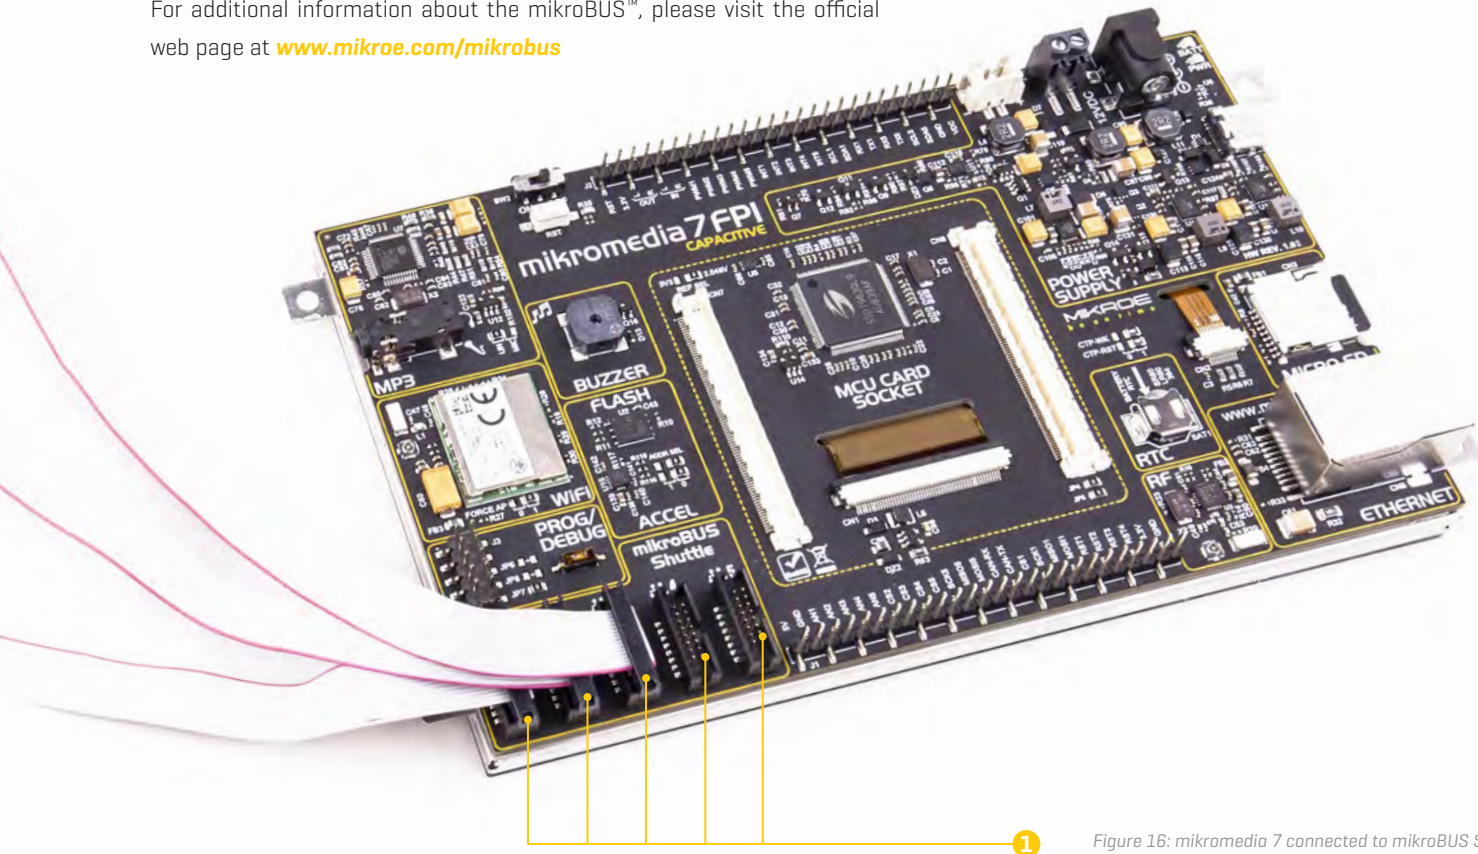


Figure 16: mikromedia 7 connected to mikroBUS Shuttle view

6. Sound-related peripherals

By offering a pair of sound-related peripherals, mikromedia 7 rounds-up its multimedia concept. It features a piezo-buzzer, which is extremely easy to program but can produce only the simplest sounds, useful only for alarms or notifications. The second audio option is the powerful VS1053B IC. It is an Ogg Vorbis/MP3/AAC/WMA/FLAC/WAV/MIDI audio decoder, and a PCM/IMA ADPCM/Ogg Vorbis encoder, both on a single chip. It features a powerful DSP core, high-quality A/D and D/A converters, stereo headphones driver capable of driving a 30Ω load, zero-cross detection with the smooth volume change, bass and treble controls, and much more.

6.1 Piezo buzzer

A piezo buzzer [1] is a simple device capable of reproducing sound. It is driven by a small pre-biased transistor. The buzzer can be driven by applying a PWM signal from the MCU at the base of the transistor: the pitch of the sound depends on the frequency of the PWM signal, while the volume can be controlled by changing its duty cycle. Since it is very easy to program, it can be very useful for simple alarms, notifications, and other types of simple sound signalization.


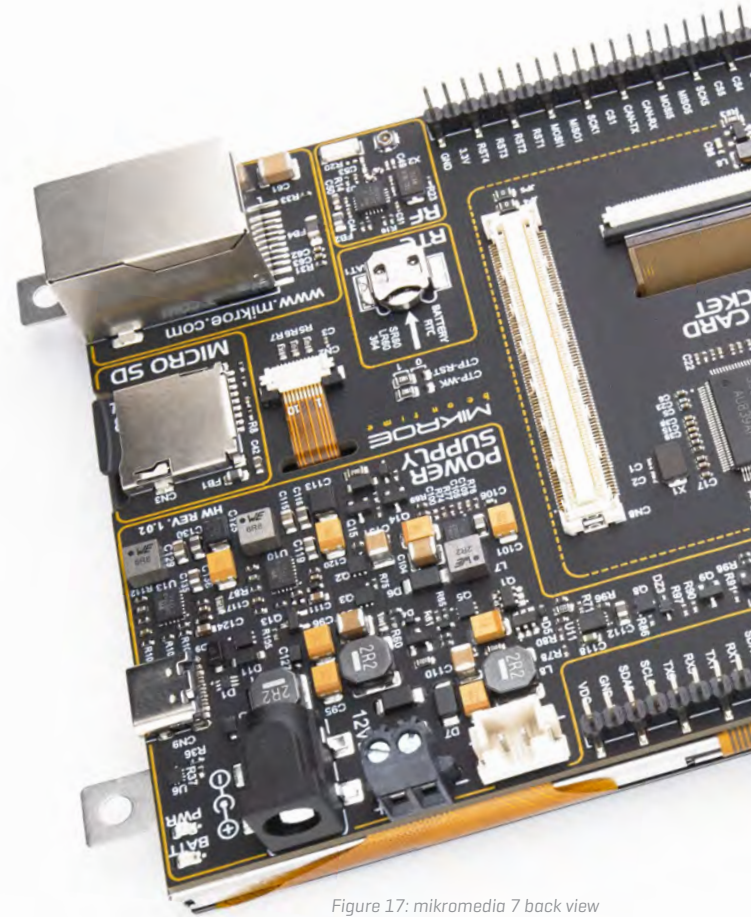


Figure 17: mikromedia 7 back view

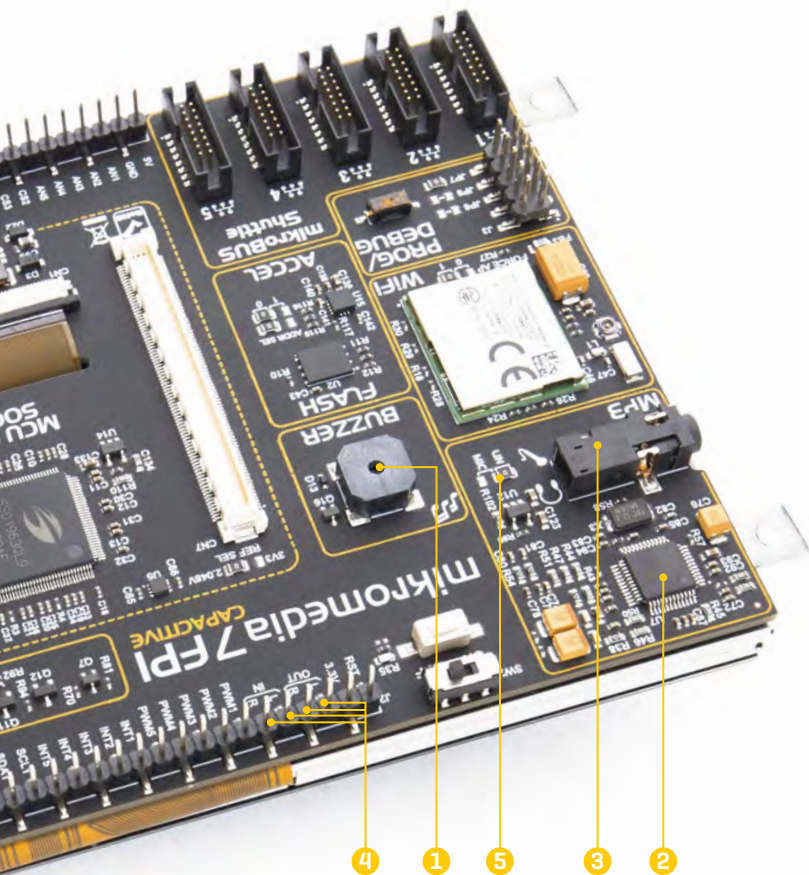

6.2 Audio CODEC

Resource-demanding and complex audio processing tasks can be offloaded from the host MCU by utilizing a dedicated audio CODEC IC, labeled as VS1053B [2]. This IC supports many different audio formats, commonly found on various digital audio devices. It can encode and

decode audio streams independently while performing DSP-related tasks in parallel. The VS1053B has several key features that make this IC very popular choice when it comes to audio processing.

By offering high-quality hardware compression (encoding), the VS1053B allows the audio to be recorded taking up much less space compared to the same audio information in its raw format. In combination with high quality ADCs and DACs, headphones driver, integrated audio equalizer, volume control, and more, it represents an all-around solution for any type of audio application. Along with the powerful graphics processor, the VS1053B audio processor completely rounds-up the multimedia aspects of the mikromedia 7 development board.

6.3 Audio connectors

The mikromedia 7 board is equipped with the 3.5mm four-pole headphones jack [3], allowing to connect a headset with a microphone. Two line-level audio outputs are also available over the 1x26 pin header [4].

The microphone input from the 3.5mm four-pole headset jack is multiplexed with two line-level audio inputs. By using an SMD jumper [5] located in the MP3 section, near the headphone jack, it is possible to select which audio input will be used by the VS1053B. The choices are:

- LIN:** two line-level inputs form the 1x26 pin header
- MIC:** electret microphone, connected over the 3.5mm headphone jack

7. Sensors and other peripherals

A set of additional sensors and devices adds yet another layer of usability to the mikromedia 7 development board.

7.1 Digital motion sensor

The FXOS8700CQ, an advanced integrated 3-axis accelerometer and 3-axis magnetometer can detect many different motion-related events, including the orientation event detection, freefall detection, shock detection, as well as tap, and double-tap event detection. These events can be reported to the host MCU over two dedicated interrupt pins, while the data transfer is performed over the I2C communication interface. The FXOS8700CQ sensor **(1)** can be very useful for display orientation detection. It can also be used to turn mikromedia 7 into a complete 6-axis e-compass solution. The I2C slave address can be changed by using two SMD jumpers grouped under the ADDR SEL label, located in the ACCEL section of the board.


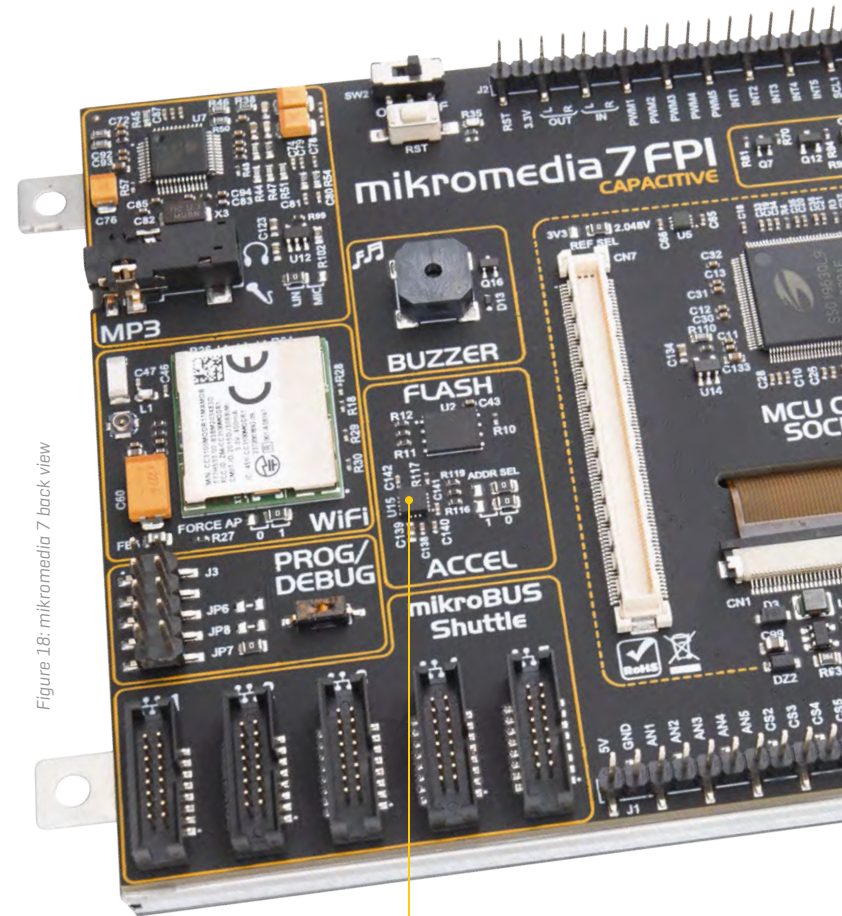


Figure 18: mikromedia 7 back view




7.2 Real-time clock (RTC)

The host MCU contains a real-time clock peripheral module (RTC) **(2)**. The RTC peripheral uses a separate power supply source, typically a battery. To allow continuous tracking of time, mikromedia 7 is equipped with a button cell battery that maintains RTC functionality even if the main power supply is OFF. Extremely low power consumption of the RTC peripheral allows these batteries to last very long. The mikromedia 7 development board is equipped with the button cell battery holder, compatible with the SR60, LR60, 364 button cell battery types, allowing it to include a real time clock within the applications.

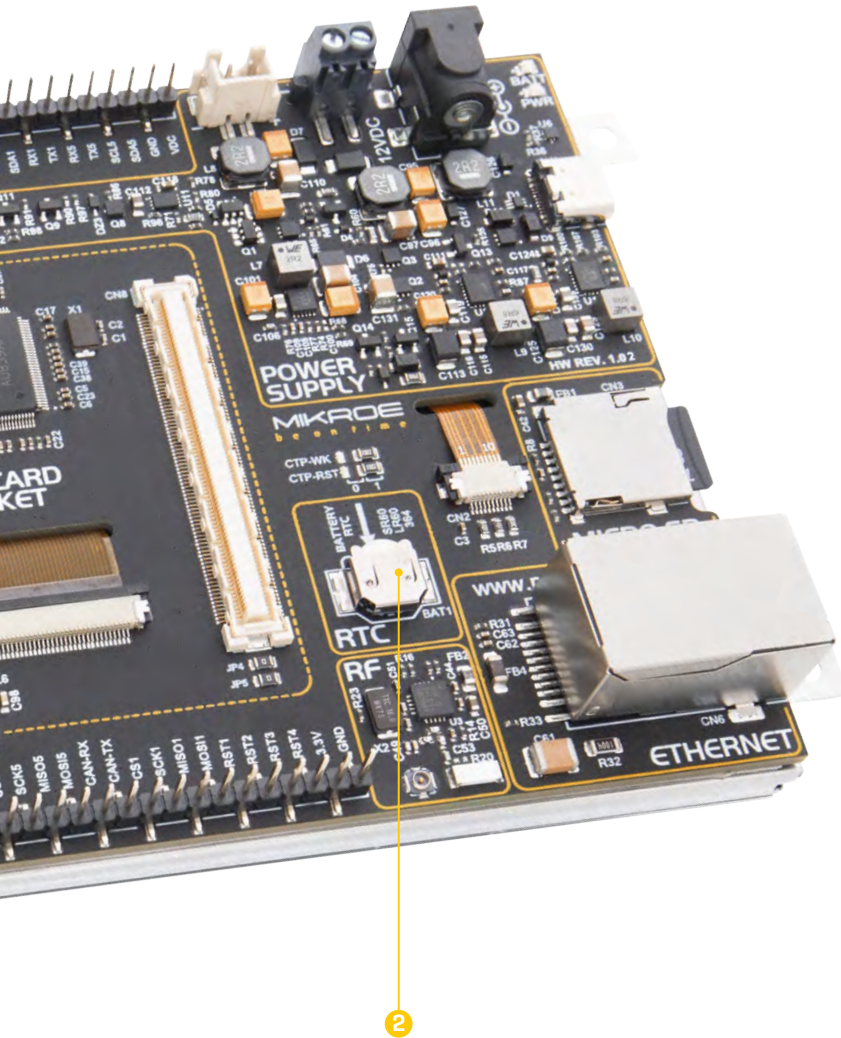

RAPID
DEVELOPMENT
OF MULTIMEDIA
AND GUI-CENTRIC
APPLICATIONS





What makes you want to be an embedded developer? Is it the recognition of your skills, invention, or the development process? Whatever the reason is, we want to let you know that we are here for you every step of the way.

You can enjoy the process focused, yet relaxed – everything else is taken care of.

Enjoy premium.



What's next?

You have now completed the journey through each and every feature of mikromedia 7 CAPACITIVE FPI development board. You got to know its modules and organization. Now you are ready to start using your new board. We are suggesting several steps which are probably the best way to begin.

1 COMPILERS

Easy programming, clean interface, powerful debugging, great support - our compilers come in three different flavors: mikroC PRO, mikroBASIC PRO and mikroPASCAL PRO for various architectures offering a complete rapid embedded development solution for these 3 major programming languages.

www.mikroe.com/compilers

2 PROJECTS

Once you have chosen your compiler, and since you already got the board, you are ready to start writing your first projects. We have equipped our compilers with dozens of examples that demonstrate the use of each and every feature of the mikromedia 7 CAPACITIVE FPI development board. This makes an excellent starting point for future custom projects. Just load the example, read well commented code, and see how it works on hardware.

3 COMMUNITY

We invite you to join thousands of users of Mikroe development tools. You will find useful projects and tutorials and get help from a large user community. If you want to download free projects and libraries, or share your own code, please visit the Libstock website. With user profiles, you can get to know other programmers, and subscribe to receive notifications on their code.

www.libstock.mikroe.com

4 SUPPORT

Mikroe offers free Tech Support to the end of its life span, so if anything goes wrong, we are ready and willing to help. We know how important it is to be able to rely on someone in the moments when we are stuck with our projects for any reason, or facing a deadline. This is why our Support Department, as one of the pillars upon which our company is based, now also offers the Premium Technical Support to business users, ensuring even shorter time-frame for solutions. www.mikroe.com/support

DISCLAIMER

All the products owned by MikroElektronika are protected by copyright law and international copyright treaty. Therefore, this manual is to be treated as any other copyright material. No part of this manual, including product and software described herein, must be reproduced, stored in a retrieval system, translated or transmitted in any form or by any means, without the prior written permission of MikroElektronika. The manual PDF edition can be printed for private or local use, but not for distribution. Any modification of this manual is prohibited.

MikroElektronika provides this manual 'as is' without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties or conditions of merchantability or fitness for a particular purpose.

MikroElektronika shall assume no responsibility or liability for any errors, omissions and inaccuracies that may appear in this manual. In no event shall MikroElektronika, its directors, officers, employees or distributors be liable for any indirect, specific, incidental or consequential damages [including damages for loss of business profits and business information, business interruption or any other pecuniary loss] arising out of the use of this manual or product, even if MikroElektronika has been advised of the possibility of such damages. MikroElektronika reserves the right to change information contained in this manual at any time without prior notice, if necessary.

HIGH RISK ACTIVITIES

The products of MikroElektronika are not fault – tolerant nor designed, manufactured or intended for use or resale as on – line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of Software could lead directly to death, personal injury or severe physical or environmental damage ['High Risk Activities']. MikroElektronika and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

TRADEMARKS

The MikroElektronika name and logo, the MikroElektronika logo, mikroC, mikroBasic, mikroPascal, mikroProg, mikromedia, Fusion, Click boards™ and mikroBUS™ are trademarks of MikroElektronika. All other trademarks mentioned herein are property of their respective companies.

All other product and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are only used for identification or explanation and to the owners' benefit, with no intent to infringe.

Copyright © MikroElektronika, 2019, All Rights Reserved.

MIKROE

Time-saving embedded tools

If you want to learn more about our products, please visit our website at www.mikroe.com

If you are experiencing some problems with any of our products or just need additional information, please place your ticket at www.mikroe.com/support

If you have any questions, comments or business proposals, do not hesitate to contact us at office@mikroe.com

