
T	G	т	m	D	0





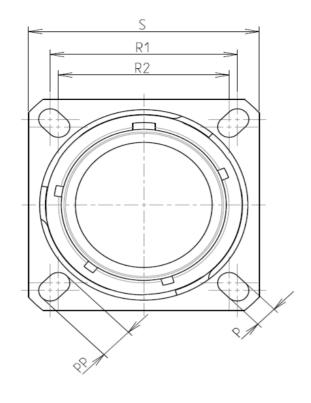

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			
-Salt Spray	: 500 hours			

: 11.73 g ± 10%

8D 0

G

11

W

98

Ρ


F

Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

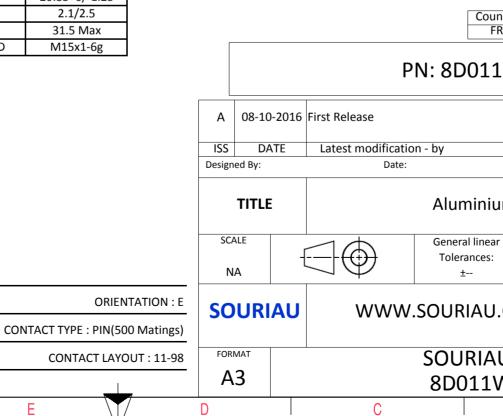

σ					
			4		
AS EXAMPLE			3		
any non-conformination which does not cover of the Parties or Indation, technical number of statements of the Parties of IW98PE	mply with by a third party		2		
		MOD N°			
	CUSTOMER DRAWING				
um Receptac	n Receptacle 8D series				
ar	NPRDS / PROJECT 859		1		
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°		SHEET			
W98PE-C B	A	1/2			

		۵	ال (m	D	0	
		Contact Layout				f	Panel Cutou
4	-×($ \begin{array}{c} & & & \\ & A \\ & \oplus \\ & & \oplus \\ & & \oplus \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Com posit IL A B C C D E E F Shell Arrangement Numb size no. vont	x +.000 (0.00) +.130 (3.30) 3 +.130 (3.30) +.000 (0.00) 2 +.065 (1.65) 113 (2.87) 0 065 (1.65) 113 (2.87) 2 +.050 (0.00) +.000 (0.00) = 130 (3.30) +.000 (0.00) = +.000 (0.00) +.000 (0.00)	1		£ ₹		ØT_
ω	size no. conta 11 -98 6					Dim ØA ØAA	
						R1 ØT	
						SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products whi by either of
N							Country FR
						PN: 8	D011V
					A 08-10-2 ISS DAT Designed By:	016 First Release E Latest modification - by Date:	
					TITLE	Alı	uminium
<u> </u>					SCALE NA		eral linear lerances: ±
					SOURIA	WWW.SOU	RIAU.C
				_	FORMAT A3		URIAU 0011W
l	Н	G	F	E	D	С	

