
ב	т П		0		
ØS~					
			LAYOUT SHOWN AS EXAM	MPLE	
	Keying Shown as example				
CHARACTERISTICS	Connector dimension	1			
Standard : Based on MIL-DTL-38999 Series III	Dim Nominal				
-Shell Material : Aluminium	ØS 21.8 Max Z 31 Max		SOURIAU shall not be liable for any n	on-conformity or damage	
-Shell Plating : Nickel	VV THREAD M12x1-6g]	due to a use of the Products which the Specifications issued by either of th		
-Insulator : Thermoplastic			(professional recommendation		
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer					
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum			Country FR	Jurisdiction & Control List Not Listed	_
-Durability : 500 Mating cycles					
-Delivered with Souriau contacts and Accessories			PN: 8D509F9	8PN	
-Temperature Range : -65°C to +200°C					
-Salt Spray : 48 hours		A 14-10-2016	First Release		
Mass : 11.47 g ± 10%		ISS DATE	Latest modification - by		MOD N°
		Designed By:	Date:	CUSTOMER DRAWING	
		TITLE	TITLE Aluminium Plug 8D series		
BASIC SERIES: 8D 5 - 09 F	98 P N	SCALE	General linear	NPRDS / PROJECT	
SHELL TYPE : Plug with RFI Shielding		NA -	Tolerances:	859	
				This document is the p	roperty of
			SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced or		
	SHELL SIZE : 09 CONTACT TYPE : PIN(500 Matings)			communicated without	
PLATING : F = Nickel	CONTACT LAYO	DUT : 09-98	SOURIAU D 8D509F98		SHEET

r		Q	п	m	D	0	
		Contact Layout					
4	-X	$ \begin{array}{c} $					
	Shell Arrangement Numb size 9 -98 3	+ 065 (1.65) + .038 (0.97) + .000 (0.00)075 (1.91) 065 (1.65) + .038 (0.97) er of Size Service Contact Supersedes acts contacts rating location					
ى							
	+					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe	s wl
N						(professional recommer	nda unt FR
					A 14-10-20 ISS DATE Designed By:	16 First Release	
_					SCALE NA	Alum General linea Tolerances: ±	ar :
					FORMAT A3	U WWW.SOURIAU SOURIA 8D509	٩U
l	Н	G	F	E	D	C	

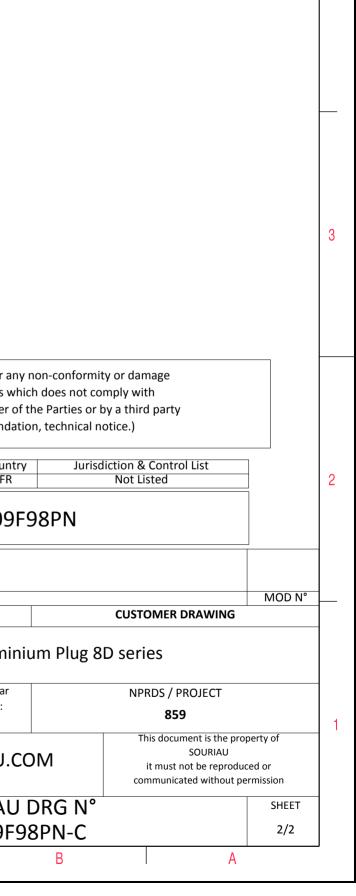

4