

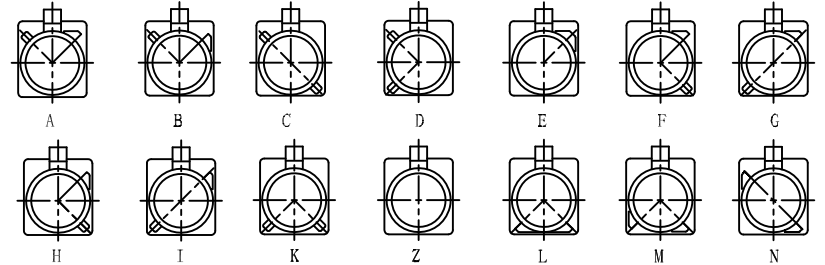
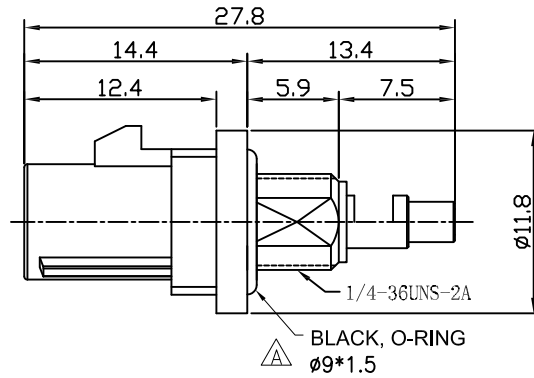



APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/6/18	
A		ADD O-RING SPEC.	04/27/20	TW
B		UPDATE TITLE SPEC. & DIM.	8/7/20	AY/RC

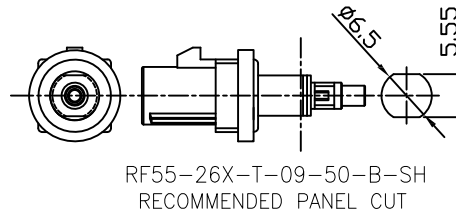


Port Type

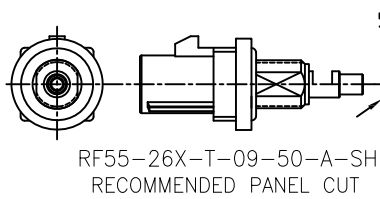

Type	Color	For Cable	Item No
A	BLACK	1.13	RF55-26A-T-09-50-X-SH
B	WHITE		RF55-26B-T-09-50-X-SH
C	BLUE		RF55-26C-T-09-50-X-SH
D	BORDEAUX VIOLET		RF55-26D-T-09-50-X-SH
E	GREEN		RF55-26E-T-09-50-X-SH
F	BROWN		RF55-26F-T-09-50-X-SH
G	GREY		RF55-26G-T-09-50-X-SH
H	VIOLET		RF55-26H-T-09-50-X-SH
I	BEIGE		RF55-26I-T-09-50-X-SH
K	CURRY		RF55-26K-T-09-50-X-SH
Z	WATER BLUE		RF55-26Z-T-09-50-X-SH
L	CARMINE RED		RF55-26L-T-09-50-X-SH
M	PASTEL ORANGE		RF55-26M-T-09-50-X-SH
N	PASTEL GREEN		RF55-26N-T-09-50-X-SH

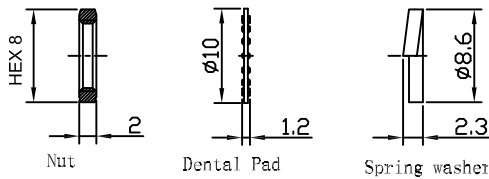

O-RING	BLACK SILICA GEL	
PLASTIC SHELL	PA66+30%GF	
COPPER TUBE	BRASS	NICKEL
INSULATOR	PTFE	
PIN CONTACT	BRASS	GOLD
BODY	BRASS	TRREE ELEMENT ALLOY
DESCRIPTION	MATERIAL	FINISH

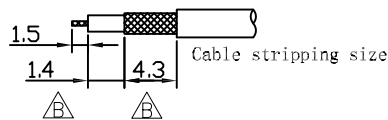

SPECIFICATIONS:

Electrical:
 Frequency range: DC~4 GHz
 Nominal Impedance: 50 ohms
 Withstanding voltage: 335 V
 Insulator Resistance: 1000 MΩ
 Contact Resistance: 6 Milliohms max. (Center Contact)
 1 Milliohms max. (Outer Contact)

Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

.X	± 0.25	Ø.XX	± 0.13
.XX	± 0.15		
.XXX	+ 0.05		

APPROVALS		DATE
DRAWN	AY	6/6/18
CHECKED	MY	6/6/18
APPROVED		

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		
FAKRA PLUG SMB TYPE STRAIGHT, BULKHEAD (IP67)		
SIZE	PART NO.	REV.
X	RF55-26X-T-09-50-X-SH	B
REF: S00134C	SCALE: NTS	SHEET 1 OF 1