

<b>T</b>	۵	нт – – – – – – – – – – – – – – – – – – –	m	0



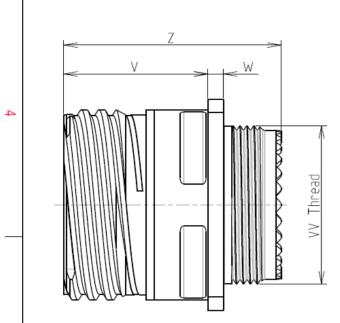

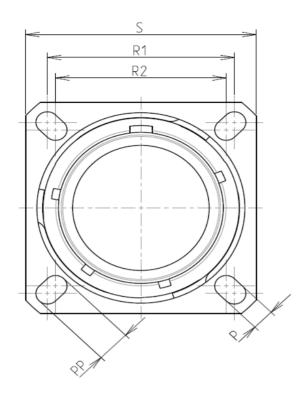

Keying Shown as example

CHARACTERISTICS
-----------------

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
$\sim$	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 71.89 g ± 10%			

8D 0

G

17

-

S


08

S

F

Ν

Dim         Nominal           P         3.25±0.2           PP         4.93±0.2           R1         26.97           R2         24.61           S         33.3±0.3           V         20.83+0/-1.25	Connector dimension		
PP         4.93±0.2           R1         26.97           R2         24.61           S         33.3±0.3	Dim	Nominal	
R1         26.97           R2         24.61           S         33.3±0.3	Р	3.25±0.2	
R2         24.61           S         33.3±0.3	PP	4.93±0.2	
S 33.3±0.3	R1	26.97	
	R2	24.61	
V 20.83+0/-1.25	S	33.3±0.3	
	V	20.83+0/-1.25	
W 2.1/2.5	W	2.1/2.5	
Z 31.5 Max	Z	31.5 Max	
VV THREAD M25x1-6g	VV THREAD	M25x1-6g	

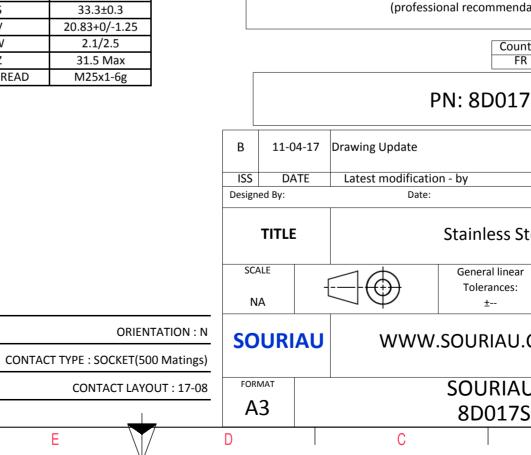

0		σ		>	1	
					4	
LAY	YOUT SHOWN AS EX	CAMPLE			3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)						
PN: 8D017S08SN						
Drawing Update Latest modificatio	on - by			MOD N°	 	
Date:	Stainless Ste	el Recept	customer drawing	j		
$\exists \Phi$	General linear Tolerances: ±		NPRDS / PROJECT <b>859</b>		1	
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
	SOURIAU 8D017S0			SHEET 1/2		
С		В	/	4	J	

		G	гт –	m	Ū	0	
		Contact Layout					Panel Cutor
4	-x (	$ \begin{array}{c} \bullet^{+\gamma} \\ \oplus^{A} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{B} \\ \oplus^{C} \\ \oplus^{+\chi} \\ \oplus^{C} \\ \oplus^{C$			22 ·	SQUARE FLANGE RECEPTACLE (TYPE C REAR MOUNTING	))
	Conta position A B C C D E	(mm) (mm) +.000 (0.00) + 236 (5.99) +.128 (3.25) +.086 (2.18) +.230 (5.84)078 (1.98) +.094 (2.39)216 (5.49)			¥	Max. thickness panel for receptacles	
ω	F G H Shell Arrangement Nur size no. coi	230 (5.84)078 (1.98) 128 (3.25) +.086 (2.18)				Ø/ R	ðA AA
						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products wl ed by either o
N						PN:	Count FR 8D017
					B 11-04-: ISS DATE Designed By:	L7 Drawing Update Latest modification - by Date:	у
-					SCALE NA		eneral linear Tolerances: ±
					FORMAT A3	SC	OURIAU
	Н	G	F	E	D	C	3D017S

