



PREMIUM MOBILE LOAD COIL ANTENNAS ARE INDUSTRY STANDARD

Laird's ongoing commitment to refinement in mechanical and electrical design has resulted in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless steel whips, housings constructed with ABS material injection molded around a solid brass insert, and gold plated push pin contacts make Laird Technologies the obvious choice for quality and long lasting value for demanding mobile radio communications.


FEATURES

- Easily removable rod allows the mount to stay water tight during car washes
- O-ring built into the base creates a weather-tight seal
- ABS material is injection molded directly around the solid brass inserts for a virtually indestructible housing that will not leak or disassemble
- All silver soldered joints provide an electrically and mechanically secure connection

MARKETS

- Public safety
- Transportation
- Utility
- Military mobile

ANTENNA PATTERNS

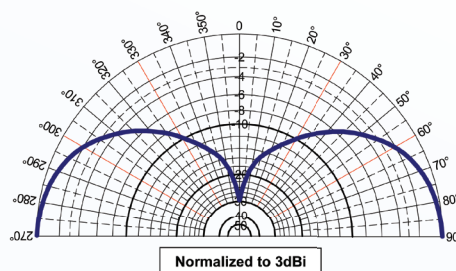

Elevation Pattern (Y, Z, or H-plane)

SPECIFICATIONS

ELECTRICAL	
Frequency Range	896-970 MHz
VSWR	< 2.1
Gain	3 dBi
Maximum Power	200 W
Input Impedance	50 Ω

MECHANICAL	
Radiator	Closed coil collinear 4 1/8"
Contact	Gold plated push pin
Brass Fitting	Copper, nickel, and chrome plated
Coil Form	3 dimensional precision machine delrin
Mounting	3/4 or 5/8" hole permanent, 3/8" Snap, Magnetic and Trunk Lid Mounts
Spring	800/900 MHz modules not available with spring
Water Resistance	<p>Normal rain and splash degree</p> <ul style="list-style-type: none"> • O-ring seal built into the coil bottom • Coil housing may be left on and the ferrule can be removed from a car wash in order to protect the mount from moisture.

MODEL AND ORDERING INFORMATION

MODEL	DESCRIPTION	OVERALL HEIGHT	TUNING
B8963	896-970 MHz, Base Loaded 5/8 Wave, Chrome Finish	7 5/8"	Fixed tune @933 MHz
BB8963	896-970 MHz, Base Loaded 5/8 Wave, Black Finish	7 5/8"	Fixed tune @933 MHz

ANT-DS-B8963 110914

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2014 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.