

Crystal Clock Oscillator

NZ2520SDA

Ultra Low Phase Noise Type

Application

- For High-quality-audio, Smartphone, Tablet computers, Wireless module, Notebook PC and DSC

Features

- Ultra low phase noise make this product ideal for High quality audio.
- Compact and light. Dimensions : 2.5 x 2.0 x 0.9 mm, weight : 0.02 g.
- Wide frequency range: 20 to 50 MHz.
- Low phase jitter (Typ. 43fs (Frequency Offset to 12kHz to 20MHz)@49.152MHz, 3.3V)
- Automatic mounting by taping and IR reflow (lead-free) are possible.
- Lead-free.

Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863



Absolute maximum rating
Supply Voltage (V_{CC}) -0.6 to +6.0 V
Storage Temperature Range -55 to +125 °C


Specifications

Item		Model	NZ2520SDA
Output Specification			CMOS
Nominal Frequency Range		(MHz)	20 ≤ F ≤ 50
Overall Frequency Tolerance		(×10 ⁻⁶)	±50
Operating Temperature Range		(°C)	-40 to +85
Supply Voltage		(V)	+1.8 to +3.3
Current Consumption Max.	During Operation	+25 °C (mA)	15
	During Standby	+25 °C (μA)	35
V _{OL} Max. / V _{OH} Min.		(V)	0.1 V _{CC} / 0.9 V _{CC}
Tr Max. / Tf Max.		(ns)	6 / 6
Symmetry Min. to Max.		(%)	40 to 60
Load (C _L) Max.		(pF)	15
Start-up Time Max.		(ms)	4
Standby function			Available (Three-state)


Characteristics

		F=22.5792MHz		F=49.152MHz	
+1.8V, +25 °C	F _{out} ±1 kHz (Typ.)	(dBc/Hz)	-158	-152	
	F _{out} ±100 kHz (Typ.)		-163	-164	
+3.3V, +25 °C	F _{out} ±1 kHz (Typ.)		-164	-158	
	F _{out} ±100 kHz (Typ.)		-169	-172	

Dimensions

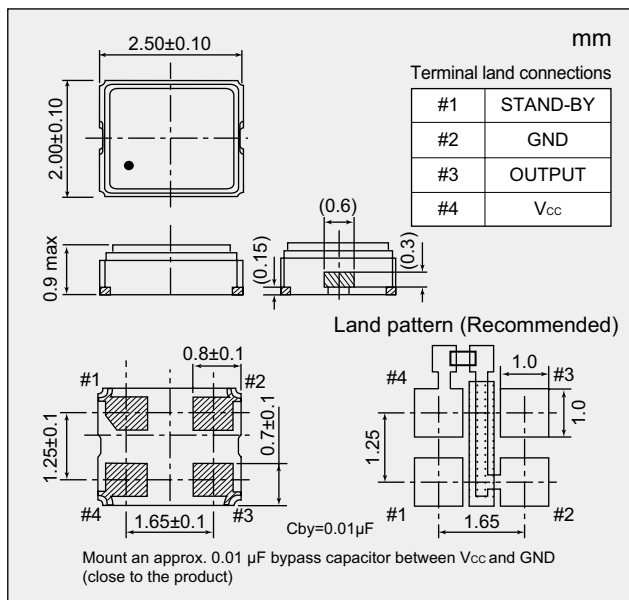

Output Waveform <CMOS>

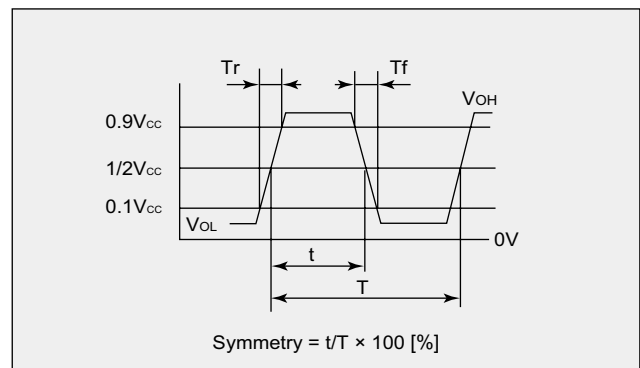

Standby Function

#1 Input	#3 Output
Level H (0.7 V _{CC} ≤ V _{IH} ≤ V _{CC}) or OPEN is selected.	Oscillation output ON
Level L (V _{IL} ≤ 0.3 V _{CC}) is selected.	High impedance

Crystal Clock Oscillator



NZ2520SDA

Ultra Low Phase Noise Type

■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range(°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.30	+3.3±0.33
±50 × 10 ⁻⁶	-40 to +85	NSC5083A	NSC5083B	NSC5083C	NSC5083D

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.