
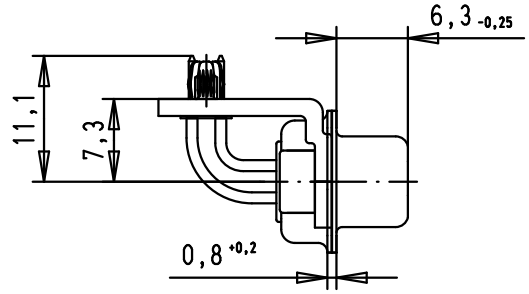


5 4 3 2 1



SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

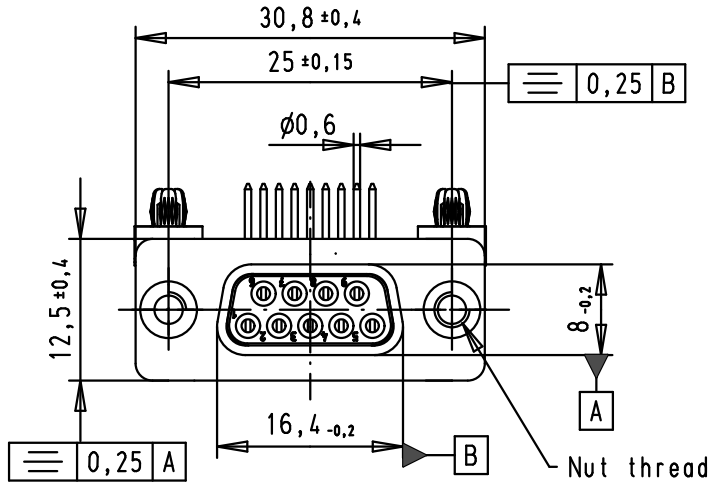

PCB Layout, Component side, thickness 1.6 mm

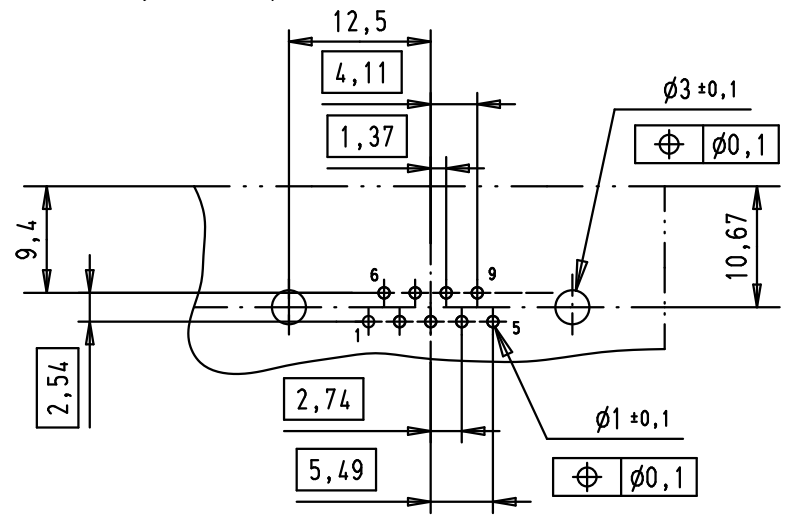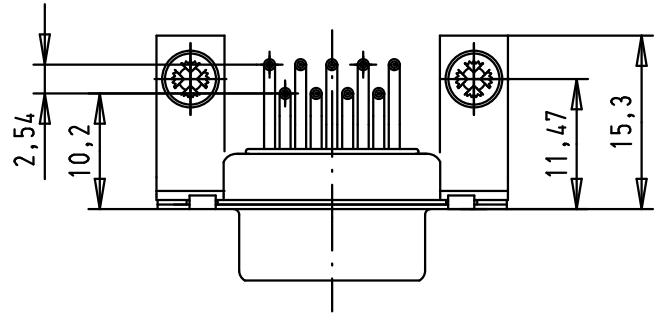

Mod.	Dat.	Name	Detail.	Dat.	Name
			8-JUL-02		CV
36283	12/01/12	SD	Insp.	12/01/12	JB
33231	07/10/05	JMDR	Stand.		
32134	16/08/04	TR			
31058	8-JUL-02	CV			

D-Sub, female, angled, 9 Poles, solder pins, board-locks and clinch nuts

Ma?Mstab/
Scale
1.5:1

09641147233	M3
09641147232	UNC 4-40
Part number	Nut thread

HARTING EURL
F-95972 Paris



TB 0964114723x
Sub.

Blatt/ Page
1 / 4

D
C
B
A