
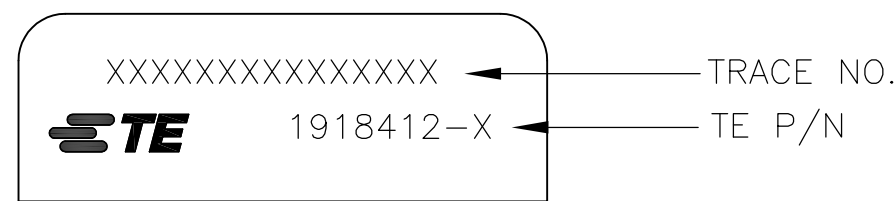


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-16-009990	06JUL16	KG	SM

1. MAXIMUM INSERTION LOSS IS 0.4dB AT 850nm.
2. SEE TRACE LABEL DETAIL.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE SPEC TEC-138-702.

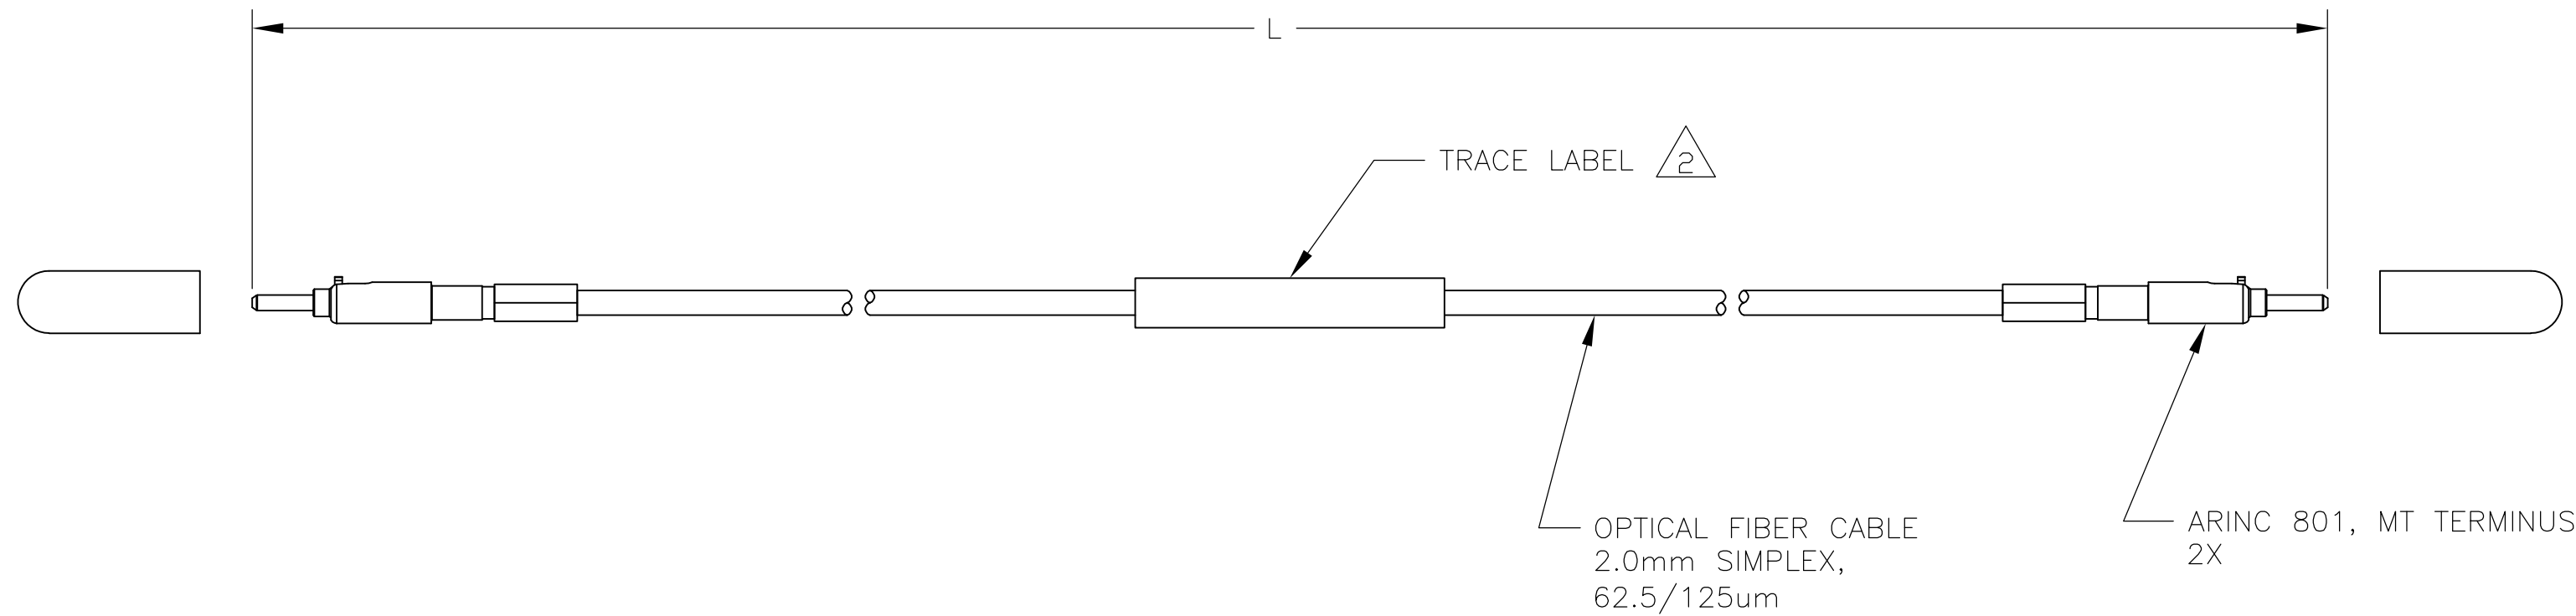

2 TRACE LABEL DETAIL
(NOT TO SCALE)

0.610±0.013 [24.0±0.5]	1918412-5
0.305±0.013 [12.0±0.5]	1918412-4
1.100+0.020/-0.0 [43.3+0.8/-0.0]	1918412-3
0.400+0.020/-0.0 [15.7+0.8/-0.0]	1918412-2
3.810±0.080 [150.0±3.1]	1918412-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 14MAR06	TE Connectivity		
DIMENSIONS: METERS [INCHES]		CHK J.BARRY 14MAR06			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.BARRY 14MAR06	NAME CABLE ASSEMBLY, FO, 2.0mm SIMPLEX 62.5/125um CABLE ARINC 801 MT TO ARINC 801 MT		
		PRODUCT SPEC	RESTRICTED TO		
MATERIAL		APPLICATION SPEC	SIZE A2	CAGE CODE 00779	DRAWING NO 1918412
FINISH		WEIGHT 0	SCALE NTS	SHEET 1 OF 1	REV A
CUSTOMER DRAWING					