



S21 TRANS LOG MAG.
▶ 0.000 dB 0.200 dB/DIU

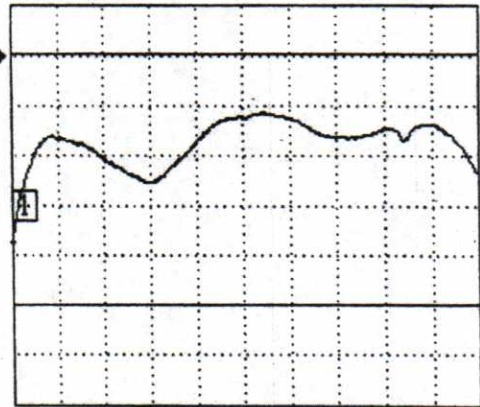

0.800000000 GHz 2.000000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

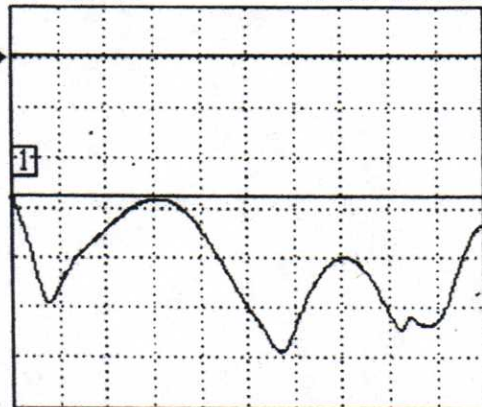


0.800000000 GHz 2.000000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
0.800000000 GHz
-0.751 dB


MARKER TO MAX
▶ MARKER TO MIN

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

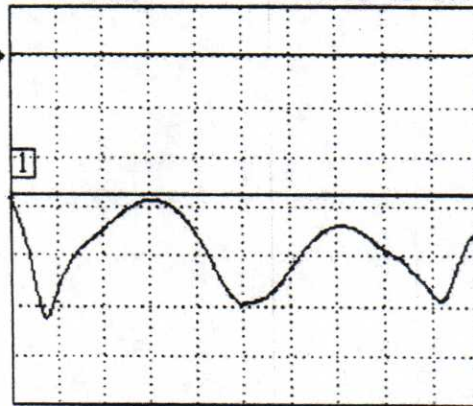

0.800000000 GHz 2.000000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

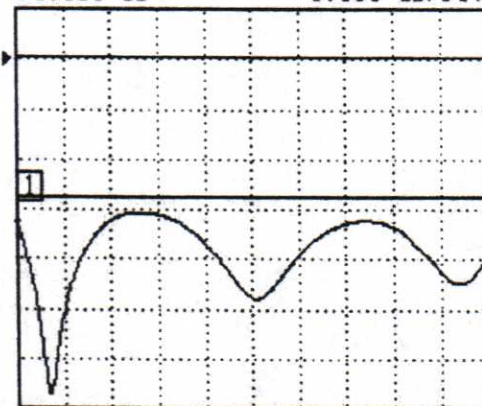

0.800000000 GHz 2.000000000

MARKER READOUT
FUNCTIONS

D3C0802N - Circulators

800 - 2000 MHz

Isolation: 14 dB Min

Insertion Loss: 1.00 dB Max

VSWR: 1.50:1 Max

Type - N - F connectors