
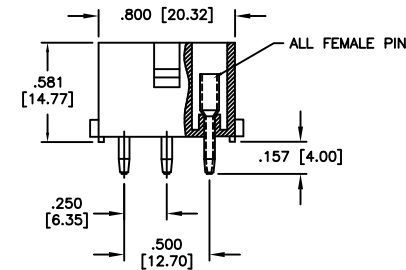



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	

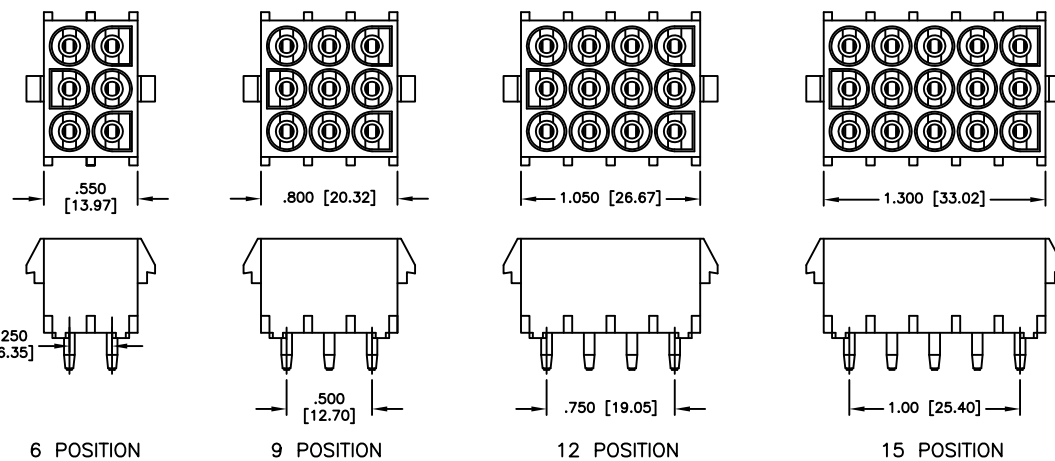

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Contacts: Phosphor Bronze, Tin plated
 Electrical:
 Current rating: 06~15P: 9 Amp Max (With UL1007, 16AWG)
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000M ohms min
 Dielectric withstanding voltage: 2,900 VAC for 1 minute
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



A = .250 [6.35] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	LH	2/21/20
CHECKED	AY1	2/21/20
APPROVED		

TITLE WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITHOUT POLARIZING PEG, FEMALE PIN			
SIZE X	PART NO. DME-F-XX-S2-SQ	REV. -	
REF: S00124T	SCALE: NTS	SHEET 1 OF 1	