

ECN/PCN No.: 3522

For Manufacturer			
Product Description: Thru-Hole	Abracon Part Number / Part Series: AFC10.7M		<input checked="" type="checkbox"/> Series <input type="checkbox"/> Part Number
Affected Revision: 06/25/2018	New Revision: EOL	Application:	<input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-Safety
Prior to Change: https://abracon.com/Filters/AFC107M.pdf			
After Change: EOL			
Cause/Reason for Change: Production will be discontinued			
Change Plan			
Effective Date: Immediate	Additional Remarks:		
Change Declaration:			
Issued Date: <div style="text-align: center;">4/22/20</div>			
For Abracon EOL only			
Last Time Buy (if applicable): 9/15/2020	Alternate Part Number / Part Series: <div style="text-align: center; color: blue;">None</div>		
Additional Approval:	Additional Approval:	Additional Approval:	
Customer Approval (If Applicable)			
Qualification Status: <div style="text-align: center;"><input type="checkbox"/> Approved <input type="checkbox"/> Not accepted</div> <i>Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.</i>			
Customer Part Number:		Customer Project:	
Company Name:	Company Representative:	Representative Signature:	
Customer Remarks:			

10.7MHz CERAMIC FILTER



7.0 x 4.0 x 7.0 mm

AFC10.7M

Pb in ceramic (exempt per
RoHS 2002/95/EC Annex (7)).

RoHS
Compliant

FEATURES:

- Small size, Light weight
- Low loss/High attenuation option available
- Low cost thru hole package

APPLICATIONS:

- FM receivers
- Digital transmission systems
- Communications applications

STANDARD SPECIFICATIONS:

MAXIMUM RATINGS

Item	Requirement
Withstanding Voltage(V)	50(DC, 1min)
Insulation Resistance Ri (MΩ) min.	100(10V, 1min)
Operating temperature	-40°C ~ +85°C
Storage temperature	-40°C ~ +85°C

ELECTRICAL CHARACTERISTICS


Part Number	3dB Bandwidth (kHz)	20 dB Bandwidth (kHz) max.	Insertion Loss (dB)max	Spurious Attenuation 9-12MHz dB min	Input/Output Impedance (Ω)	Special design
AFC10.7MC35	180 ± 40	470	3.5±2.0	35	330	Low-Loss
AFC10.7MJ45	150 ± 40	360	5.5±2.0	35	330	Wide/ Narrow Bandwidth
AFC10.7MW110	110 ± 30	350	10.0	30	330	

TEST CIRCUIT

Test conditions:

Parts shall be tested under the condition (Temp.: 20± 15°C, Humidity: 65±20% R.H.) unless the standard condition (Temp.: 25±2°C, Humidity: 65±5% R.H.) is regulated to measure

$R_g + R_1 = R_2 =$ Input/Output Impedance (Ω)
C=10pF (Including stray capacitance and capacitance of RF voltagemeter)

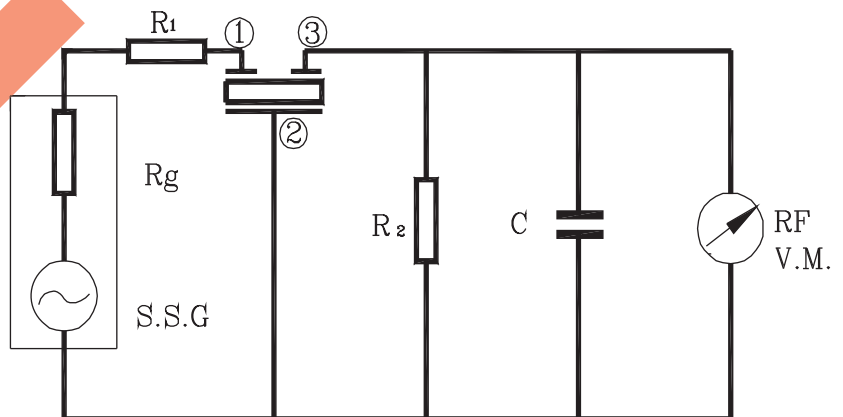

REVISED: 06.25.2018

10.7MHz CERAMIC FILTER

AFC10.7M

Pb in ceramic (exempt per RoHS 2002/95/EC Annex (7)).

RoHS
Compliant



7.0 x 4.0 x 7.0 mm

OPTIONS AND PART IDENTIFICATION

(Left blank if standard)

AFC10.7M□□□□ - □

Part Number
See table in Section 2.2

Packaging	
Blank	Bulk
A	AMMO packing

OUTLINE DIMENSIONS:

