
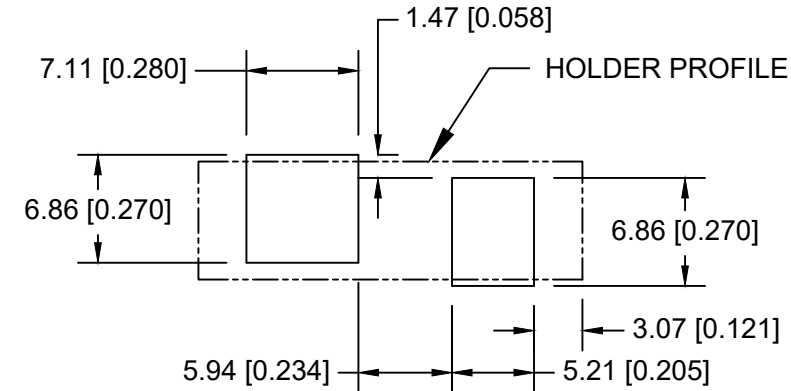
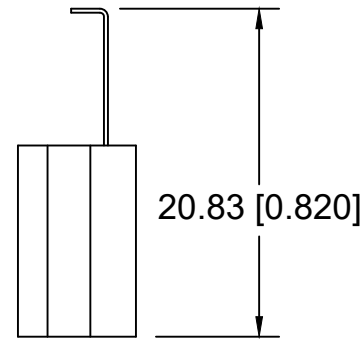
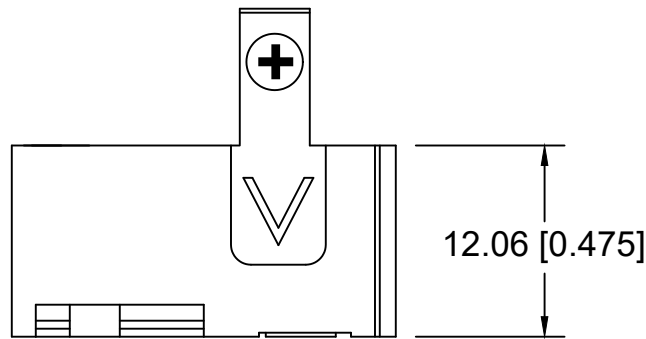



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/06/18	A	Added flammability rating	T.B.	B.S.	
05/03/19	B	Added Dim. 1.47 to PCB layout	T.B.	B.S.	
10/31/19	C	Added weight of the part	T.B.	B.S.	

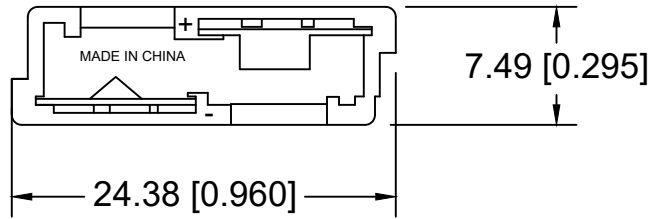

PCB LAYOUT

NOTES:

MATERIAL: LCP ZENITE 6130, COLOR NATURAL
 FLAMMABILITY RATING: UL94V-0, UL FILE NO. E344082
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
 ELECTRICAL :
 VOLTAGE: 250V AC
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000mΩ AT DC 500V
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE
 TEMPERATURE RANGE: -40°C TO +200°C
 APPROXIMATE WEIGHT: 1.88g
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title BR/CR/DL 2032 VERTICAL BATTERY HOLDER, SURFACE MOUNT		
Fractional ± .8 (.030)	Date 10/31/19	Drawing Number BK-5058-SM	
Angular ± 3°			