

ITEM	PART#	DESCRIPTION	QTY	UOM
A	522130211	2.5 MINI WATER PROOF 2CKT 522130211	1	PC
C	501488000	2.5 W.P. CONN CRIMP PIN	2	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A2	--	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK

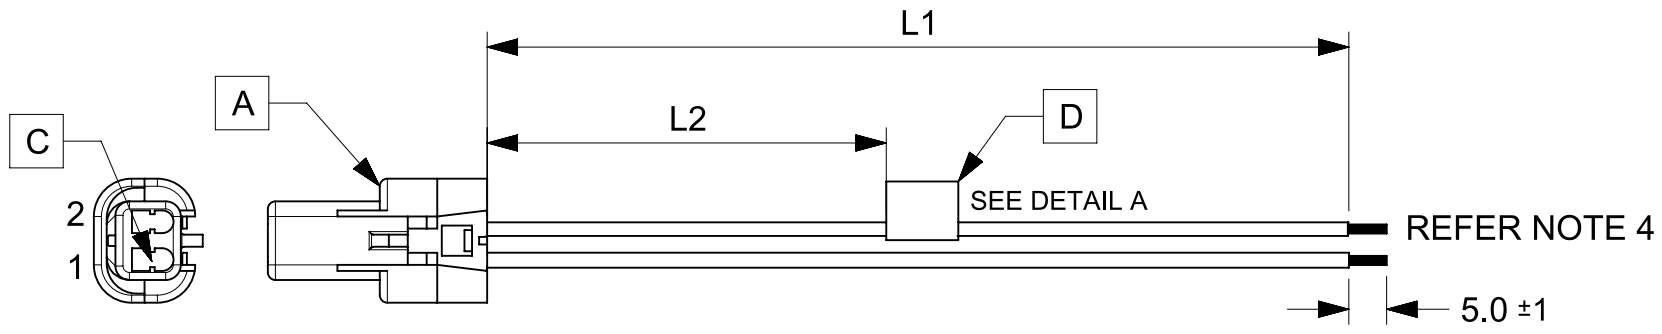


TABLE			
PART NUMBER	L1	L2	TITLE
2153111021	150±8	63 REF	MizuP25 R-S 2ckt 150mm Sn
2153111022	300±10	138 REF	MizuP25 R-S 2ckt 300mm Sn
2153111023	600±10	288 REF	MizuP25 R-S 2ckt 600mm Sn

- NOTES**
1. Connector view shown is from mating side.
  2. Harness must pass 100% electrical continuity and polarity.
  3. Connectors must pass the sealing specifications as defined by manufacturer.
  4. The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 1.25mm max.
  5. Label text must be 2mm max. in height with Arial font.
  6. Label must be wrapped in flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
DIVISIONAL SYMBOLS	mm	NTS	ANGULAR TOL ± °		
4 PLACES ±		EC NO: 641784		REFER THE TABLE	
3 PLACES ±		DRWN: NNANKOLA 2020/07/15		PRODUCT CUSTOMER DRAWING	
2 PLACES ±		CHK'D: SD 2020/07/20		DOCUMENT NUMBER	
1 PLACE ±		APPR: SD 2020/07/20		2153111021	
0 PLACES ±		INITIAL REVISION:		DOC TYPE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWN: NNANKOLA 2020/07/15		PSD	
THIRD ANGLE PROJECTION		APPR: SD 2020/07/20		DOC PART	
DRAWING		SERIES		000	
A4-SIZE		215311		REVISION	
MATERIAL NUMBER		CUSTOMER		A	
REFER THE TABLE		GENERAL MARKET		SHEET NUMBER	
1 OF 1					