

VI/06-11-18




### International Presence

#### Contact Melexis:

Europe, Middle East and Africa  
sales\_europe@melexis.com  
Tel. +32 13 67 04 95

Asia and Oceania  
sales\_asia@melexis.com  
Tel. +86 21 5820 6899


Americas  
sales\_usa@melexis.com  
Tel. +1 248 306 5400

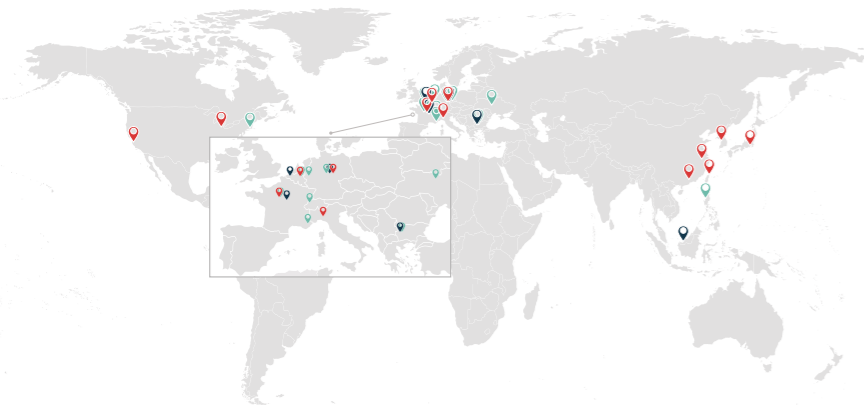

- Research & Development
- Sales & Applications
- Manufacturing




[WWW.MELEXIS.COM](http://WWW.MELEXIS.COM)

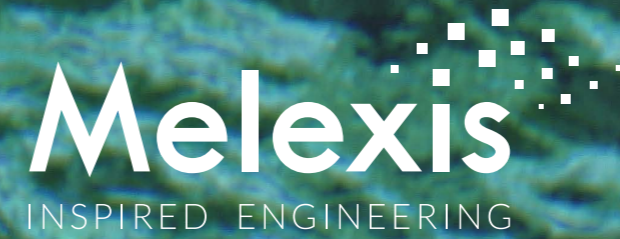

SELECTION GUIDE

# CURRENT SENSORS

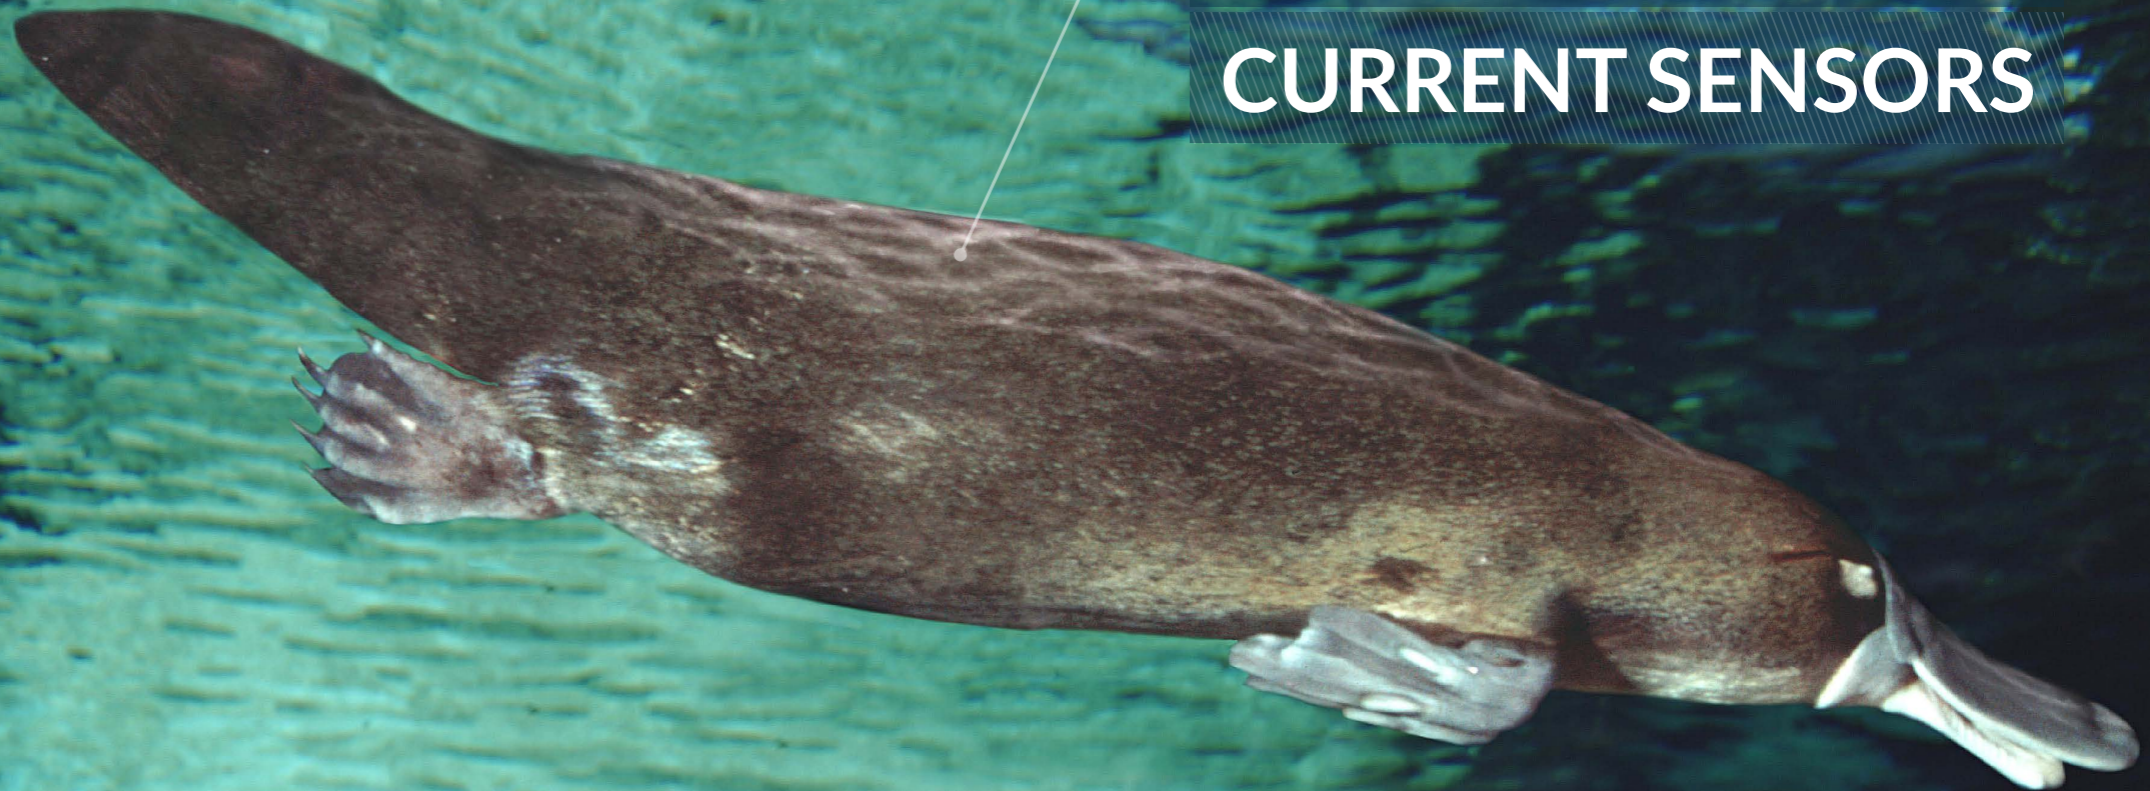






The snout of the platypus is a sensory organ with electroreceptors in the skin of the bill, which allow him to detect the electrical field that gets generated when his prey contracts its muscles. With his 40,000 sensitive electronic sensors, this unique semi aquatic egg-laying mammal represents our current sensors.

Our current sensors rely on cutting-edge implementation of Hall Effect technology for leading accuracy current monitoring in cars, domestic and industrial environments.

Current Sensors																				
Type	Status	Part No.	Grade	Temp °C	Supply Voltage V	Supply Current mA	Output Type	Magnetic Saturation (2) mT	Sensitivity (1)		Programming Range mV/mT	Programmable [Daughter Board] (3)	Package	Ratiometry	Bandwidth kHz	Plate Polarity	Overvoltage / reverse polarity protection V	Sensing Range	Voltage Isolation	
									mV/mT	mV/A									IEC-60950	UL-1577
IMC-HALL®	EOL	CSA-1VG	IC	-40...125 °C	5V +/--10%	11	Analog - Differential	10	280	-	-	-	SOIC8	✓	100	Direct	+ 6 / 0	B	-	-
	Prod	MLX91205KDC-AAI-003	IC	-40...125 °C	5V +/--10%	11	Analog - Differential	10	280	-	-	-	SOIC8	✓	100	Direct	+ 6 / 0	B	-	-
	Prod	MLX91205KDC-AAH-003	AIC	-40...125 °C	5V +/--10%	11	Analog - Differential	25	100	-	-	-	SOIC8	✓	100	Direct	+ 6 / 0	B	-	-
	Prod	MLX91206LDC-CAL-001	IC	-40...150 °C	5V +/--10%	7-9	Analog	10	580	-	460 - 700	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAL-002	IC	-40...150 °C	5V +/--10%	7-9	Analog	10	380	-	300 - 470	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAL-003	IC	-40...150 °C	5V +/--10%	7-9	Analog	10	250	-	200 - 310	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-001	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	270	-	210 - 330	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-002	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	170	-	130 - 220	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-003	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	110	-	80 - 140	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-004	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	77.5	-	60 - 110	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-005	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	65	-	65	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-021	AIC	-40...150 °C	5V +/--10%	7-9	Analog	25	270	-	210 - 330	Hall03	SOIC8	-	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91206LDC-CAH-104	AIC	-40...150 °C	5V +/--10%	7-9	PWM	25	2.2	-	0.5 - 5% DC/mT	Hall03	SOIC8	-	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91208LDC-CAL-000	AIC	-40...150 °C	5V +/--10%	12	Analog	10	250	-	100 - 700	Hall05	SOIC8	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91208LDC-CAH-000	AIC	-40...150 °C	5V +/--10%	12	Analog	25	100	-	50 - 300	Hall05	SOIC8	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91208LDC-CAV-000	AIC	-40...150 °C	5V +/--10%	12	Analog	60	40	-	30 - 200	Hall05	SOIC8	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91208LDC-CAV-001	AIC	-40...150 °C	5V +/--10%	12	Analog	60	60	-	30 - 200	Hall05	SOIC8	✓	250	Direct	+10 / -0.3	UB	-	-
	NEW	MLX91216LDC-ACH-000	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	25	100	-	50 - 300	Hall05	SOIC8	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-
	NEW	MLX91216LDC-ACV-000	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	60	40	-	30 - 200	Hall05	SOIC8	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-
NEW	MLX91216LDC-ACV-001	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	60	60	-	30 - 200	Hall05	SOIC8	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-	
CONVENTIONAL HALL	Prod	MLX91207LDC-CAA-005	AIC	-40...150 °C	5V +/--10%	9	Analog	-	25	-	15 - 45	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91207LDC-CAA-007	AIC	-40...150 °C	5V +/--10%	9	Analog	-	10	-	5 - 20	Hall03	SOIC8	✓	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91207LDC-CAA-015	AIC	-40...150 °C	5V +/--10%	9	Analog	-	25	-	15 - 45	Hall03	SOIC8	-	70	Direct	+20 / -10	UB	-	-
	Prod	MLX91209LVA-CAA-000	AIC	-40...150 °C	5V +/--10%	12	Analog	-	50	-	5 - 150	Hall05	SIP4-VA	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91209LVA-CAA-001	AIC	-40...150 °C	5V +/--10%	12	Analog	-	15	-	5 - 150	Hall05	SIP4-VA	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91209LVA-CAA-002	AIC	-40...150 °C	5V +/--10%	12	Analog	-	7.3	-	5 - 150	Hall05	SIP4-VA	✓	250	Direct	+10 / -0.3	UB	-	-
	Prod	MLX91209LVA-CAA-003	AIC	-40...150 °C	5V +/--10%	12	Analog	-	19	-	5 - 150	Hall05	SIP4-VA	✓	250	Direct	+10 / -0.3	UB	-	-
	NEW	MLX91217LVA-ACA-000	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	-	10	-	5 - 150	Hall05	SIP4-VA	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-
	NEW	MLX91217LVA-ACA-003	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	-	9	-	5 - 150	Hall05	SIP4-VA	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-
	NEW	MLX91217LVA-ACA-005	AIC	-40...150 °C	5V +/--10%	10 / 12.5	Analog	-	13	-	5 - 150	Hall05	SIP4-VA	✓	250 (prog)	Direct	+10 / -0.3	UB	-	-
INTEGRATED PRIMARY	Prod	MLX91210KDC-CAS-101	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	80	-	-	SOIC8	✓	100	Direct	+10 / -0.3	B	2.1kVac	2.5kVac
	Prod	MLX91210KDC-CAS-102	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	40	-	-	SOIC8	✓	100	Direct	+10 / -0.3	B	2.1kVac	2.5kVac
	Prod	MLX91210KDC-CAS-104	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	32	-	-	SOIC8	✓	100	Direct	+10 / -0.3	B	2.1kVac	2.5kVac
	Prod	MLX91210KDC-CAS-105	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	66.7	-	-	SOIC8	✓	100	Direct	+10 / -0.3	B	2.1kVac	2.5kVac
	Prod	MLX91210KDC-CAS-106	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	50	-	-	SOIC8	✓	100	Direct	+10 / -0.3	B	2.1kVac	2.5kVac
	Prod	MLX91210KDF-CAS-101	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	80	-	-	SOIC16WB	✓	100	Direct	+10 / -0.3	B	2.5kVac	2.5kVac
	Prod	MLX91210KDF-CAS-102	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	40	-	-	SOIC16WB	✓	100	Direct	+10 / -0.3	B	2.5kVac	2.5kVac
	Prod	MLX91210KDF-CAS-103	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	26.7	-	-	SOIC16WB	✓	100	Direct	+10 / -0.3	B	2.5kVac	2.5kVac
	Prod	MLX91210KDF-CAS-104	IC	-40...125 °C	5V +/--10%	12	Analog	-	-	32	-	-	SOIC16WB	✓	100	Direct	+10 / -0.3	B	2.5kVac	2.5kVac

(1) Sensitivity at nominal supply voltage, can scale with ratiometry.

PACKAGES		
	VISUAL APPEARANCE	GREEN COMPLIANCE
THROUGH-HOLE PACKAGE	 SIP4-VA	
SURFACE MOUNT PACKAGE	 SOIC8  SOIC16WB	

**Explanation**  
A = Automotive (AEC - Q100)  
I = Industrial  
C = Consumer  
U = Unipolar  
B = Bipolar  
SOIC16WB = SOIC16 Wide Body  
EOL = End of life  
Prod = In production

