

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334823601	MX150 ASSY 1.5 BLD 2X3 BLK A/6	2	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	12	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B3	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A4	B6	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A5	B5	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A6	B4	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

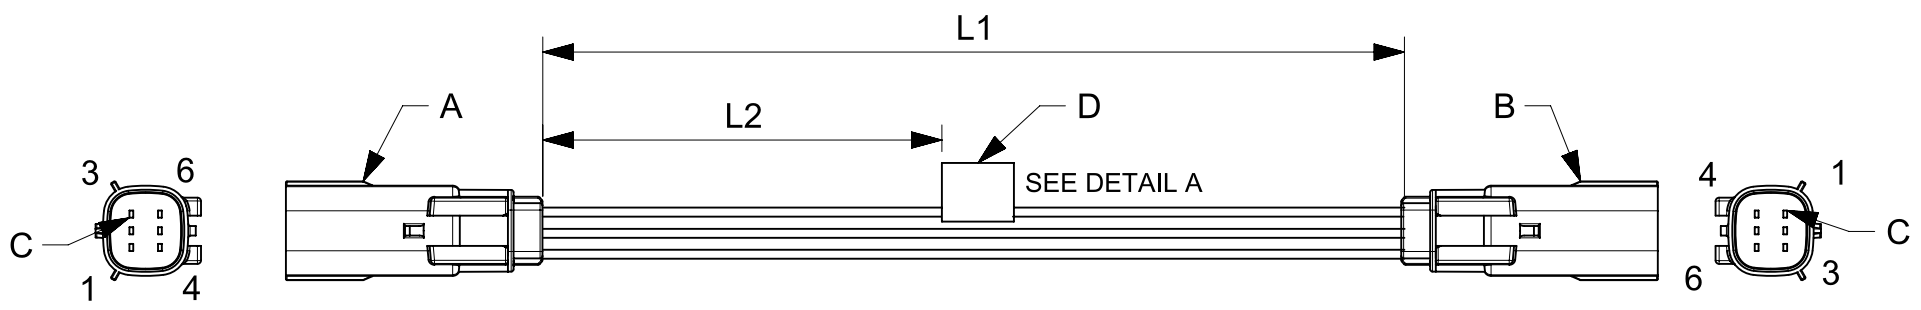


TABLE			
PART NUMBER	L1	L2	TITLE
2162871061	150±8	63 REF	MX150 P-P DR 6ckt 150mm Sn sealed cable
2162871062	300±10	138 REF	MX150 P-P DR 6ckt 300mm Sn sealed cable
2162871063	600±10	288 REF	MX150 P-P DR 6ckt 600mm Sn sealed cable

NOTES

1. Connector assembly must pass 100% continuity and polarity test.
2. Sealing must pass the IP67 rating as defined by product specification.
3. Connector view shown is from mating side.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p>
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	NTS	ANGULAR TOL ± °		
	4 PLACES ±		3 PLACES ±		
3 PLACES ±		2 PLACES ±		EC NO: 643544	PRODUCT CUSTOMER DRAWING
2 PLACES ±		1 PLACE ±		DRWN: NNANKOLA 2020/06/29	
1 PLACE ±		0 PLACES ±		CHK'D: SD 2020/08/31	DOCUMENT NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	APPR: SD 2020/08/31	
			SERIES	INITIAL REVISION:	DOC TYPE
			A4-SIZE	DRWN: NNANKOLA 2020/06/29	PSD
			216287	APPR: SD 2020/08/31	DOC PART
					000
					REVISION
					A
					SHEET NUMBER
					1 OF 1