


ALA8DF391DC400

Aliases (A543EE391M400F)

ALA8D, Aluminum Electrolytic, 390 uF, 20%, 400 VDC, -40/+105°C

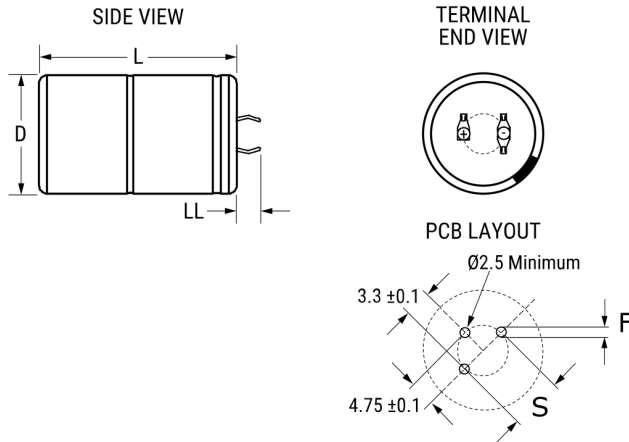

Click [here](#) for the 3D model.

Dimensions

| | |
|----|---------------|
| D | 35mm +1mm |
| L | 35mm +/-2mm |
| S | 10mm +/-0.1mm |
| LL | 4mm +/-1mm |
| F | 2mm +/-0.1mm |

Packaging Specifications

| | |
|--------------------|-----------|
| Packaging | Bulk, Bag |
| Packaging Quantity | 100 |

General Information

| | |
|------------------|---|
| Series | ALA8D |
| Dielectric | Aluminum Electrolytic |
| Description | Snap-In, Aluminum Electrolytic |
| RoHS | Yes |
| Lead | 3 Pin |
| Qualifications | AEC-Q200 |
| AEC-Q200 | Yes |
| Halogen Free | Yes |
| Component Weight | 60 g |
| Miscellaneous | Vibration: <= 35mm 1.5mm displacement amplitude or 20G maximum acceleration. Vibration applied for three directions of 4-hour sessions at 10 - 2,000 Hz. (Capacitor clamped by body.) |
| Shelf Life | 156 Weeks |

Specifications

| | |
|-----------------------|--|
| Capacitance | 390 uF |
| Capacitance Tolerance | 20% |
| Voltage DC | 400 VDC, 440 VDC (Surge) |
| Temperature Range | -40/+105°C |
| Rated Temperature | 105°C |
| Life | 8000 Hrs (Rated Voltage And Ripple Current At 105C), 13000 Hrs (Rated Voltage At 105C) |
| Resistance | 394 mOhms (100Hz 20C), 233.4 mOhms (10kHz 20C) |
| Ripple Current | 2.18 Amps (100Hz 105C), 5.4 Amps (10kHz 105C) |
| Leakage Current | 468 uA (5min 20°C) |