

## SUMMARY

### # Wires

Low voltage 4

Series 0M  
Termination type Male crimp  
IP rating 68  
AWG wire size 26.00 - 22.00  
Cable Ø 4.00 - 8.00 mm  
Status active  
Matching parts [EGN.0M.304.XLM](#)



*Image is for illustrative purpose only*

### Download

[Request a quote](#)  
[Catalog](#)  
[See video assembly instructions](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model FG\*: Straight plug with arctic grip and mold stop  
Keying 3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)  
Housing Material Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass  
Weight 6.88 g

### Performance

Configuration 0M.304 : 4 Low Voltage  
Insulator L: PEEK  
Rated Current 7 Amps

### Specifications

Contact Type: Crimp  
Contact Retention: 22 N  
Contact Dia.: 0.7 mm (0.028in)  
Bucket Dia.: 0.8 mm (0.031in)  
Min. Conductor: 0.14 mm<sup>2</sup> (AWG 26)  
Max. Conductor: 0.34 mm<sup>2</sup> (AWG 22)  
R (max): 6.1 mOhm  
Test voltage (kV rms) Contact-contact: 1.35

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Test voltage (kV rms) Contact-shell: 0.9

## Others

Endurance (Shell): 3000 mating cycles

Temp (min / max): -20°C / +200°C

Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]

Shock Resistance: 300 g [ 3 ms]


Lighting strike EIA 364-75: 10K amps - 6 times

Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: max. 48 hr

## DRAWINGS

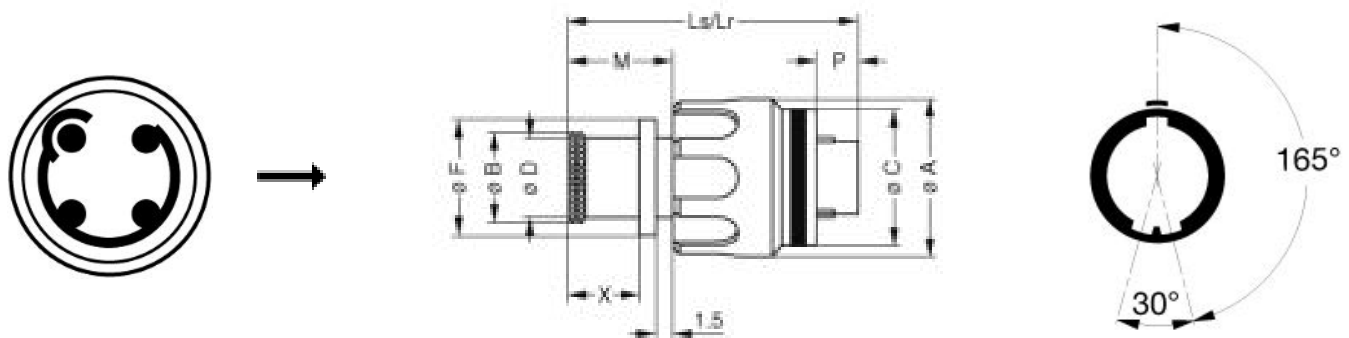

## Dimensions

|     | A    | B    | C    | D    | F    | Lr   | Ls   | M    | P    | X    |
|-----|------|------|------|------|------|------|------|------|------|------|
| mm. | 14.4 | 8.8  | 12.7 | 8    | 10.7 | 27.1 | 27.1 | 9.7  | 3.9  | 6.7  |
| in. | 0,57 | 0,35 | 0,50 | 0,31 | 0,42 | 1,07 | 1,07 | 0,38 | 0,15 | 0,26 |

## RECOMMENDED BY LEMO

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Tools

|                      |                                 |
|----------------------|---------------------------------|
| Crimp Tool:          | <a href="#">DPC.91.701.V</a>    |
| Crimp settings:      | AWG/Selector = 22-24-26/6-5-5   |
| Positionner:         | <a href="#">DCE.91.070.5MVC</a> |
| Extractor:           | <a href="#">DCF.93.070.4LT</a>  |
| Replacement contact: | FGN.0M.555.ZZC                  |

## Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*