

# LC2

## High Power Resonant Capacitors



### FEATURES

High AC Voltage - High current

### APPLICATIONS

Induction Heating - Tank Circuits

<b>KVAR</b>	<b>200</b>
<b>CAPACITANCE TOLERANCE</b>	<b>+/-10%</b>
<b>MAXIMUM CORE TEMPERATURE</b>	<b>+85°C</b>
<b>SURFACE TEMPERATURE</b>	<b>+45°C</b> (Above 45°C the KVAR rating must be de-rated by 2.25%/°C)
<b>CONSTRUCTION</b>	<b>Self-healing</b>
<b>SELF INDUCTANCE</b>	<b>&lt;5 nH</b>
<b>DIELECTRIC</b>	<b>Polypropylene</b>
<b>FLAME RETARDANT</b>	<b>UL94V0</b>

### Standard part listing

Capacitance (µF)	VAC	IC part number	Maximum RMS current (A)	MAX power kvar	Frequency range (kHz)	ESR (mΩ) 100kHz, +25°C	Dimensions (mm)			Terminal Style
							B	H	L	
0.33	700	334LC2700K5HM6	300	200	196 – 216	1.0	34	50	50	5HM6
0.66	600	664LC2600K5HM6	350	200	135 – 149	0.8	34	50	50	5HM6
1.20	500	125LC2500K5HM6	400	200	105	0.5	34	50	50	5HM6
1.50	500	155LC2500K5HM6	400	200	85 - 108	0.3	34	50	50	5HM6
2.60	400	265LC2400K5HM6	450	200	80 - 96	0.2	34	50	50	5HM6



Your Global Source for World-Class Capacitors

© 2013 Illinois Capacitor, Inc.

North America  
Tel: 847.675.1760  
sales@illcap.com


Asia  
Tel: 852.2793 0931  
sales@illcap.com.hk

# LC2

## High Power Resonant Capacitors



LEAD STYLE: 5HM6

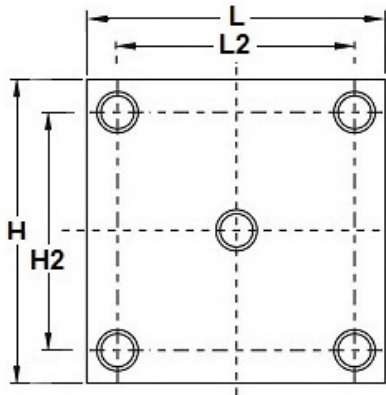

L	H	B	H2	L2
50±1.0	50±1.0	34±0.5	36±1.0	36±1.0
Mounting Holes: M6 Tap				
Tightening torque: 20Nm MAX				



**iC ILLINOIS CAPACITOR**

Your Global Source for World-Class Capacitors

© 2013 Illinois Capacitor, Inc.

**North America**  
Tel: 847.675.1760  
sales@illcap.com

**Asia**  
Tel: 852.2793 0931  
sales@illcap.com.hk



### Frequency Derating

— Voltage — Current — Power

