

OPTO-150

15kV High Voltage Opto-Coupler

Features

- **Easy to Use**
- **No External Components Required**
- **Internal Current Limiting Resistors**
- **Small Footprint**
- **15kV Reverse Voltage Rating**
- **Fast Response**
- **Miniature PC Board Mountable Package**
- **Wide Operating Temp Range (-40°C to +85°C)**




Mechanical Characteristics

- **Packaging:** Encapsulated in high performance epoxy

Environmental Characteristics


- **Operating Temp Range:** -40°C to +85°C
- **Storage Temp Range:** -55°C to +85°C

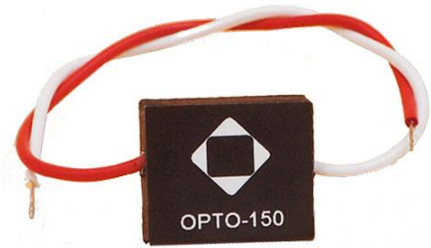

Description

The **OPTO-150** is a miniature, 15kV rated high voltage optocoupler which integrates low voltage LED drivers with high voltage photo detector diodes. Designed for ease of use, the **OPTO-150** delivers circuit isolation in a space-saving (0.55”L x 0.65”W x 0.25”H) encapsulated package.


Typical applications for the **OPTO-150** include high voltage switching, high voltage isolation, external voltage sensing, voltage level shifting, and mass spectrometry.

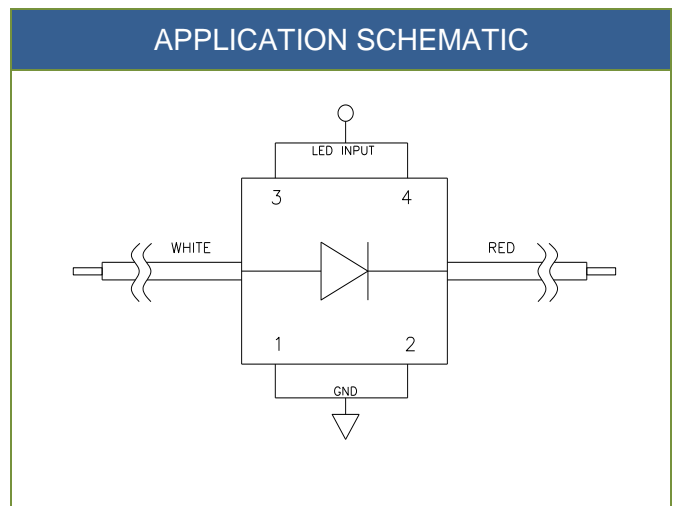



ELECTRICAL CHARACTERISTICS	
Absolute Max	
LED Forward Current	360 mA
LED Reverse Voltage	5 V
LED Max Input Voltage	5 V
Forward Voltage Drop	1.9 V
Photodiode Reverse Voltage	15,000 V
Max Output Power	1.25 W
Typical	
LED Forward Voltage @100mA Current Drive	3.25 V
Reverse Leakage Current @15,000 V	<10 nA
DC Current Transfer Ratio	0.15%
Turn-on Time	2 μ s
Turn-off Time	2 μ s




All specifications at 25°C ambient temperature unless otherwise stated.

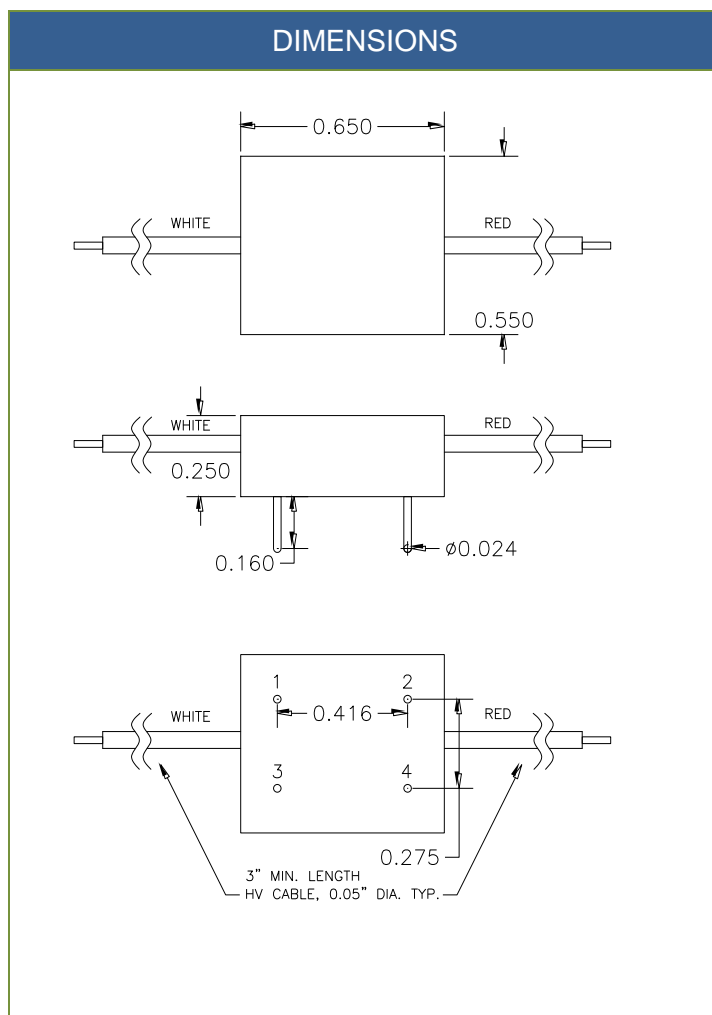

Pin Labels	
Pin 1	LED GND
Pin 2	LED GND
Pin 3	LED Input
Pin 4	LED Input



www.hvmtech.com

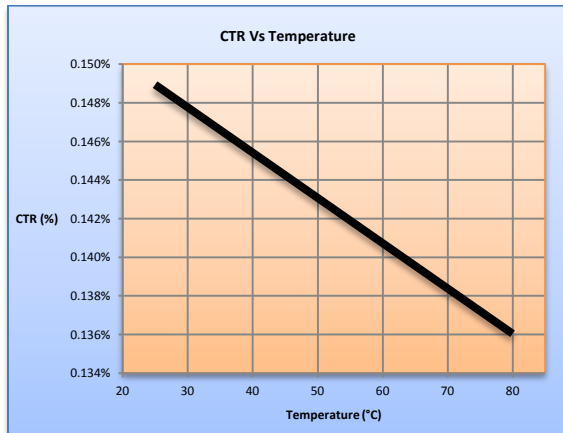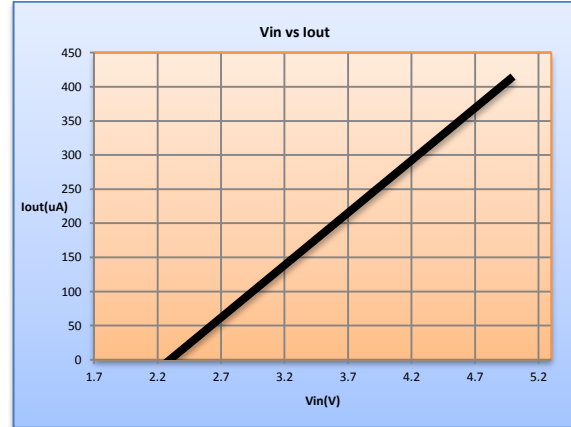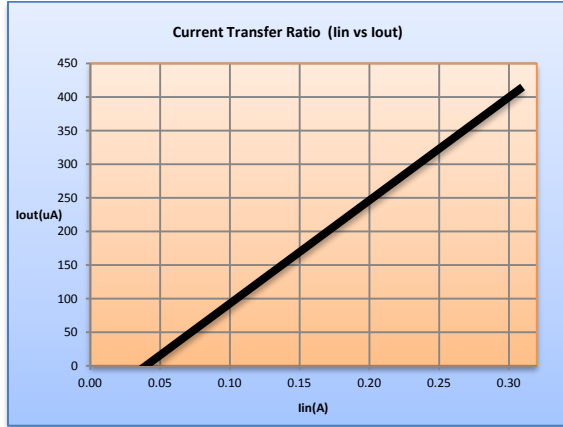

HVM TECHNOLOGY, INC., 360 McKenna Ave, New Braunfels, TX 78130
Tel: (830) 626-5552 ext 211 / <http://www.hvmtech.com> / email: sales@hvmtech.com