


PBC Layout
(Top View)

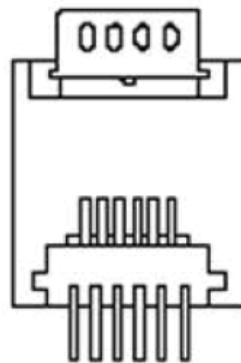

Materials:

- Insulator: Nylon, UL94V-0
- Soldering Temperature: 260°C
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Color: Black
- Hold Down: Copper Plating Tin

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.



Scale	1:1						Name
TOLERANCE					Drawn	12.21.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification					Date	Name	ASSMANN components

Item No.		A-2014-1-4-SMT-N-R
Title		
Drawing No.		rev00
Replace	Sheet	

