


## PME261KE7100MR30

Aliases (P561EL105M220A)

Obsolete

PME261/P561, Film, Metallized Paper, General Purpose, 1  $\mu$ F, 20%, 400 VDC, 85°C, Lead Spacing = 25.4mm

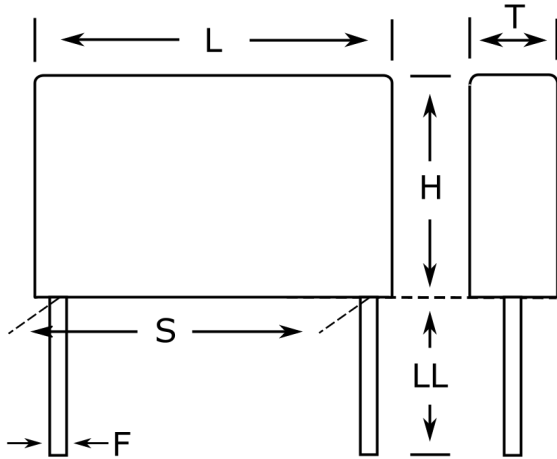

Click [here](#) for the 3D model.

### Dimensions

L	30.5mm -0.5mm
H	22mm -0.5mm
T	15.3mm -0.5mm
S	25.4mm +/-0.4mm
LL	30mm +5mm
F	1mm +/-0.05mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	75

### General Information

Series	PME261/P561
Dielectric	Metallized Paper
Style	Radial
Features	Pulse in DC and low frequency applications
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Construction	Molded
Component Weight	13.5 g
Miscellaneous	AC Operation: 70C MAX.

### Specifications

Capacitance	1 $\mu$ F
Capacitance Tolerance	20%
Voltage AC	220 VAC
Voltage DC	400 VDC
Temperature Range	-40/+100°C
Rated Temperature	85°C
Dissipation Factor	1.3% 1kHz
Insulation Resistance	12 GOhms
Max dV/dt	220 V/ $\mu$ s