



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-920499~502	2009/02/24	Vicky	Update the drawing.
C	LEN1630185~188	2016/03/07	Vicky	Update Logo

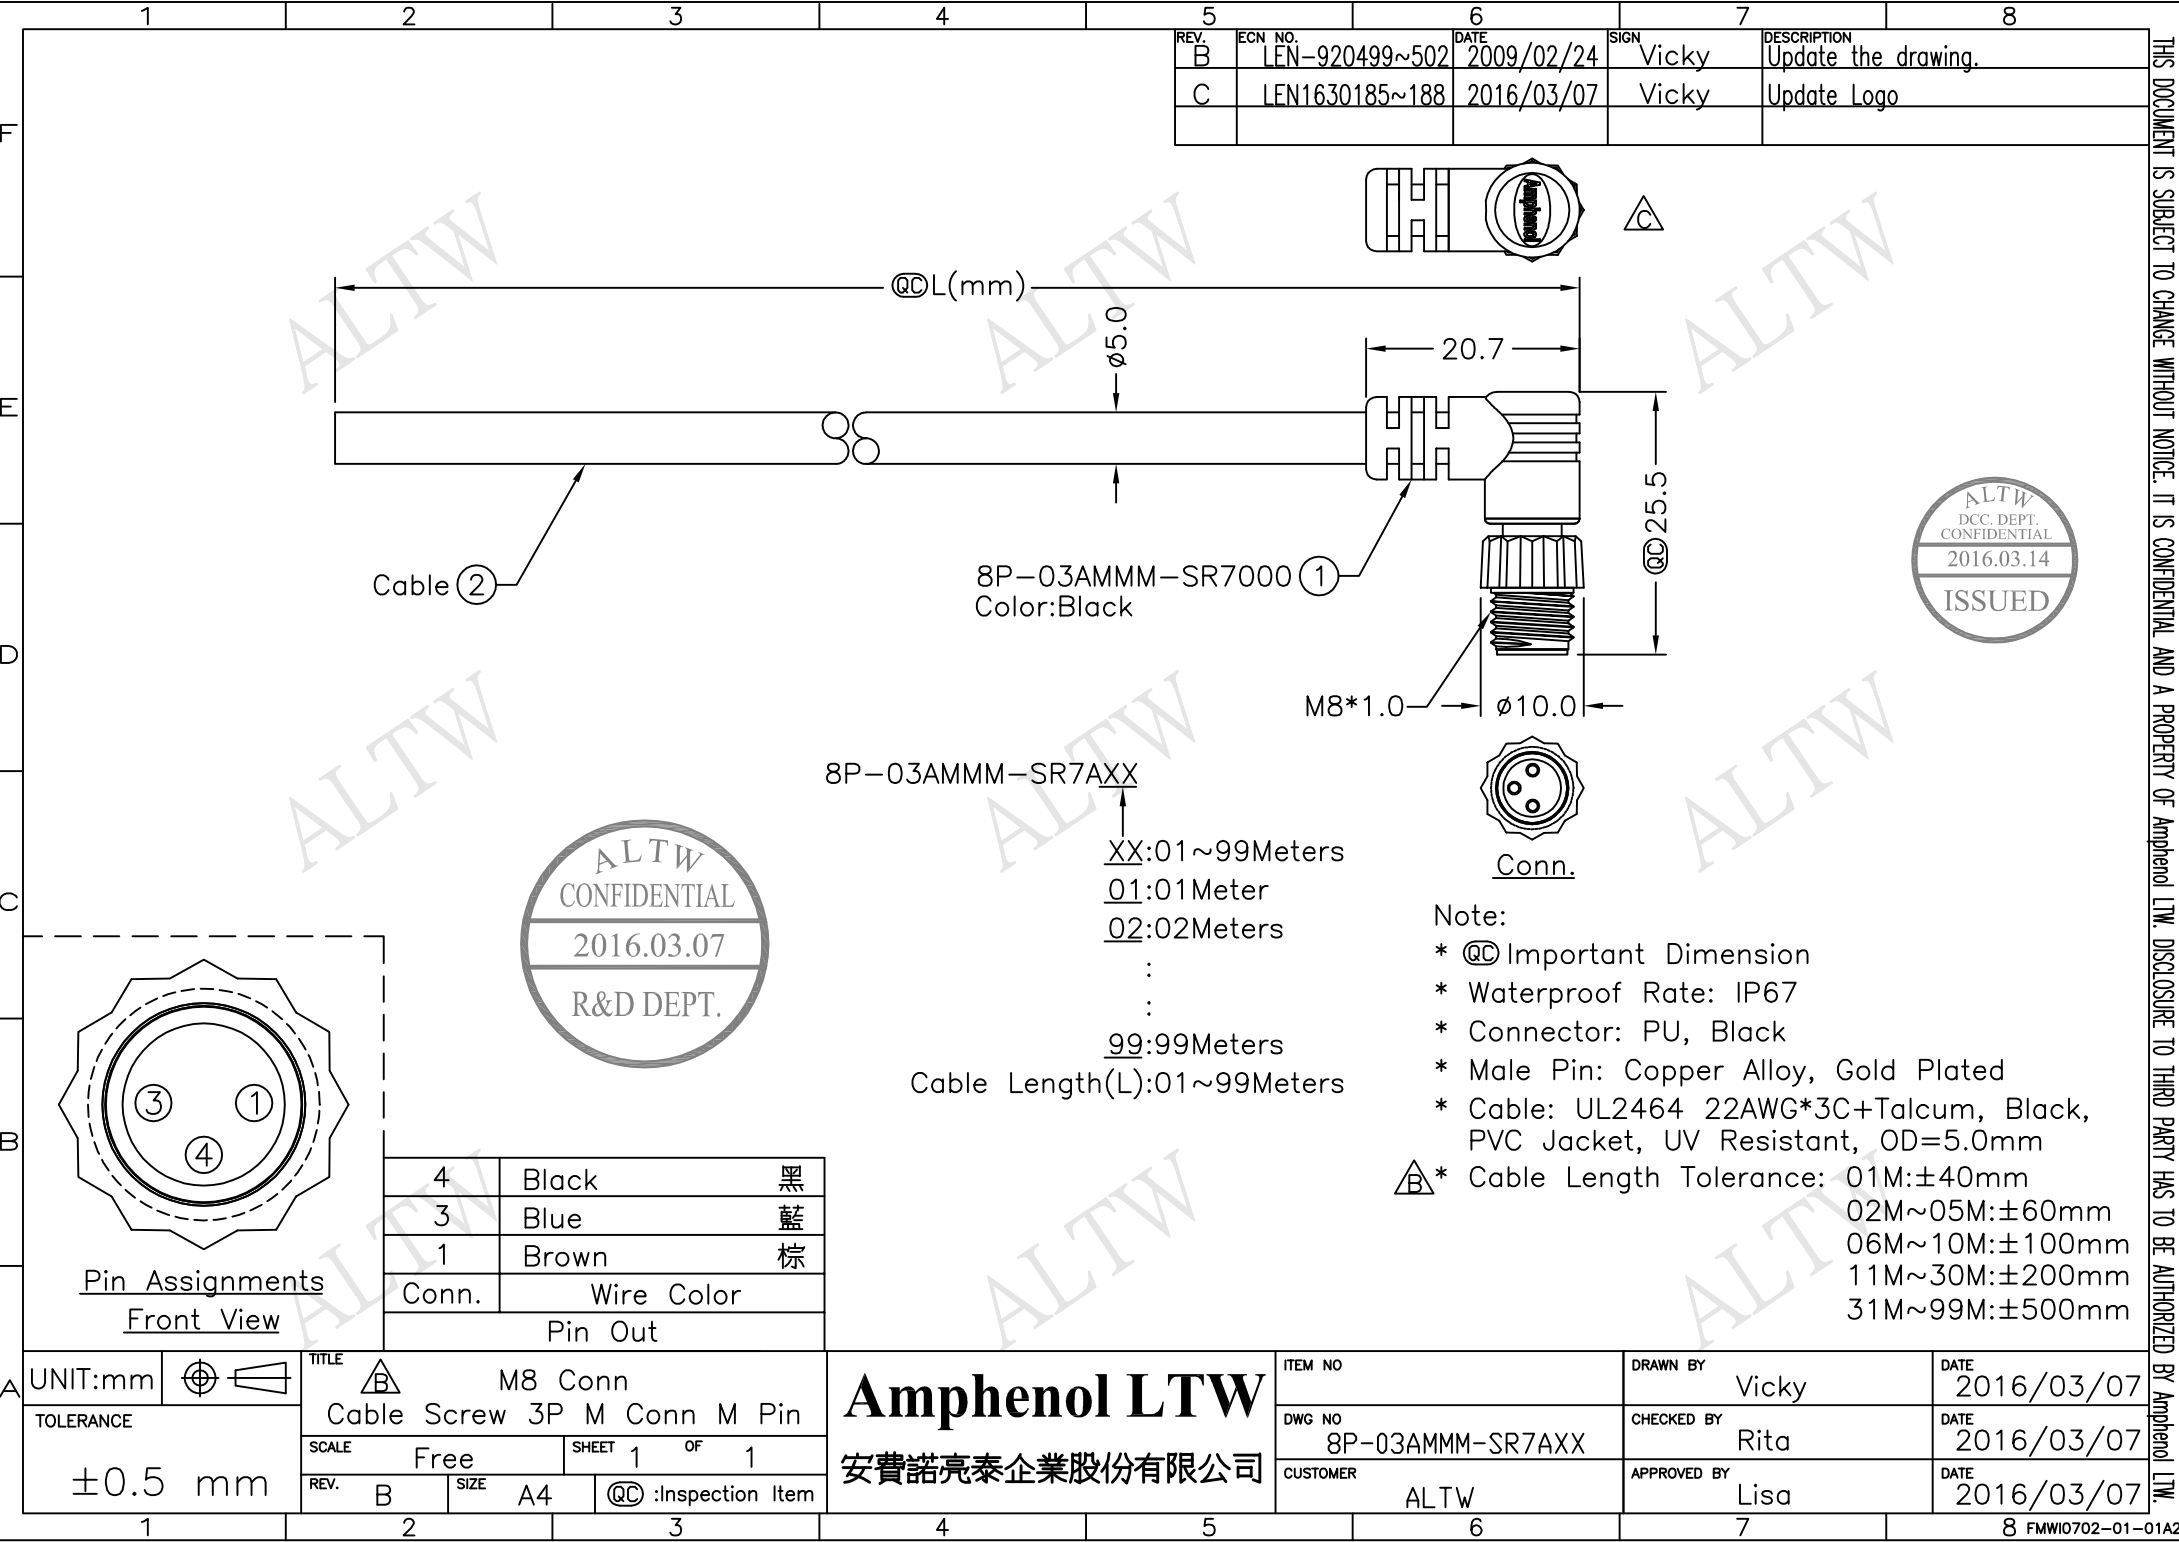

8P-03AMMM-SR7AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: PU, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 22AWG*3C+Talcum, Black, PVC Jacket, UV Resistant, OD=5.0mm
 - * Cable Length Tolerance:
 - 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm



Pin Assignments
Front View

4	Black	黑
3	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		TITLE		M8 Conn
TOLERANCE				Cable Screw 3P M Conn M Pin
±0.5 mm		SCALE	Free	SHEET 1 OF 1
	REV. B	SIZE	A4	@C :Inspection Item

Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
	DWG NO	CHECKED BY	DATE
	CUSTOMER	APPROVED BY	DATE
	8P-03AMMM-SR7AXX	Vicky	2016/03/07
	ALTW	Rita	2016/03/07
		Lisa	2016/03/07

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.