

Modular Signal Towers / KombiSIGN 72
TwinLIGHT 24VAC/DC CL



| | |
|------------------|---------------------|
| Part No.: | 647.430.75 |
| Series: | KombiSIGN 72 |



MECHANICAL DATA

| | |
|-----------------------------|-------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Clear |
| Protection category | IP65 |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 90 g |
| Product weight | 78 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 80 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

OPTICAL DATA

| | |
|----------------------|---------------------------------|
| Light source | LED |
| Light colour | White |
| Optical signal image | Blink Permanent TwinLight |
| Blink frequency | 1 Hz |
| Service life optical | 50,000 h maximum |

APPROVAL DATA


| | |
|------------------------------|---------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72
TwinLIGHT 24VAC/DC CL

| | |
|-------------------------------|-----------------------|
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| MTTF-value [years] | 2062 |

DRAWING

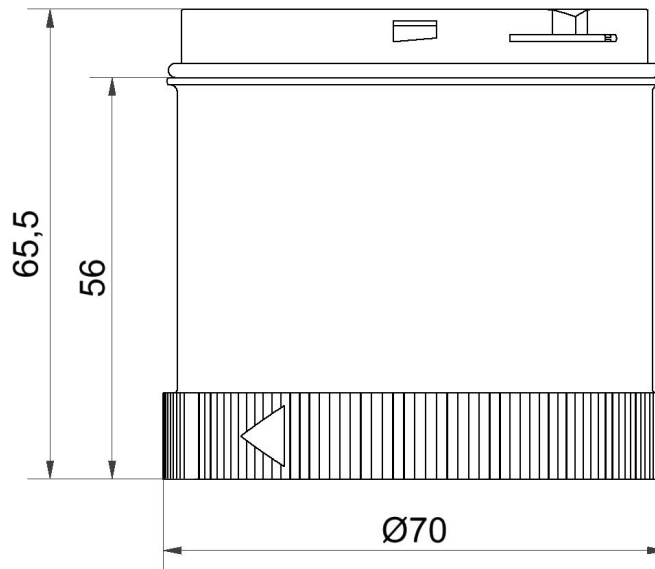

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.