



- **High Cut Resistance**
- **Light Weight**
- **Resists Acids, Bases, Solvents, and Fuels**
- **High Tensile Strength**
- **Temperature Range -274°F to 320°F**
- **Will Not Melt, Burn, or Support Combustion**

Soft, Lightweight, And Extraordinarily Strong

Extra heavy duty, tightly woven ARAMID ARMOR (KVX) is braided from aramid fibers, soft and pliable, but with 5 times the strength of steel on equal-weight basis. Aramid Armor is perfect for bundling and protecting vulnerable components from the most extreme environmental conditions. The aramid fibers provide durability, pliability, and extraordinary tensile strength.

It will not melt, burn, or support combustion. The inherent strength and heat resistance of Aramid Armor provides performance that can not be worn or aged away. Typical uses include aerospace, marine, and automotive industry applications.

Aramid Armor sleeving is available in Black and Yellow.




Aramid Flexo NX is at work every day protecting our firefighters and first responders from injury.



Aramid Armor is designed to keep wires and hoses protected in the harshest situations.



When hose and wire protection is critical, you can depend on Techflex to find the right solution.

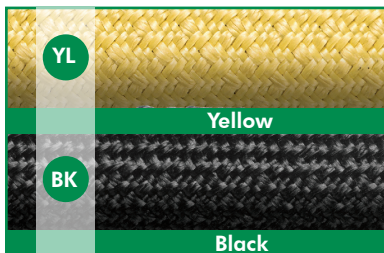

**Premium Flexo
Aramid Shears**
KVS0.00SV
(See pg. 115)

Whenever your sleeving needs superior cut protection, the cut and fire resistant properties of Aramid Armor will fill that need.

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/ 100'
		Min.	Max.	Bulk Spool	Shop Spool		
1/8"	KVX0.13BK	1/8"	1/4"	500'	100'	Black (BK)	1.22
1/4"	KVX0.25	1/4"	3/8"	500'	50'	YL & BK	1.69
1/2"	KVX0.50	1/2"	1"	250'	50'	YL & BK	3.22
1"	KVX1.00	1"	1 3/4"	200'	25'	YL & BK	4.76
1 1/4"	KVX1.25	1 1/4"	2"	125'	25'	YL & BK	5.88

*Please note that Aramid Armor is degraded by ultraviolet light. Do not store in direct sunlight. Fluorescent lighting will cause discoloration, but will not affect fiber mechanical properties.