


NOTES:

1.0 ELECTRICAL SPECIFICATIONS

- 1.1 FREQUENCY RANGE: DC to 4.0 GHz
- 1.2 VSWR: DC - 2 GHz 1.15:1 MAX.
2 GHz - 4 GHz 1.25:1 MAX.
- 1.3 MAXIMUM INPUT POWER:
0.5 WATTS AVG. AT +25°C DERATED
- 1.4 OPERATING TEMPERATURE RANGE:
-65°C to +125°C
- 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING: MARK UNIT AS SHOWN.
(REF.: INK-02639-27-85)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

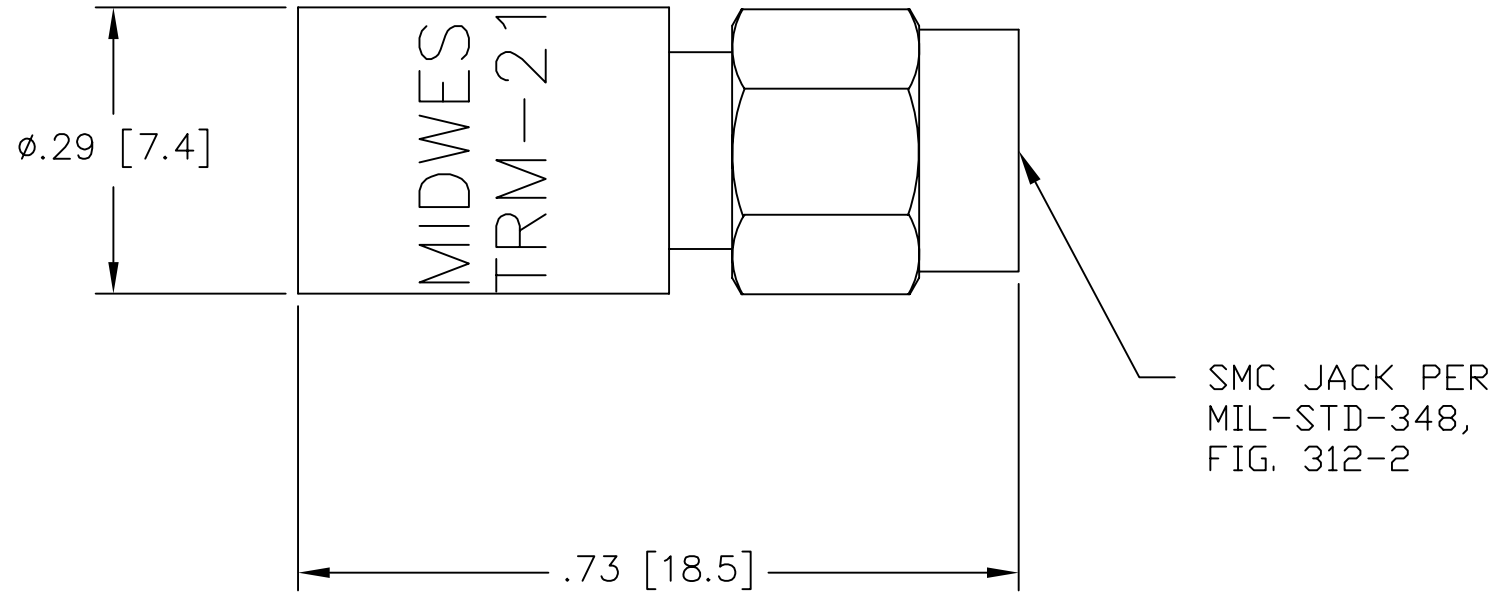

MODEL NUMBER	TRM-2199-FO-SMC-02
REV.	-

REV.	-	DESCRIPTION	RELEASED	DATE	4/15/03
------	---	-------------	----------	------	---------

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO.		34078		MIDWEST MICROWAVE	
	3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE	
2 PLACE DECIMALS ±.02		DRAWN/DATE		S. ORLOV		DRAWING NUMBER
FRACTIONS ±1/64		4/15/03		ENG./DATE		
PARALLELITY: T.I.R. _____		CHECKED/DATE		G. KOZAK		TRM-2199-FO-SMC-02
FLATNESS: T.I.R. _____		APPROVED/DATE		4/15/03		
CONCENTRICITY: T.I.R. _____		SCALE: 5=1		SHEET 1 of 1		
ANGLES AND PERPENDICULARITY: ±1'						