

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 4
 Gauge: 22 AWG 0.34 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 x 17
 Resistance at 20 °C: 59.4 Ω /km max

Insulator

Material: PVC
 Color: black, white, red, yellow
 Diameter: Ø 1.35 ±0.10 mm
 Nominal thickness: 0.28 mm
 Resistance at 20 °C: 10 MΩ /km min



Outer jacket

Material: PVC
 Color: black
 Diameter: Ø 4.85 ±0.20 mm
 Nominal thickness: 0.79 mm

Wire marking: E339579 UL AWM STYLE 2464 22 AWG 80°C 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

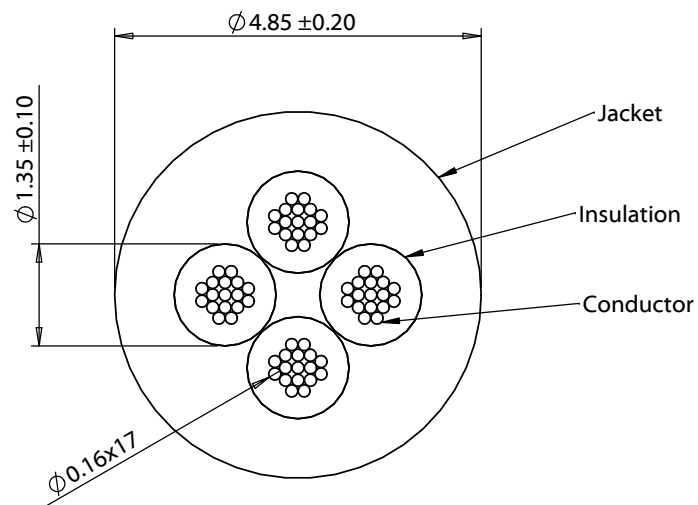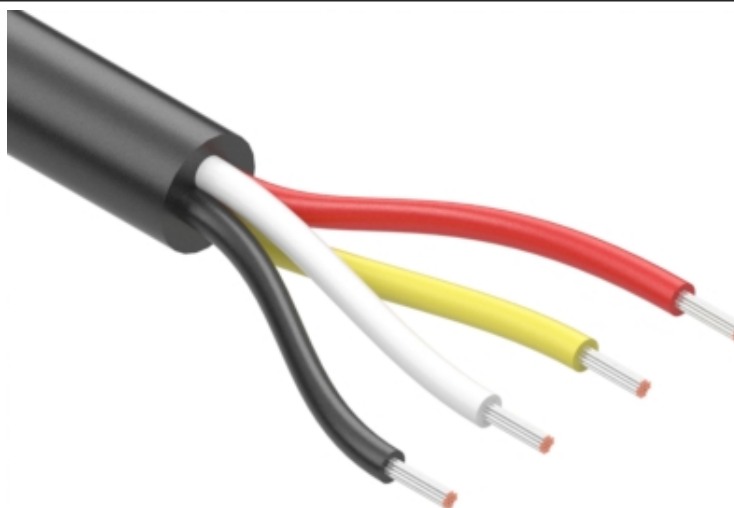

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	06/26/2014	Initial release	Verified:	RoHS and REACH compliant	
A1	09/06/2018	Increased temperature operating range	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-00386
				Description: Wire, 4C TS, 22 AWG, UL2464, 300V, 80C, 4.85 mm, VW-1, PVC	Scale: 10:1 Sheet 1 of 1