

# CGA3E2X7R1H683M080AD

TDK Item Description : CGA3E2X7R1H683MT\*\*\*B



Equivalent C1608X7R1H683M for Automotive

## Application & Main Feature

Automotive Grade ( Conductive Epoxy Application )

## Series

CGA3(1608) [EIA CC0603]



## Dimensions

- L 1.60mm +/-0.15mm
- W 0.80mm +/-0.15mm
- T 0.80mm +/-0.15mm
- B 0.20mm Min.
- G 0.30mm Min.

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

1H (50Vdc)

## Capacitance

68nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

3% Max.


## Insulation Resistance

7.35Gohm Min.


## AEC-Q200

Yes


## DC Bias Characteristic

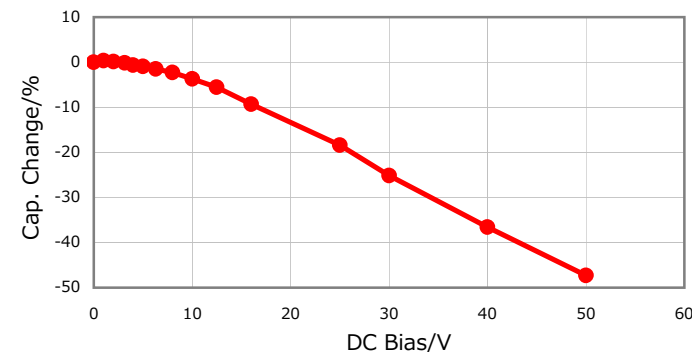


## |Z|, ESR vs. Freq. Characteristics

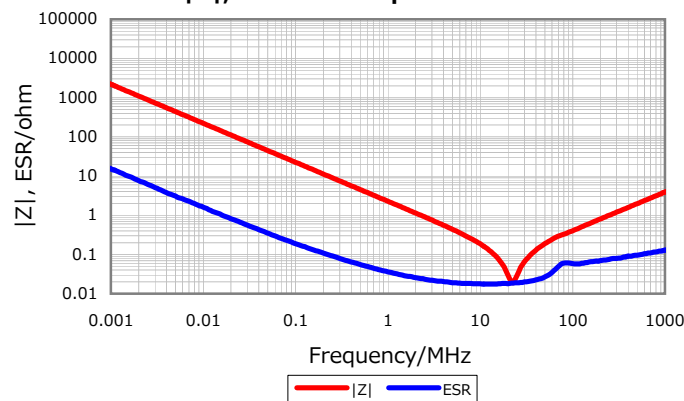


## Temperature Characteristics

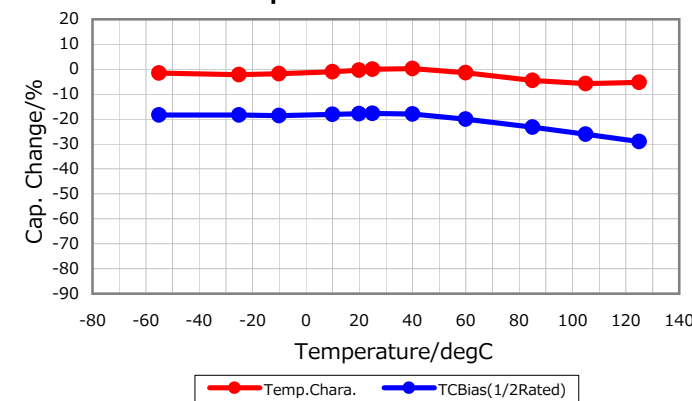

## Cap. vs. Freq. Characteristic

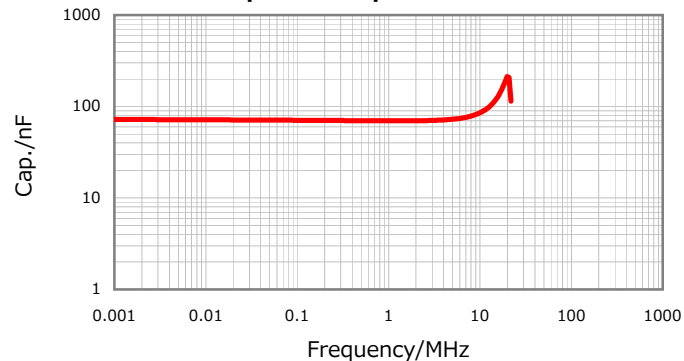

## Ripple Temperature Rise Characteristics

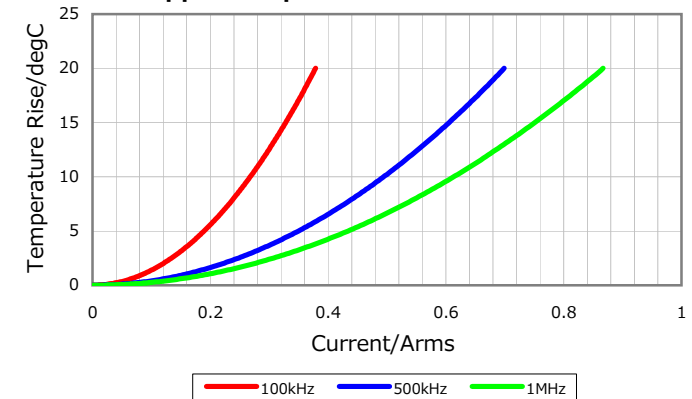

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016