

MODEL:

# PDU3MV6L2120

## 3-Phase Metered Rackmount PDU



208V  
3-Phase Input



L21-20P  
Plug



208V and 120V  
Single-Phase  
Output



48 Outlets



5.7kW Load  
Capacity



Digital Load  
Meter




0U  
Rackmount





Toolless  
Mounting  
Buttons

- A** Digital Load Meter
- B** C13 and C19 Outlets
- C** NEMA 5-15/20R Outlets
- D** Removable Cord Retention Brackets
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6-ft. Input Power Cord
- H** L21-20P Twist-Lock Input Plug
- I** Durable Metal Case




AC Input Connection: Insert L21-20P twist-lock plug into compatible L21-20R utility, generator or UPS outlet.


Also Includes: Cable Ties, Owner's Manual

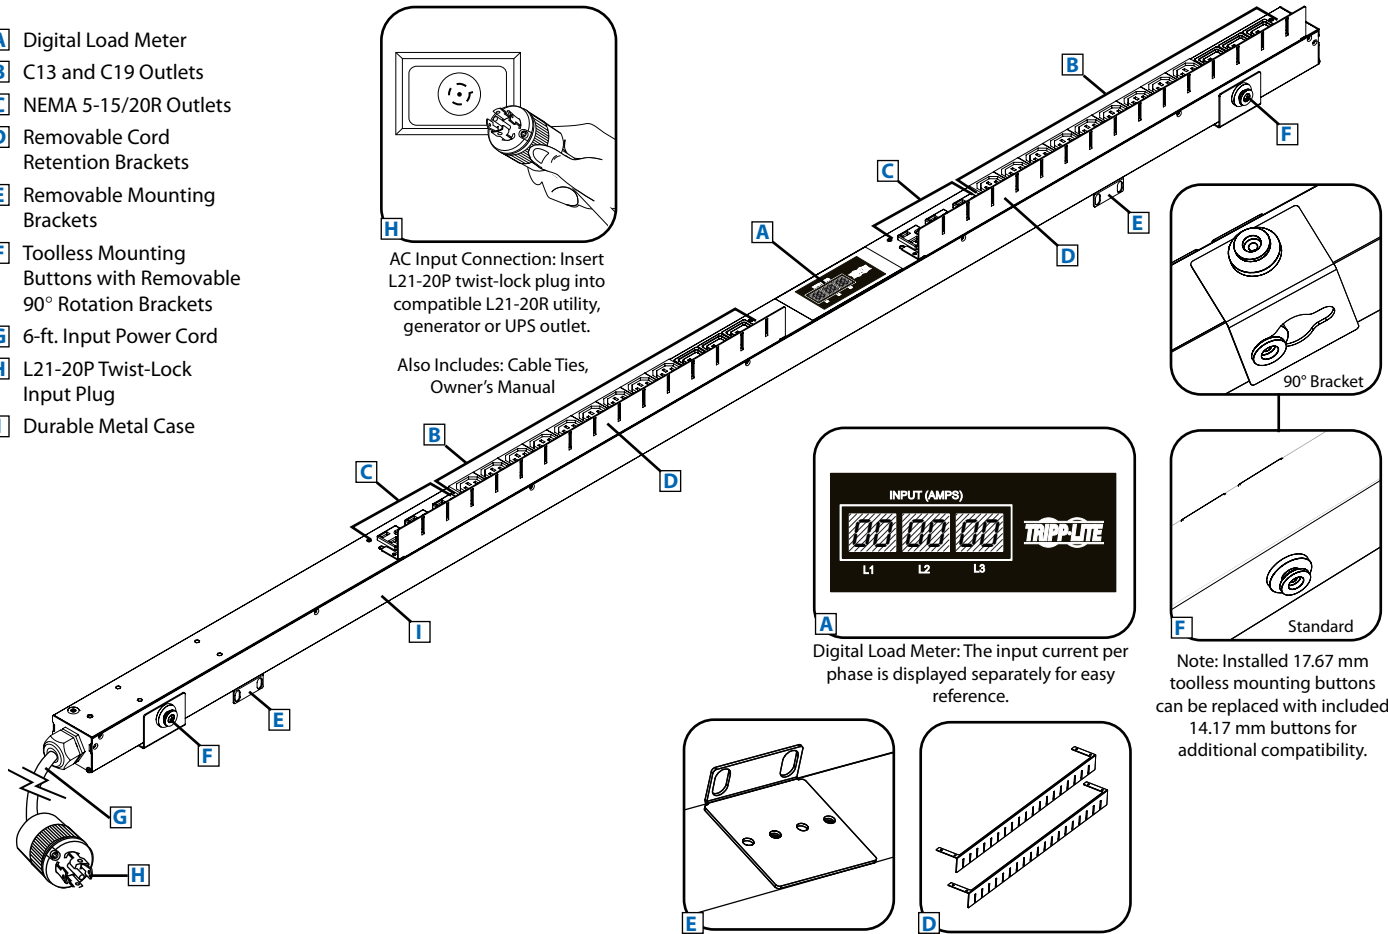

90° Bracket


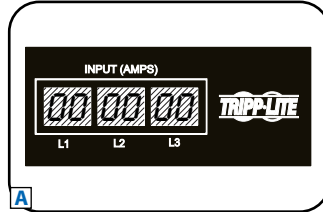


Digital Load Meter: The input current per phase is displayed separately for easy reference.



Standard

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.



### Specifications

Model	PDU3MV6L2120
Voltage	208V 3-Phase Input / 208V and 120V Single-Phase Output
Frequency	50/60Hz
Load Capacity	5.7kW
Input Plug	L21-20P
Input Cord Length	6 ft.
Outlets	48 (36 C13 / 6 C19 / 6 5-15/20R)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	12.6 lbs / 70 x 2.65 x 1.71 in. <i>See next page for detailed unit measurements.</i>
Standards	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, TAA Compliant







Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 48 outlets (12 C13, 2 C19 and 2 5-15/20R per phase)
- Displays input current for each phase in real time
- Perfect for rackmount server, network and telecom applications

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

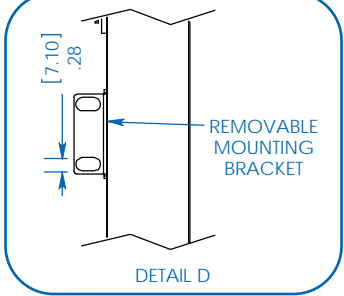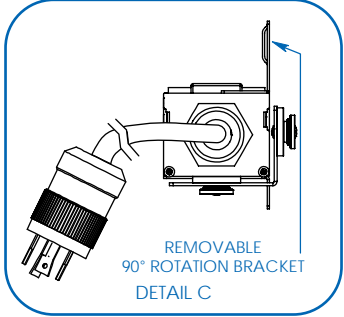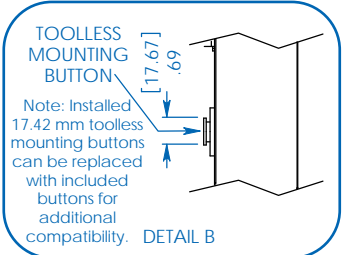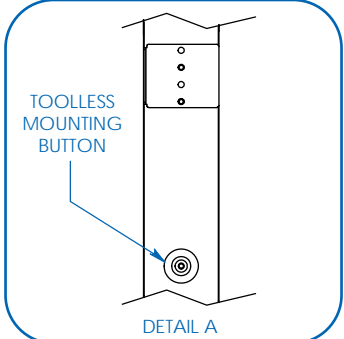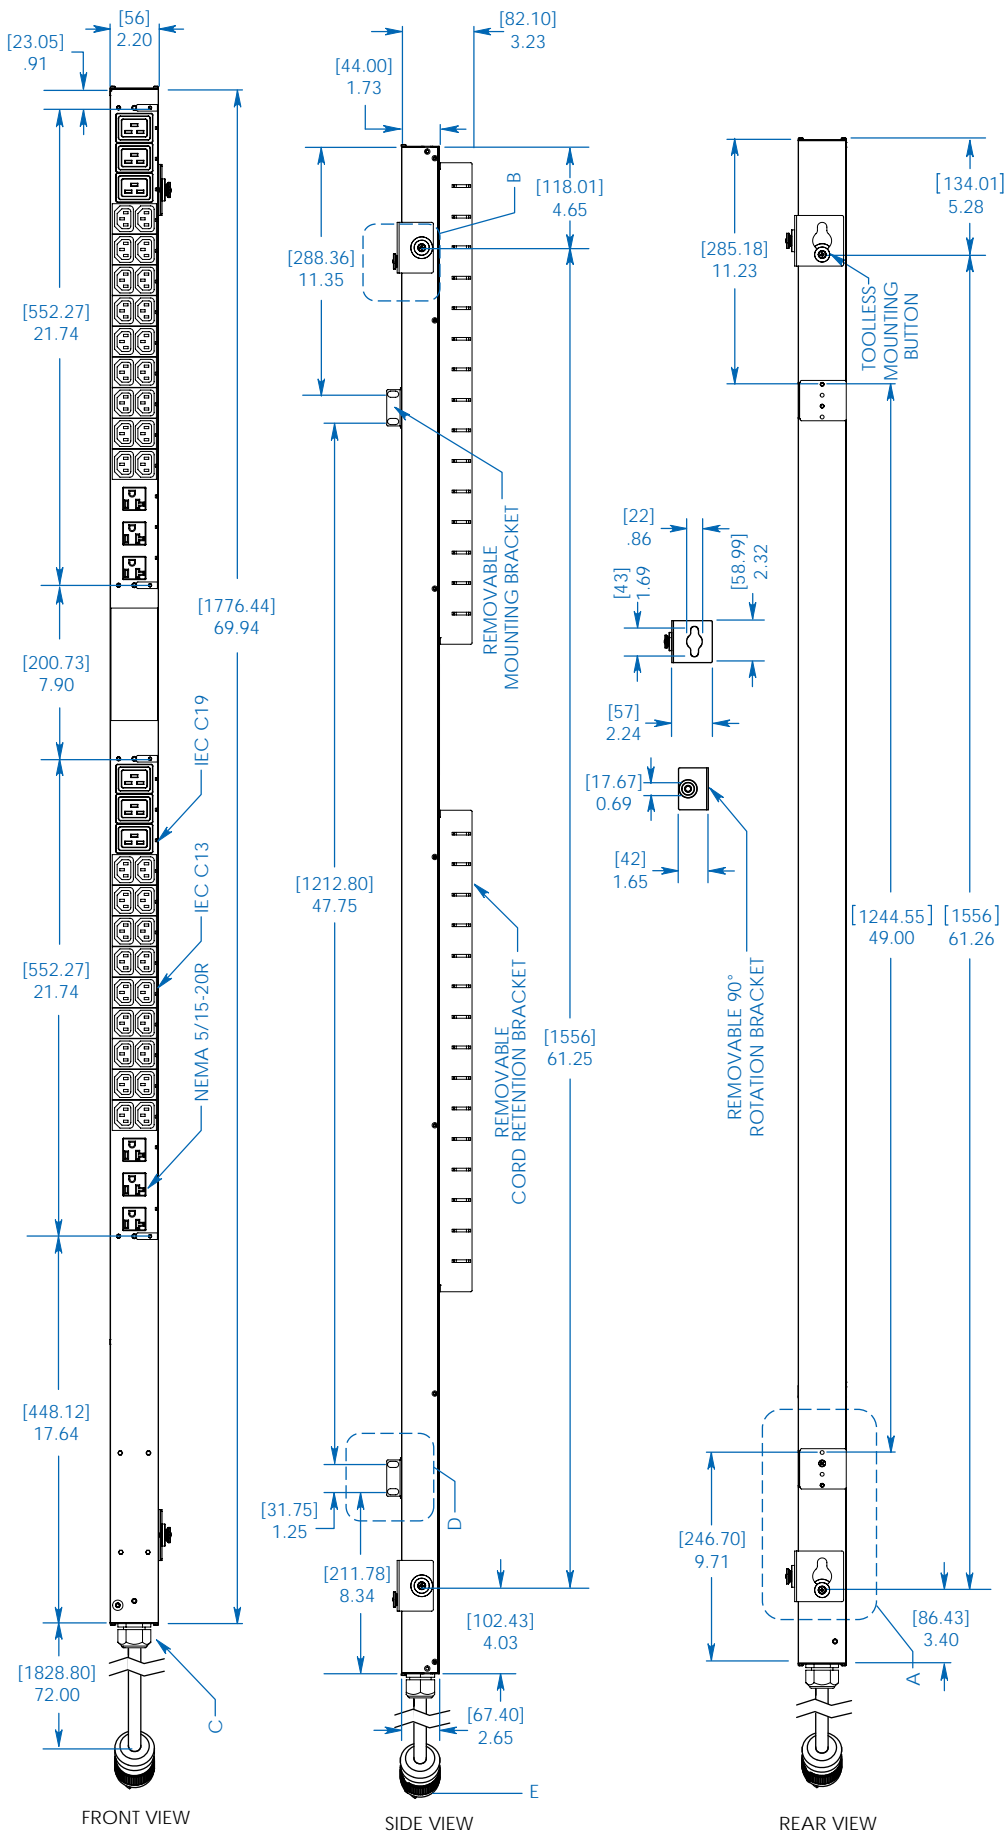

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDU3MV6L2120**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com